





D-SUBMINIATURE CONNECTORS:
K42X Series
 High Density Dual-Port D-Sub Combo

K42X-E9P/E15S-A4N Dimensions
 Dimensions in mm

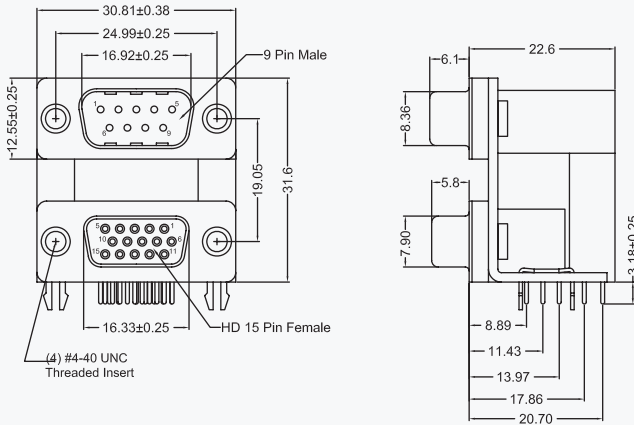

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Top Shell Size	Bottom Shell Size	Center Distance	Boardlock Option	Jackscrews Option

Series

K42X - High Density Dual-Port D-Subminiature Connector

Top/Bottom Shell Size

E9P/E15S - 9 Contact Plug over 15 Contact Receptacle

E9S/E15S - 9 Contact Receptacle over 15 Contact Receptacle

Center to Center Distance

A - 0.750" (Standard)

Boardlocks Option

4N - Boardlocks (Standard)

Jackscrews Option

Blank - No Jackscrews

J - #4-40 Jackscrews Installed

Contact Kycon for Other Options