


Data sheet | Item number: 706-3057/301-300

System cable; for Schneider TSX; 8 digital inputs or outputs; Length: 3 m;

Conductor cross-section: 0.14 mm²

www.wago.com/706-3057/301-300

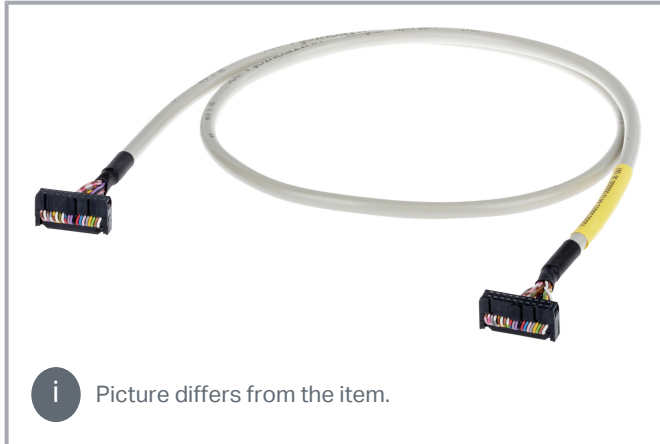

Data

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

Electrical data

Inputs/outputs	8 digital inputs or outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Compatible PLC Modules	Schneider TSX
Compatible PLC I/O Card Types	TSX DEY 08D2 TSX DSY 08T2
Connection type (1)	System
Pole number 1	10
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	20
Connector 2	Schneider TSXBLY01

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Cable type	LiYY
Wire cross-section	0.14 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	3 m
--------------	-----

Material data

Weight	1.1 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	box
GTIN	4055143037846

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3057/301-300	URL	Download
System cable; for Schneider TSX; 8 digital inputs or outputs; Length: 3 m; Conductor cross-section: 0.14 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!