
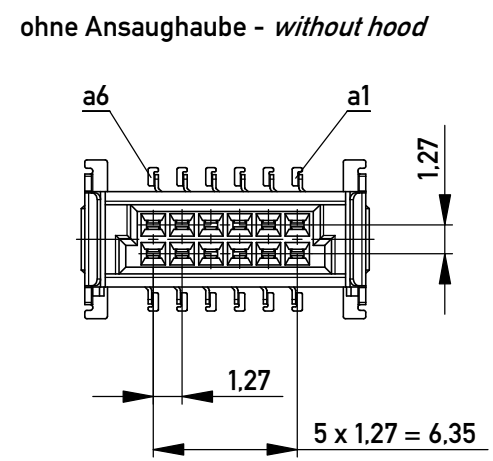
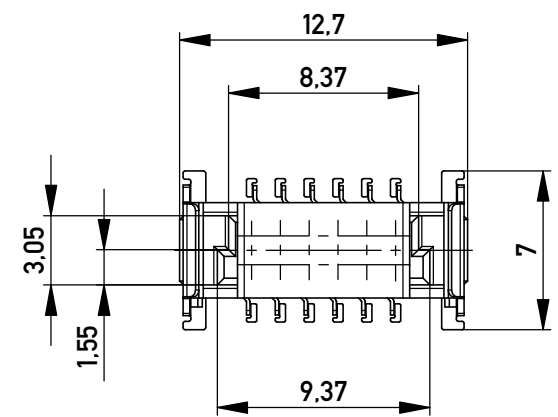
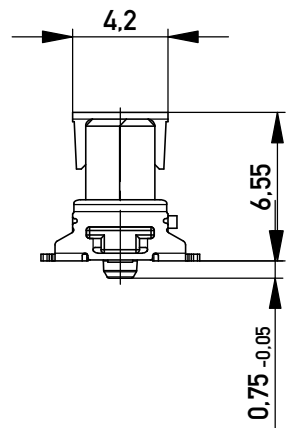
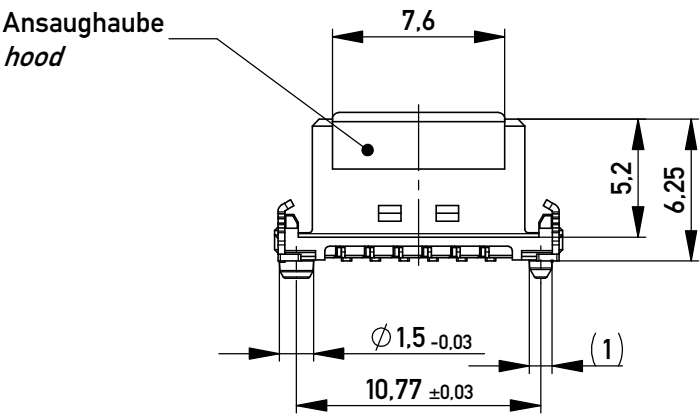


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

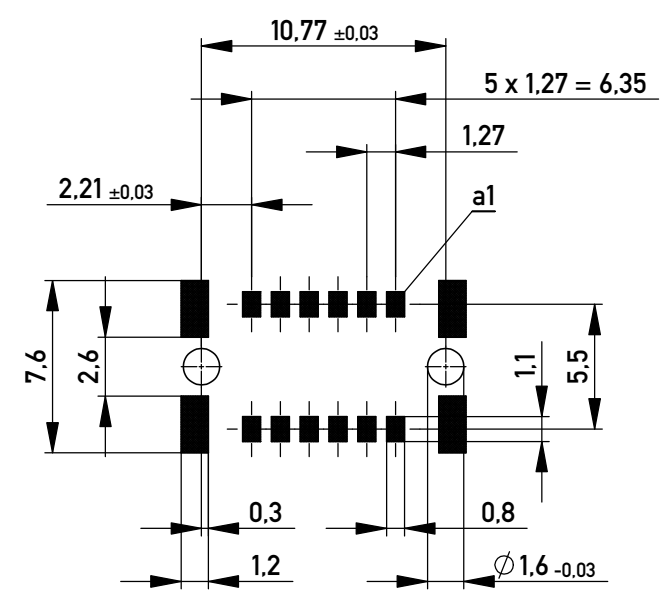


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
Packaging unit: 280 pcs

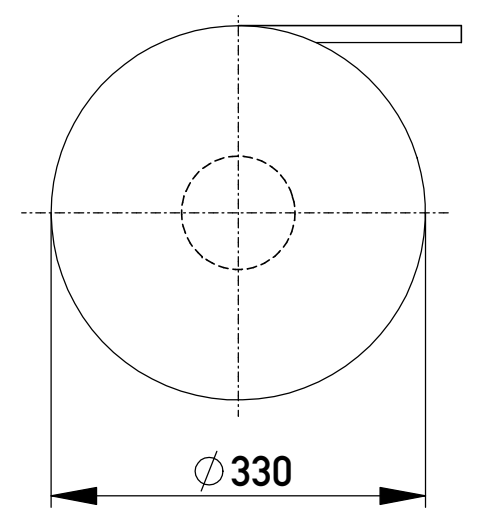


Abspulrichtung - Reel off Direction

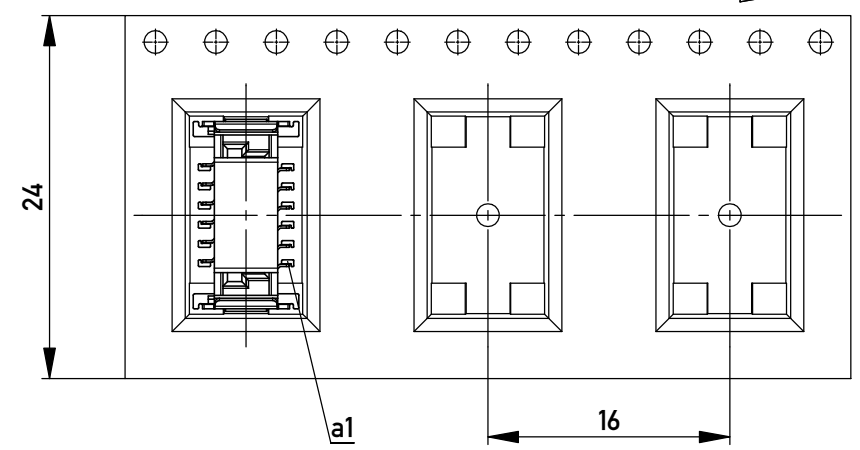

BA 7-13 - 8mm Bauhöhe
type7-13 - low profile

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16116 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 3:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation Federl. SMC-B 12-SMD-BA7-13 <i>Female SMC-B 12-SMD-type7-13</i>					
						 www.ERNI.com		100804280001			
								Class SMCB			
d		29.03.2016									
Index		Date									

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.