

UF175AMA series



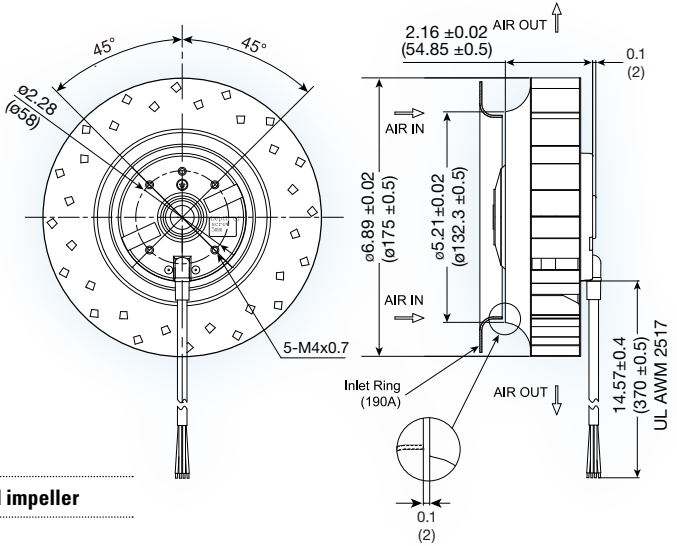

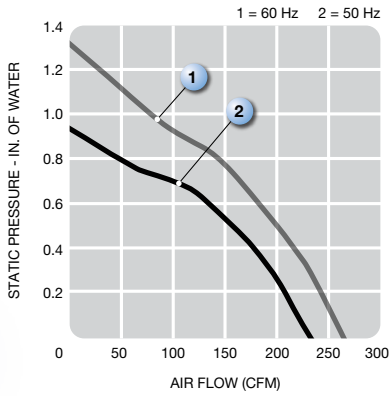

(175 dia. x 55 mm)

6.89 dia. x 2.16 inches

Features:	**backward curved impeller**
Operating voltage:	115 or 230 VAC
Construction:	aluminum die cast motor base; steel impeller
Bearing option:	ball bearing
Motor:	permanent split capacitor required capacitor included
Air Flow:	centrifugal
Connection:	22 AWG lead wires
Protection:	thermal

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Locked Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	A	RPM	M³/Min.	CFM	MM	INCH	dbA	kg
UF175AMA12-H1C2A	115	50	60	0.55	0.82	2,550	6.5	230	23	0.9	66	1.3
	115	60	66	0.55	0.84	2,900	7.5	265	33	1.3	70	1.3
UF175AMA23-H1C2A	230	50	60	0.27	0.41	2,550	6.5	230	23	0.9	66	1.3
	230	60	66	0.28	0.42	2,900	7.5	265	33	1.3	70	1.3