


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/14	

6
5
4
3
2
1

APPROVED: _____
DATE: _____ TITLE: _____

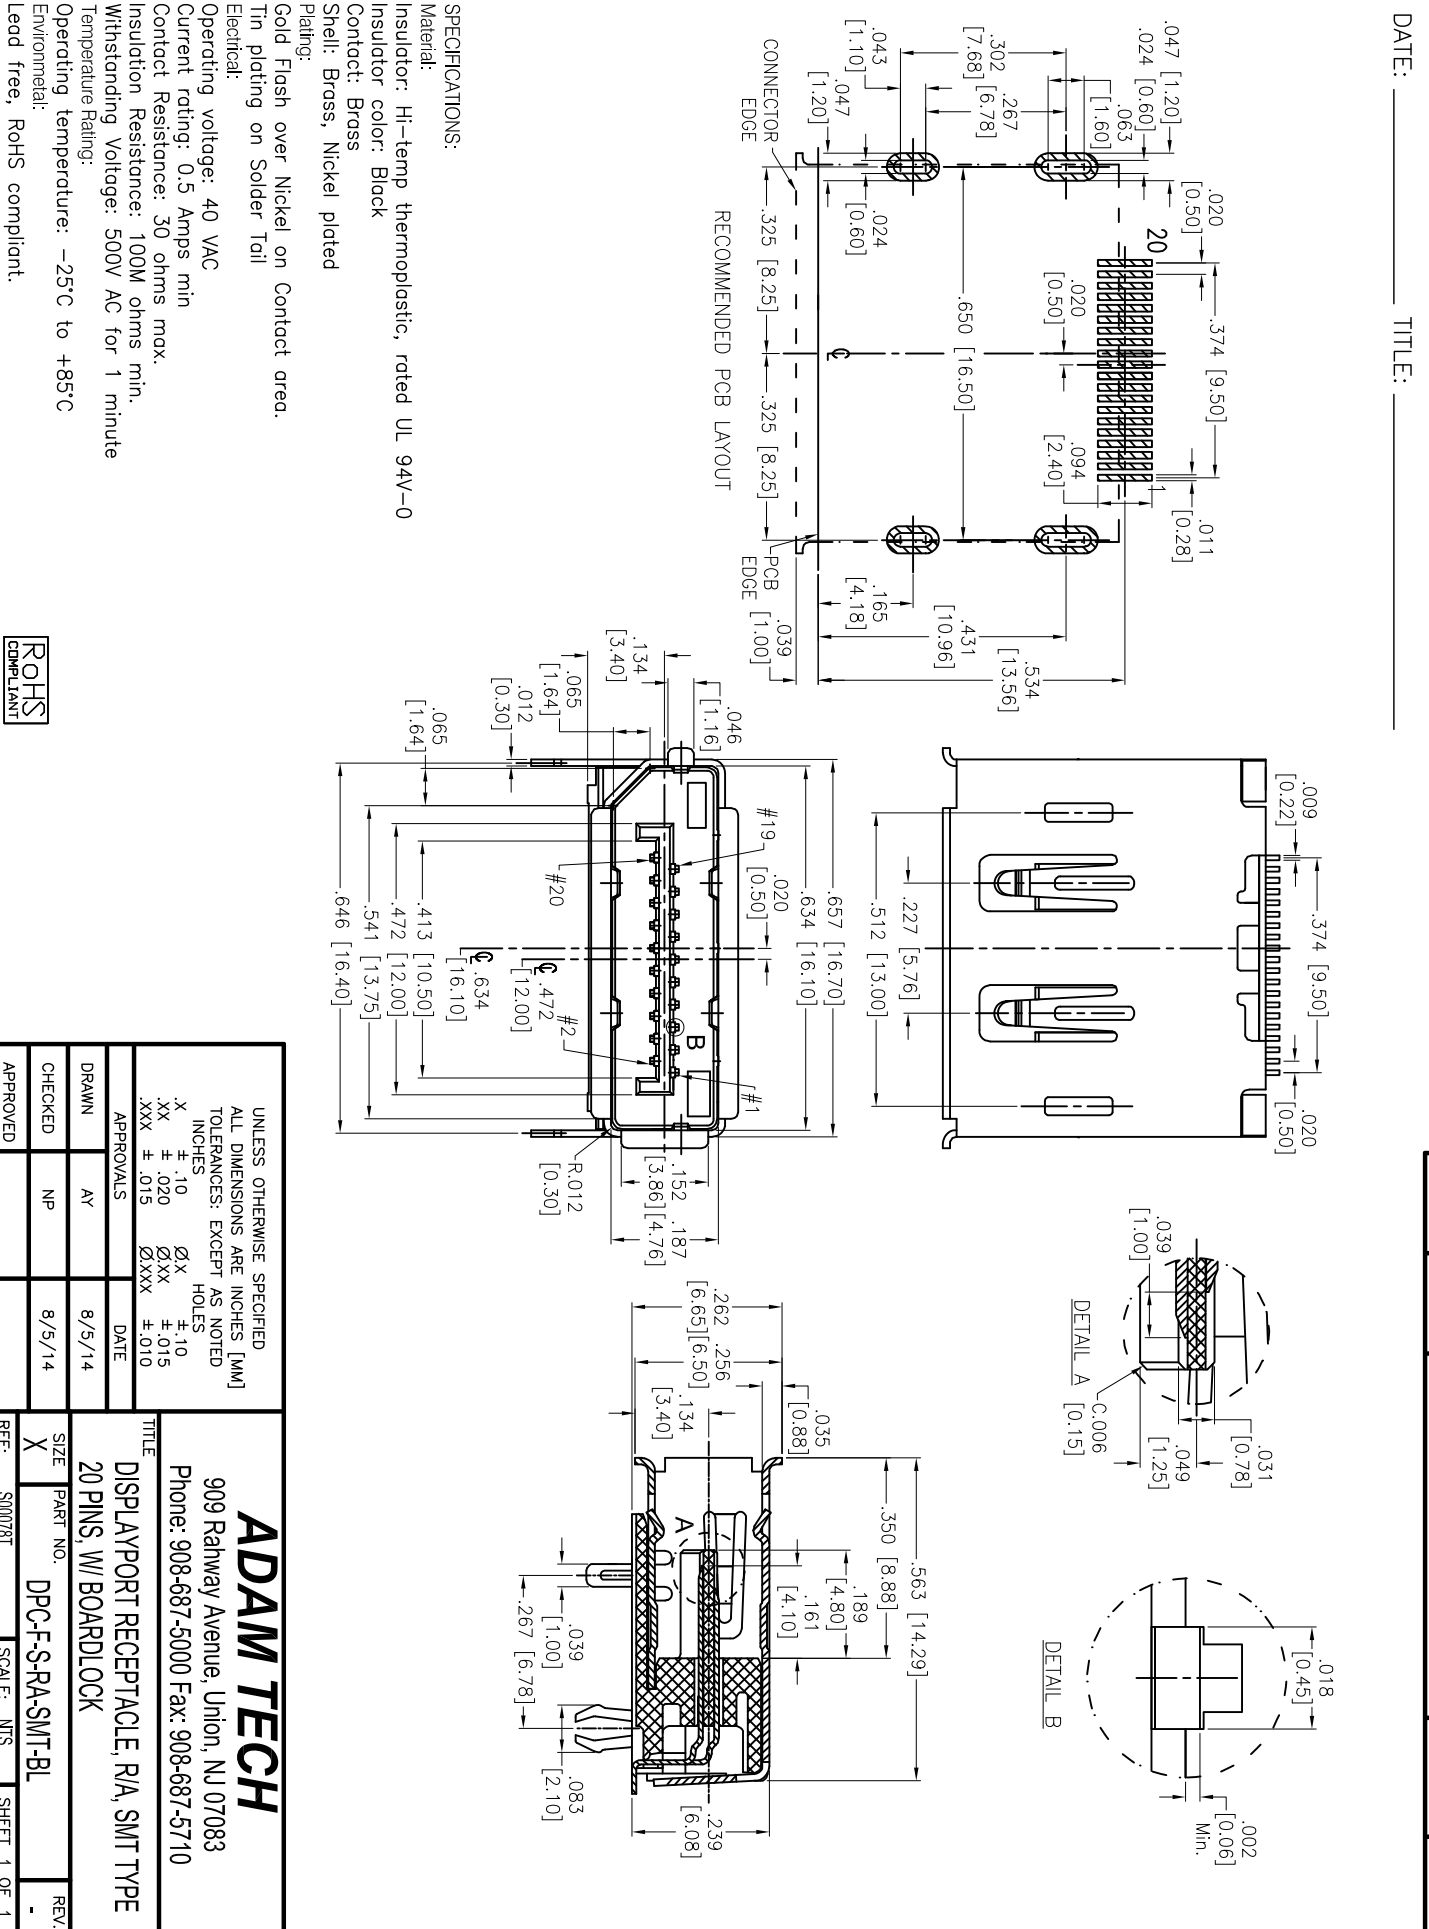

A
B
C
D

6
5
4
3
2
1



SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contact: Brass
 Shell: Brass, Nickel plated
 Plating: Gold Flash over Nickel on Contact area.
 Tin plating on Solder Tail
 Electrical:
 Operating voltage: 40 VAC
 Current rating: 0.5 Amps min
 Contact Resistance: 30 ohms max.
 Insulation Resistance: 100M ohms min.
 Withstanding Voltage: 500V AC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES	DATE
.X ± .10	ØX ± .10	
.XX ± .020	ØXX ± .015	
.XXX ± .015	ØXXX ± .010	

APPROVALS	DATE
DRAWN AY	8/5/14
CHECKED NP	8/5/14
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **DISPLAORPT RECEPTACLE, R/A, SMT TYPE**
20 PINS, W/ BOARDLOCK

SIZE	PART NO.	REV.
X	DPC-F-S-RA-SMT-BL	

REF: S00078T SCALE: NTS SHEET 1 OF 1