SMD CMOS output
11.4 x 9.6 x 3.0 mm



RoHS Compliance

Features

- Tri-state function available.


Applications

- CPU , Graphics , Multimedia A / V clocks
- MPEG / DVD / HDTV clocks
- Laser engine pixel / set - top clocks
- OC-3 , OC-12 , OC-48 and OC-192 clocks
- SONET / SDH / ATM clocks
- Fast Ethernet and Gigabit Ethernet clocks
- NTSC / PAL encoder / decoder clocks
- PLL / synthesizer clocks
- Fibre channel and ADSL clocks

General Specifications

Paramenters		Electrical Spec.							
Input Voltage (V_{DD})		3.3 V ± 5 %							
Frequency Range / Load		125.1 ~ 200.0 MHz / [15pF load]							
Output Wave Form		CMOS output							
Output Logic High " 1 "		0.9 V (min.)							
Output Logic Low " 0 "		0.1 V (max.)							
Integrated Phase Noise		2.4 ps (typical) ; 4.0 ps (max.)							
Rise Time (Tr) / Fall Time (Tf)		2.4 n sec.(typical) [0.3 V ↔ 3.0V, 15 pF load]							
Duty Cycle		50% ± 10% [50% ± 5% is also available]							
Current Consumption		45 mA max.							
Start - Up Time (Ts)		10 m sec.(typical)							
Storage Temperature		- 50°C to 100°C							
Aging		± 3 ppm per year (max.)							
Frequency Stability [1] Codes	Frequency Stability over Operating Temperature Range	± 25 ppm	± 50 ppm	± 100 ppm	If non-standard , please enter the desired stability after the " C " or " I " For example : " C20 " ±20 ppm over -10°C to +70°C ; " I20 " ± 20 ppm over -40°C to +85°C				
	Commercial (*-10°C to +70°C*)	*A*	*B*	*C*					
	Industrial (*-40°C to +85°C*)	*D*	*E*	*F*					
Phase Noise (typical)		Offset	10 Hz	100 Hz	1K Hz	10 KHz	100KHz	1 MHz	10 MHz
		dBc / Hz	-65	-95	-120	-125	-121	-120	-140

Outline Dimensions (Unit : mm)

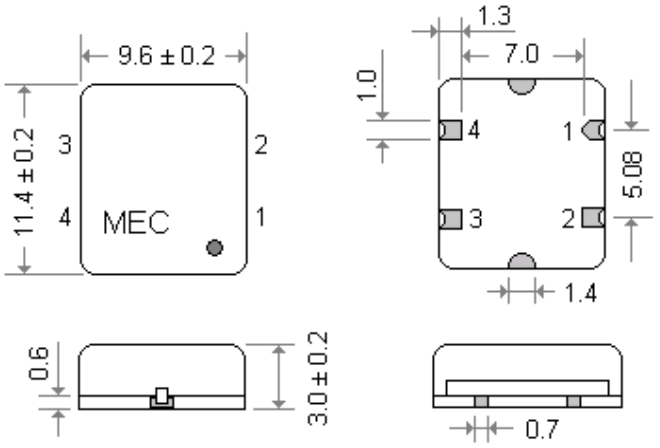

Pad Connections			
1	Tri - state	3	Output
2	Ground	4	Supply Viltage

Mercury www .mercury-crystal.com

■Taiwan : (886)-2-2406-2779 / sales-tw@mercury-crystal.com ■U.S.A: (1)-909-466-0427 / sales-us@mercury-crystal.com ■China : (86)-512-5763-8100 / sales-cn@mecxtal.com