
RoHS

Specifications

Nominal Size	28 x 28 x 11.2 mm	(See attached drawing)		
Impedance	8 Ohm ± 15%	at	1K Hz 1 V	
Resonant frequency	310 Hz ± 62 Hz at	1 V		
Sound pressure level	82 dB/w ± 3 dB	1 w 50 cm ave. at 0.5K, 0.6K, 0.8K, 1.0KHz		
Response	Fo Hz ~ 20 KHz max 10 dB			
Input power	Nominal	2 W	Handling capacity	4 W
Operation	must be normal at program source 2 W			
Buzz, rattle, etc.	must be normal at sine wave 4 V			
Magnet	Size: 14.7 x 3.0 mm			
Load test	White noise	2 W	for	24 hours
Heat test	65 ± 2° C	20-50% R.H.	24 hours	
Humidity test	40 ± 2° C	90-95% R.H.	24 hours	


Frequency Response Curve


Potentiometer range	50 dB
Rectifier	RMS
Lower limit frequency	20 Hz
Wr. speed	100 mm/sec

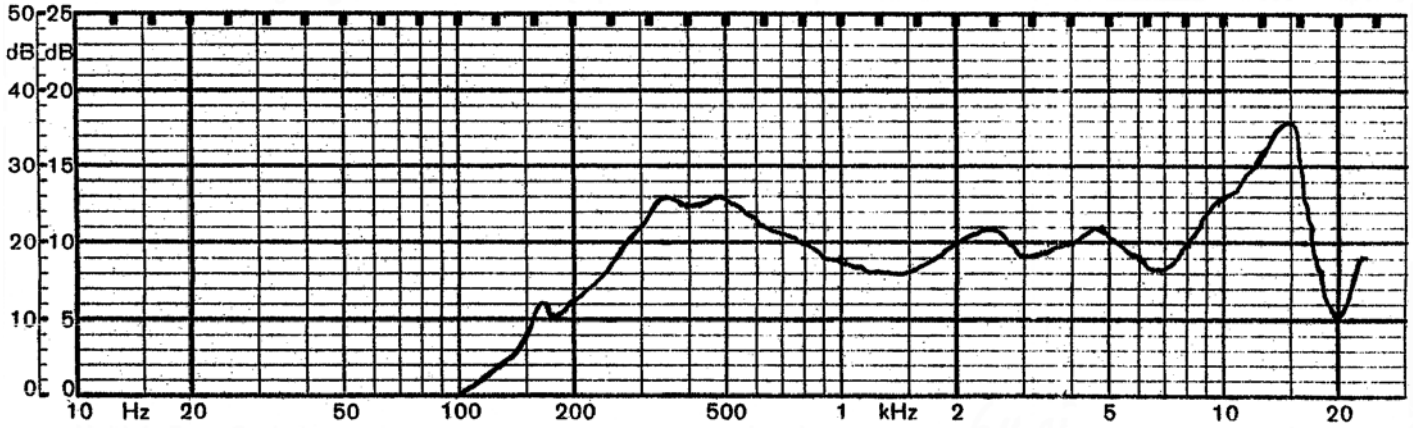


Zero level 60 dB

REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/2/2006

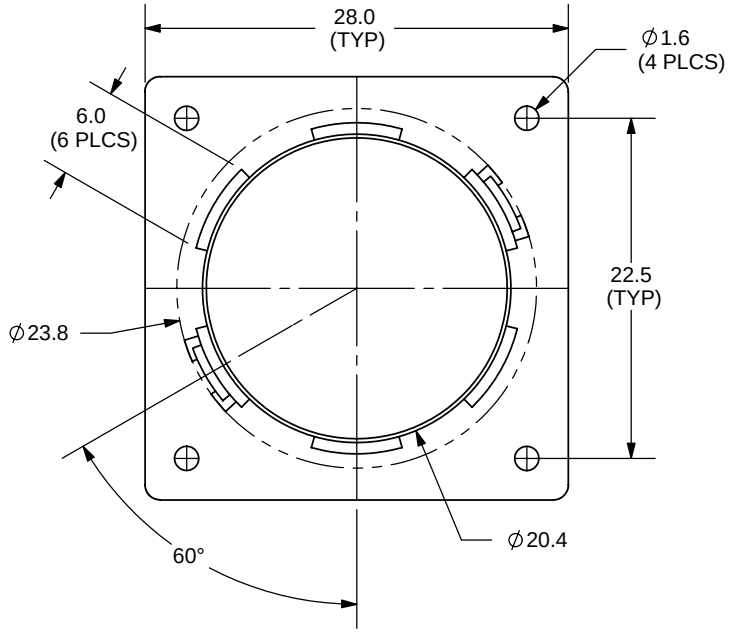

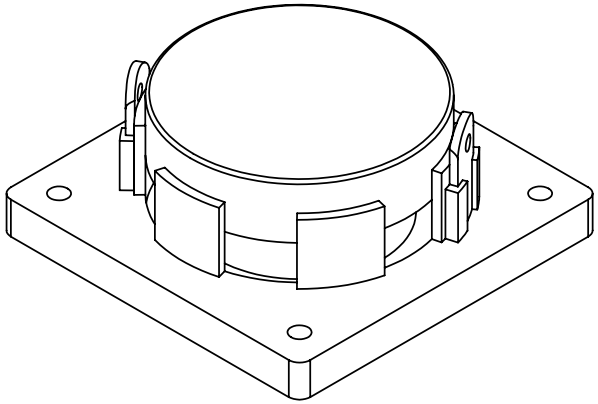

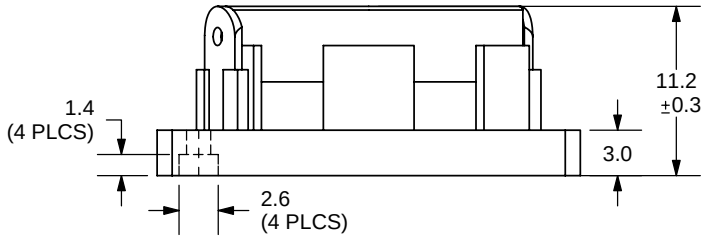

TOLERANCE:
±0.2mm UNLESS OTHERWISE SPECIFIED

RoHS

CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

TITLE: MINIATURE MONITOR SPEAKER		REV: A
PART NO. CMS0281KLX	UNITS: MM [INCHES]	
DRAWN BY: ZRJ	APPROVED BY:	SCALE: 2:1

PC FILE NAME:
CMS0281KLX

COPYRIGHT 2006 BY CUI INC.