




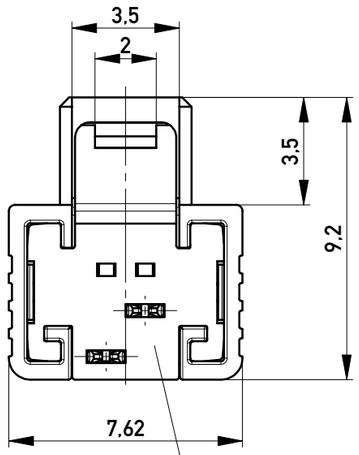

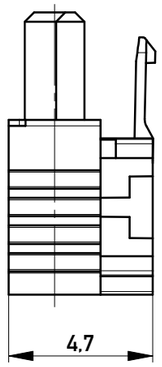


mit aufgesetzter Kabelführung (Anlieferungszustand)
with cable guide mounted (state at time of supply)

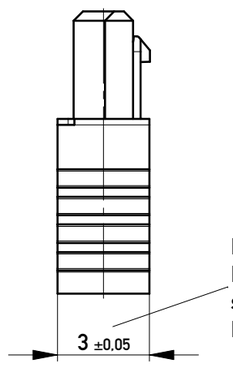


Kabelführung verpresst
(cable guide pressed on)


Funktionsrelevantes Prüfmerkmal
siehe Verarbeitungsspezifikation
MiniBridge ERNI Electronics GmbH

Verpackt in Tray - *tray packaging*
Verpackungseinheit 280 Stück - *packaging unit 280 pcs*

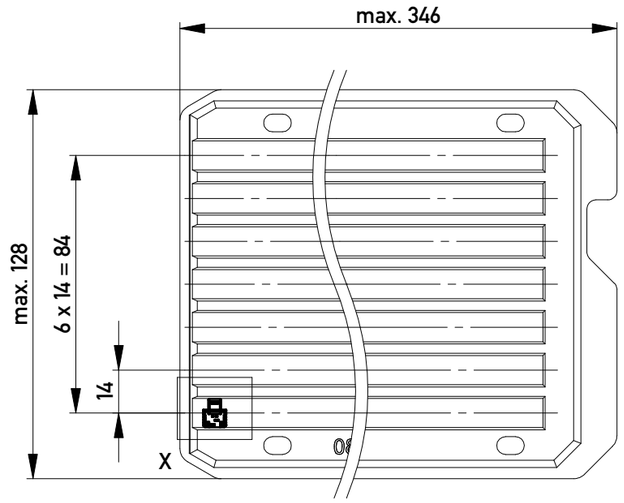

Einzelheit X - *detail X*
M 2:1

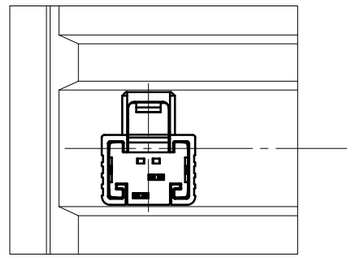

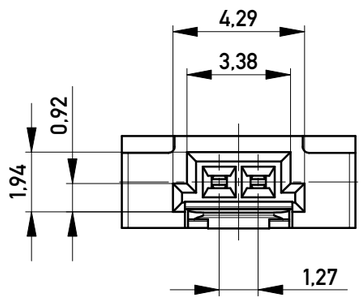

Federkontakt AWG 24-26 - *Female Contact AWG 24-26*
Kabelführung ⌀1,07 - *cable guide ⌀1,07*

nur mit Hilfsmittel lösbar
only with tool unlockable

Information:

Tolerances

All Dimensions in mm

Scale 5:1

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
F 1,27 SRC A IDC 02-pin
d=1,07 AWG 24/26 Positive Lock

www.ERNI.com

100403210122

K

A3

Index		Date	
b		20.01.2016	

Class SRCA