


AUDIO TRANSFORMER


Turns ratio	1 : 1 ± 2%			
Parameter	Min.	Typ.	Max.	Units
DC Resistance Pins 1-2			85	Ω
DC Resistance Pins 4-3			110	Ω
Dielectric Rating	1250			VAC
Insertion Loss			1.7	dB
Frequency Response 50Hz - 15kHz		0.5		dB
Return Loss 200-4000 Hz vs 600 Ω		2.3		dB

Schematic Diagram



Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C

Dimensions in Inches (mm)

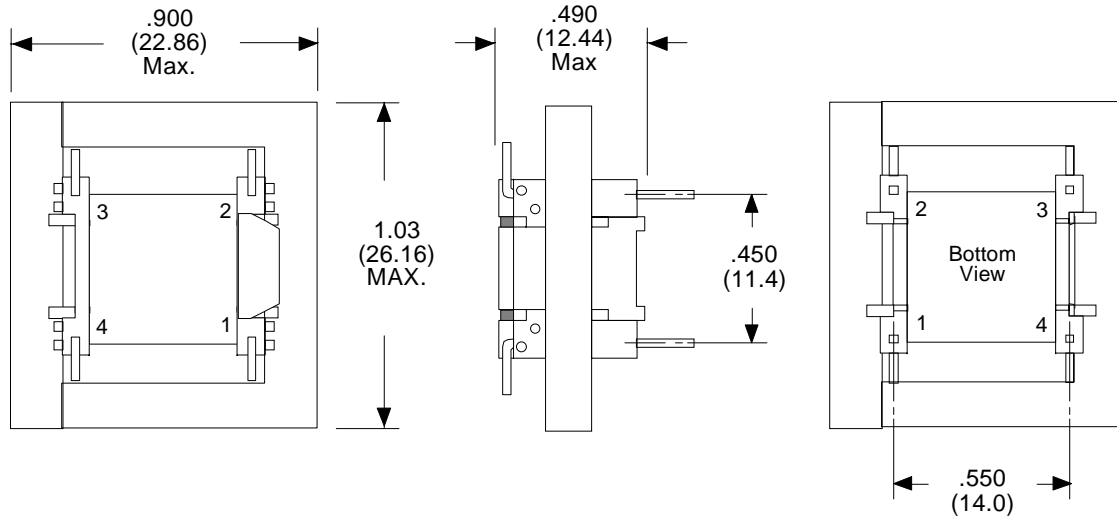

RHOMBUS P/N: T-1399

CUST P/N:

NAME:

DATE: 03/07/01

SHEET: