


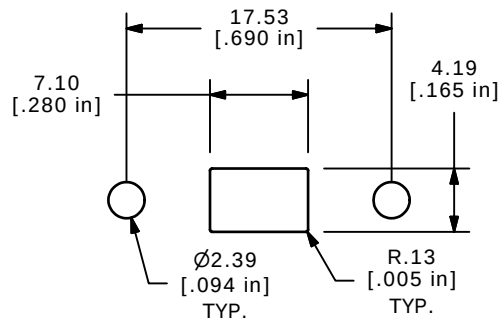


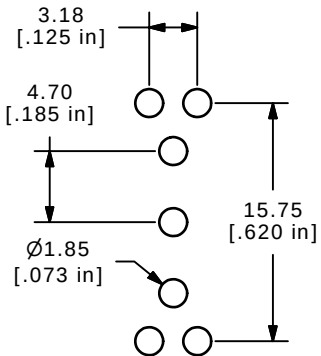

RECOMMENDED PANEL CUTOUT

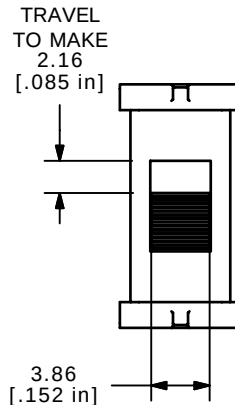


P.C.B. LAYOUT

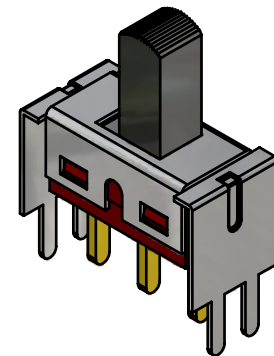



ISOMETRIC

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	ON
2-1	OPEN	2-3



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4 (VA) MAX. @20V MAX.
6. ELECTRIC LIFE: 30,000 ACTUATIONS
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

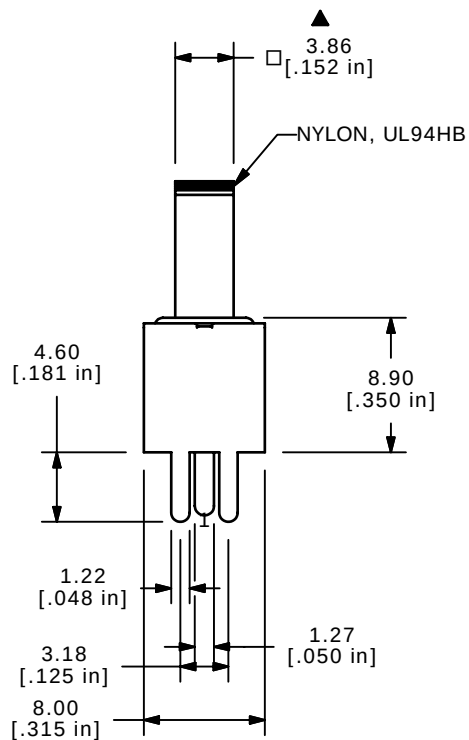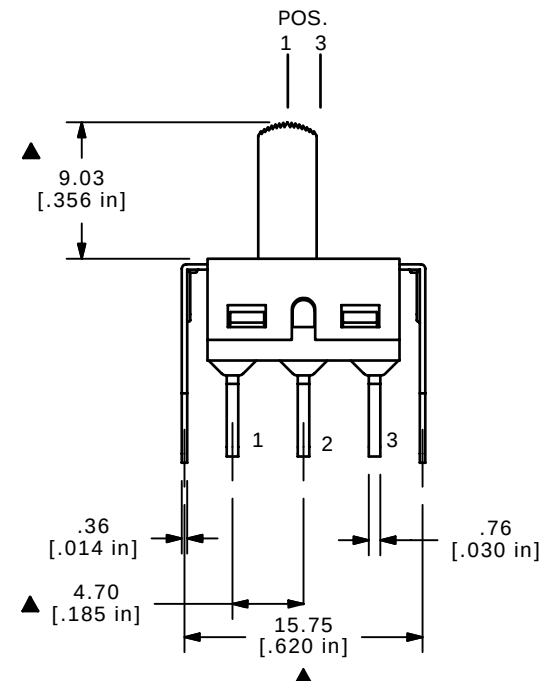

F	15970	UPDATE SWITCH TRAVEL DIM.	4/18/06	CT
E	15901	EDIT PANEL MOUNT DIM	3/27/06	PH
D	15713	ADD ROHS NOTE	1/26/06	PH
C	15190	CHANGED DIMENSION FROM 9.98 TO 8.9	8/22/05	PH
B	15121	CHANGED BRACKET FROM "B"	8/4/05	RC
A	14998	RELEASED FOR PRODUCTION	6/15/05	JB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 500SSP3S3VS2REA

SCALE 2:1

DATE 6/15/2005

DR
JB

DWG T509000

REV
F