
International
IOR Rectifier

IRLH5030PbF

HEXFET® Power MOSFET

V_{DS}	100	V
$R_{DS(on)\ max}$ ($@V_{GS}$ = 4.5V)	9.9	mΩ
$Q_{g\ (typical)}$	44	nC
$R_{G\ (typical)}$	1.2	Ω
I_D ($@T_{mb}$ = 25°C)	88⑥	A





PQFN 5X6 mm

Applications

- Secondary Side Synchronous Rectification
- Inverters for DC Motors
- DC-DC Brick Applications
- Boost Converters

Features		Benefits
Low R_{DSon} (≤9.0mΩ)		Lower Conduction Losses
Low Thermal Resistance to PCB (≤ 0.8°C/W)		Enable better thermal dissipation
100% Rg tested		Increased Reliability
Low Profile (≤ 0.9 mm)	results in	Increased Power Density
Industry-Standard Pinout	⇒	Multi-Vendor Compatibility
Compatible with Existing Surface Mount Techniques		Easier Manufacturing
RoHS Compliant Containing no Lead, no Bromide and no Halogen		Environmentally Friendlier
MSL1, Industrial Qualification		Increased Reliability

Base Part Number	Package Type	Standard Pack		Orderable part number
		Form	Quantity	
IRLH5030PBF	PQFN 5mm x 6mm	Tape and Reel	4000	IRLH5030TRPBF

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{GS}	Gate-to-Source Voltage	±16	V
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 10V	13	A
I_D @ T_A = 70°C	Continuous Drain Current, V_{GS} @ 10V	11	
I_D @ T_{mb} = 25°C	Continuous Drain Current, V_{GS} @ 10V	88⑥	
I_D @ T_{mb} = 100°C	Continuous Drain Current, V_{GS} @ 10V	56⑥	
I_{DM}	Pulsed Drain Current ①	400	
P_D @T_A = 25°C	Power Dissipation ⑤	3.6	W
P_D @ T_{mb} = 25°C	Power Dissipation ⑤	156	
	Linear Derating Factor ⑤	0.029	W/°C
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 150	°C

Notes ① through ⑥ are on page 8

 © 2013 International Rectifier

Static @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	100	—	—	V	V_{GS} = 0V, I_D = 250µA
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.10	—	V/°C	Reference to 25°C, I_D = 1mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	7.2	9.0	mΩ	V_{GS} = 10V, I_D = 50A ③
		—	7.9	9.9		V_{GS} = 4.5V, I_D = 50A ③
$V_{GS(th)}$	Gate Threshold Voltage	1.0	—	2.5	V	V_{DS} = V_{GS}, I_D = 150µA
$\Delta V_{GS(th)}$	Gate Threshold Voltage Coefficient	—	-5.9	—	mV/°C	
I_{DSS}	Drain-to-Source Leakage Current	—	—	20	µA	V_{DS} = 100V, V_{GS} = 0V
		—	—	250		V_{DS} = 100V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	V_{GS} = 16V
	Gate-to-Source Reverse Leakage	—	—	-100		V_{GS} = -16V
gfs	Forward Transconductance	160	—	—	S	V_{DS} = 50V, I_D = 50A
Q_g	Total Gate Charge	—	94	—	nC	V_{GS} = 10V, V_{DS} = 50V, I_D = 50A
Q_g	Total Gate Charge	—	44	66	nC	V_{DS} = 50V V_{GS} = 4.5V I_D = 50A See Fig.17 & 18
Q_{gs1}	Pre-Vth Gate-to-Source Charge	—	7.7	—		
Q_{gs2}	Post-Vth Gate-to-Source Charge	—	4.0	—		
Q_{gd}	Gate-to-Drain Charge	—	22	—		
Q_{godr}	Gate Charge Overdrive	—	10.3	—		
Q_{sw}	Switch Charge (Q_{gs2} + Q_{gd})	—	26	—		
Q_{oss}	Output Charge	—	20	—	nC	V_{DS} = 16V, V_{GS} = 0V
R_G	Gate Resistance	—	1.2	—	Ω	
$t_{d(on)}$	Turn-On Delay Time	—	21	—	ns	V_{DD} = 50V, V_{GS} = 4.5V I_D = 50A R_G=1.8Ω See Fig.15
t_r	Rise Time	—	72	—		
$t_{d(off)}$	Turn-Off Delay Time	—	41	—		
t_f	Fall Time	—	41	—		
C_{iss}	Input Capacitance	—	5185	—	pF	V_{GS} = 0V V_{DS} = 50V f = 1.0MHz
C_{oss}	Output Capacitance	—	300	—		
C_{rss}	Reverse Transfer Capacitance	—	150	—		

Avalanche Characteristics

	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy ②	—	230	mJ
I_{AR}	Avalanche Current ①	—	50	A

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	100	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	400		
V_{SD}	Diode Forward Voltage	—	—	1.0	V	T_J = 25°C, I_S = 50A, V_{GS} = 0V ③
t_{rr}	Reverse Recovery Time	—	32	48	ns	T_J = 25°C, I_F = 50A, V_{DD} = 50V
Q_{rr}	Reverse Recovery Charge	—	190	285	nC	di/dt = 500A/µs ③
t_{on}	Forward Turn-On Time	Time is dominated by parasitic Inductance				

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC\text{-}mb}$	Junction-to-Mounting Base	0.5	0.8	°C/W
$R_{\theta JC}$ (Top)	Junction-to-Case ④	–––	15	
$R_{\theta JA}$	Junction-to-Ambient ⑤	–––	35	
$R_{\theta JA}$ (<10s)	Junction-to-Ambient ⑤	–––	33	

 © 2013 International Rectifier

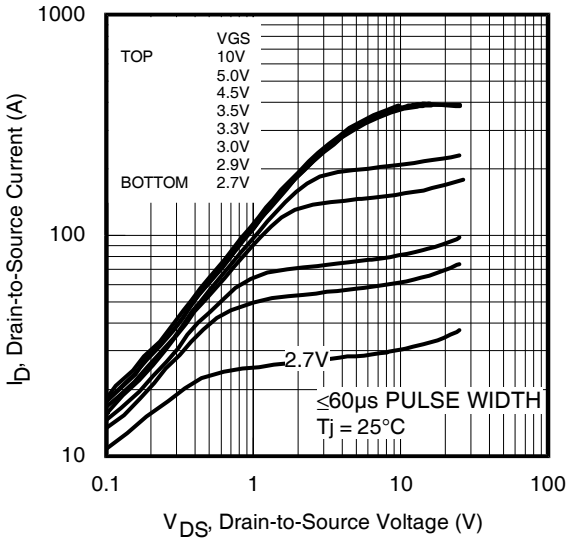


Fig 1. Typical Output Characteristics

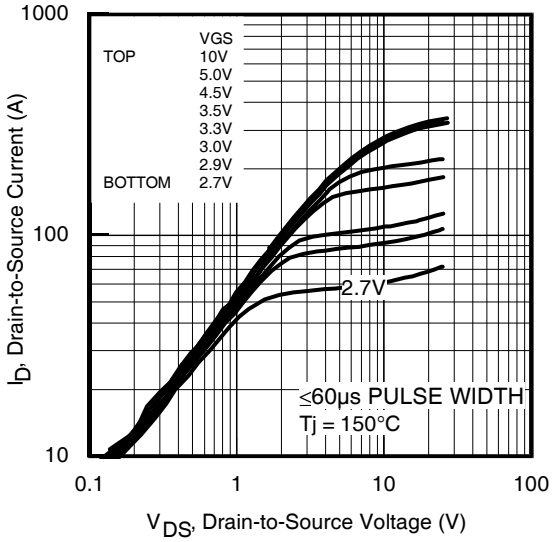


Fig 2. Typical Output Characteristics

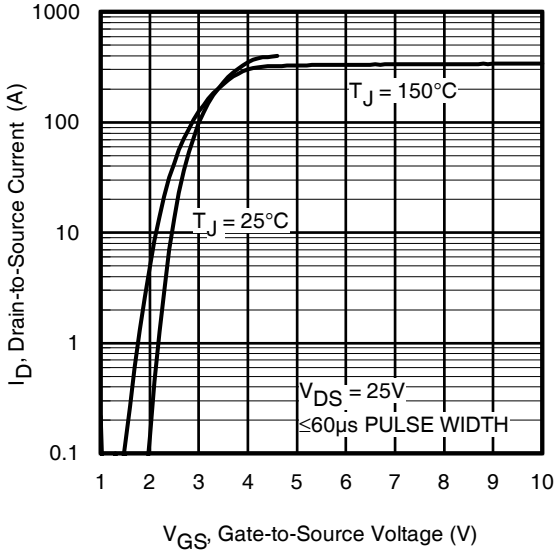


Fig 3. Typical Transfer Characteristics

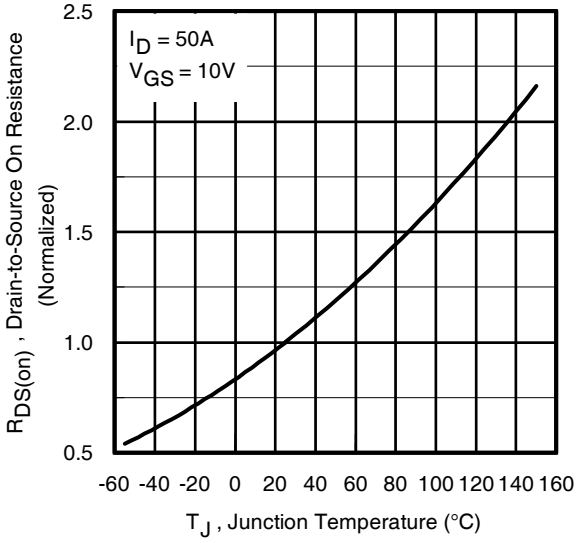


Fig 4. Normalized On-Resistance vs. Temperature

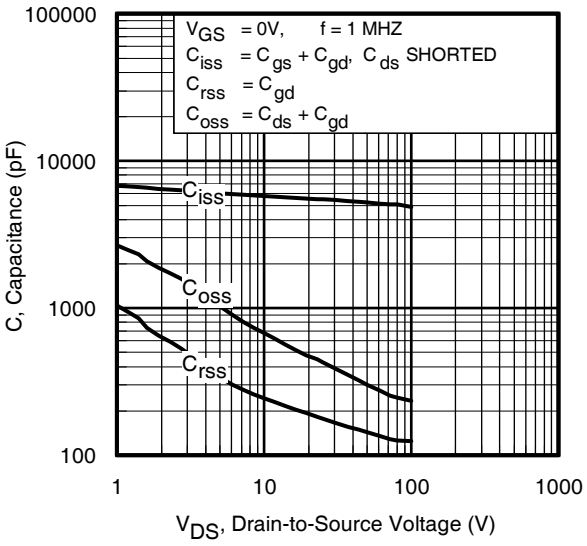


Fig 5. Typical Capacitance vs.Drain-to-Source Voltage

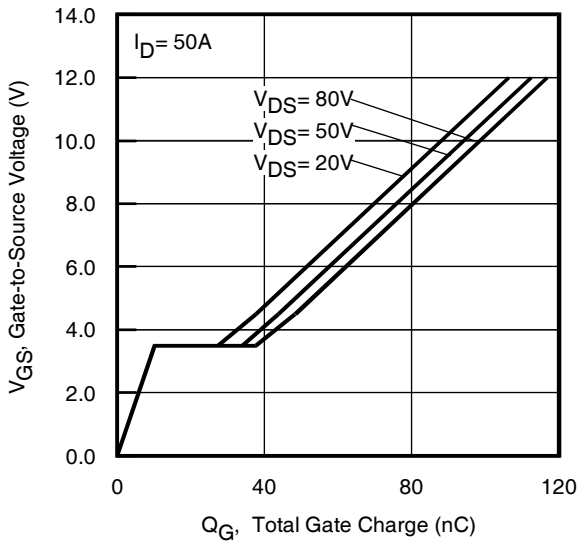


Fig 6. Typical Gate Charge vs.Gate-to-Source Voltage

 © 2013 International Rectifier

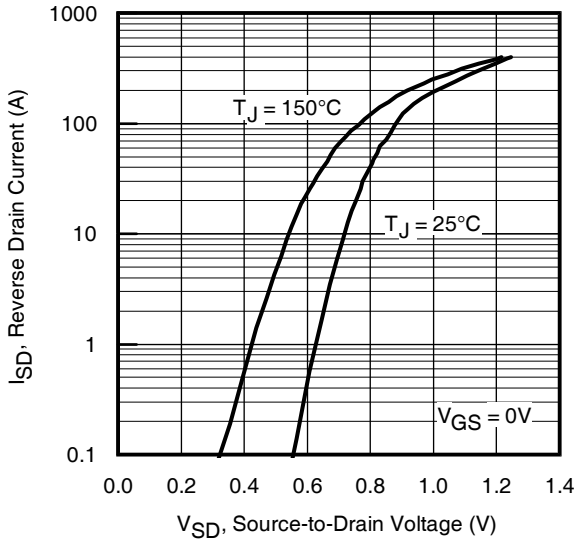


Fig 7. Typical Source-Drain Diode Forward Voltage

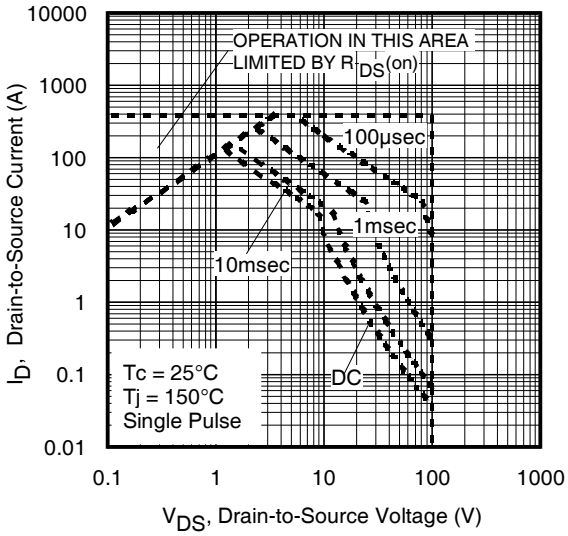


Fig 8. Maximum Safe Operating Area

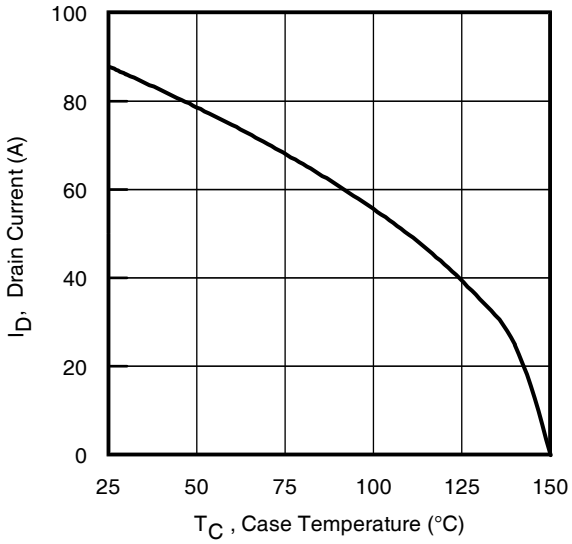


Fig 9. Maximum Drain Current vs. Case Temperature

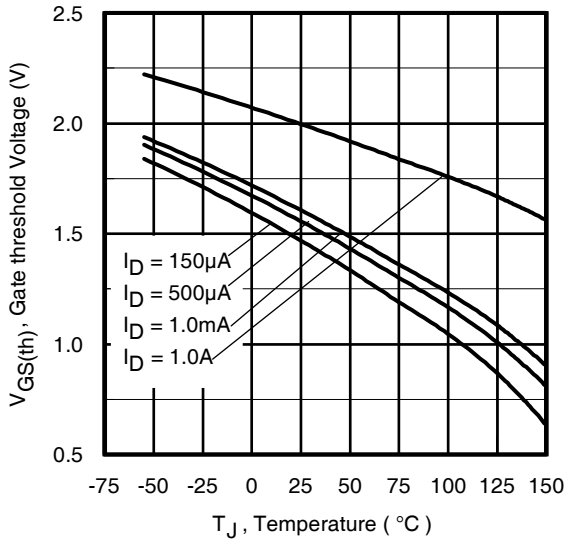


Fig 10. Threshold Voltage vs. Temperature

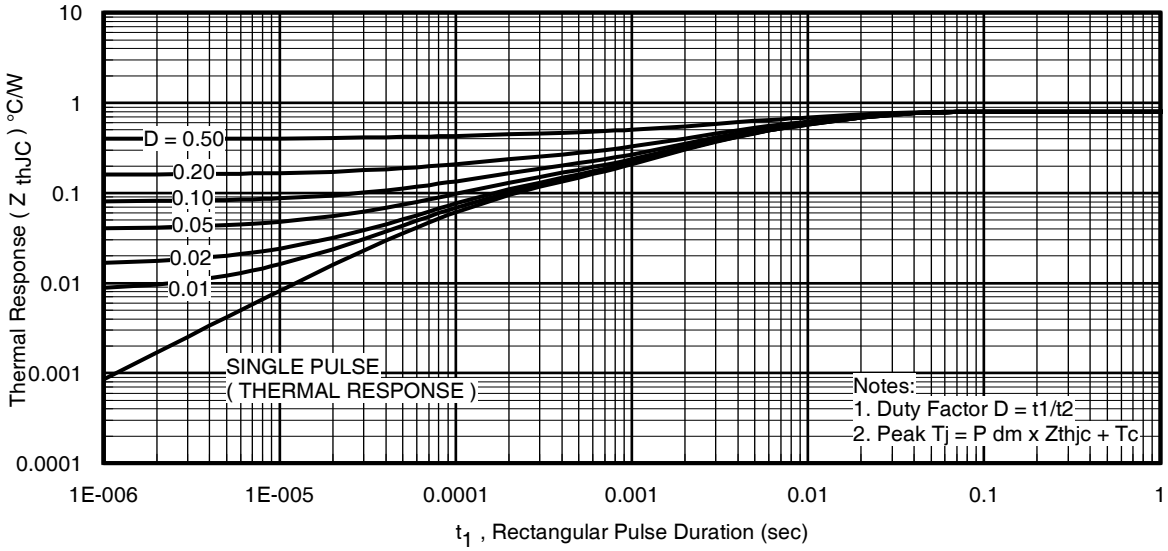


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Mounting Base

 © 2013 International Rectifier

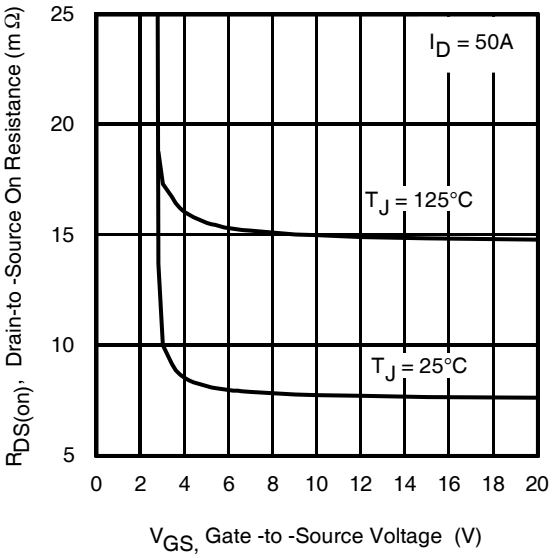


Fig 12. On-Resistance vs. Gate Voltage

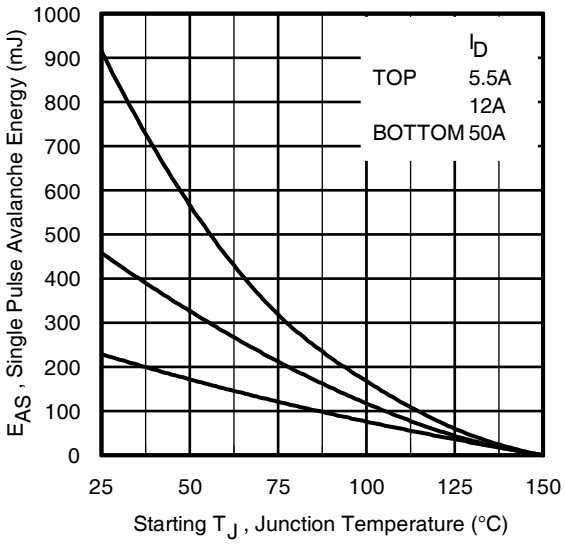


Fig 13. Maximum Avalanche Energy vs. Drain Current

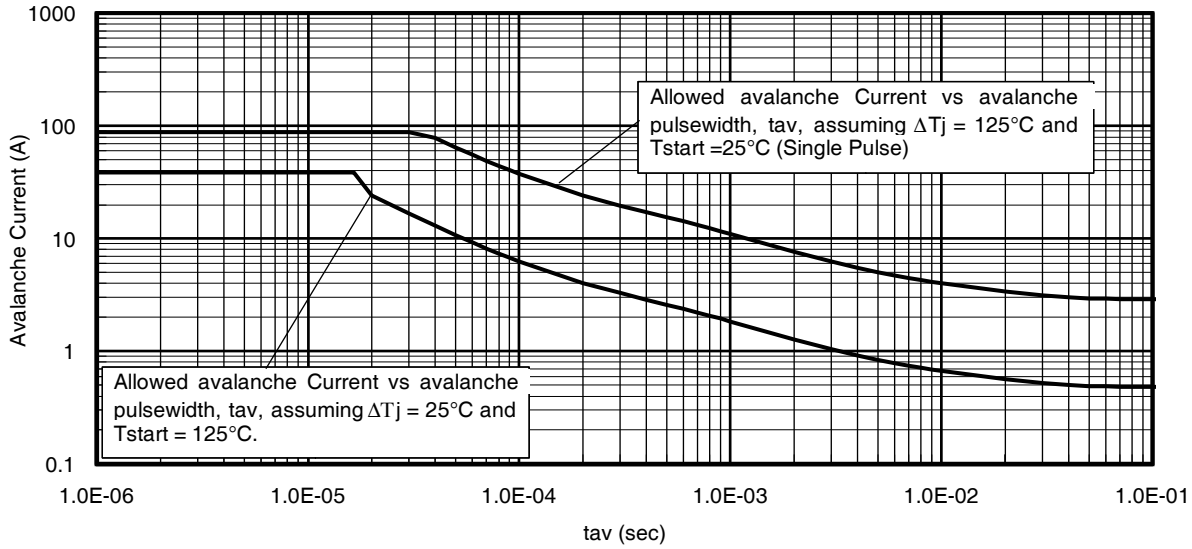


Fig 14. Typical Avalanche Current vs. Pulsewidth

 © 2013 International Rectifier

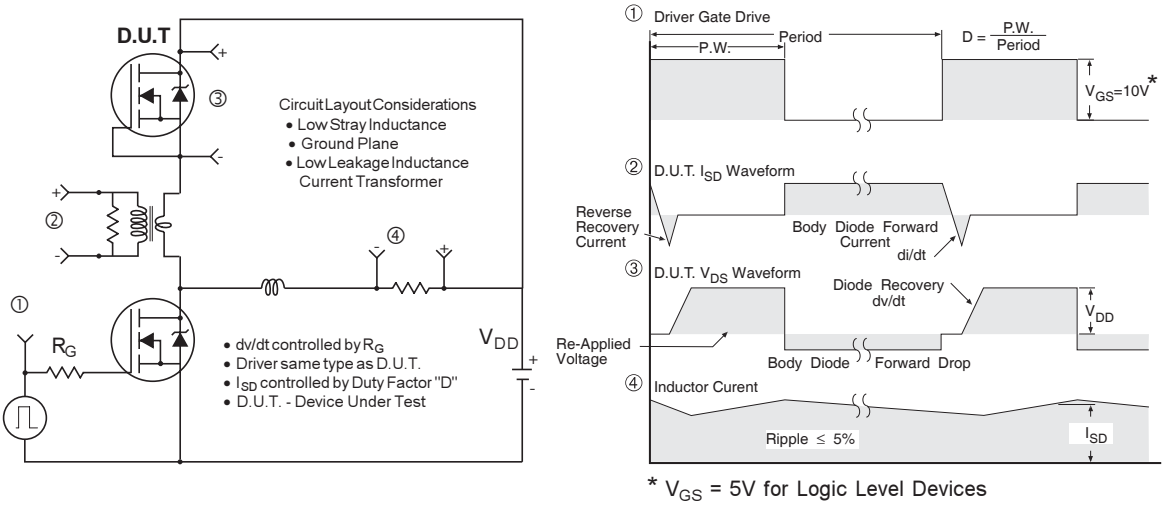


Fig 15. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

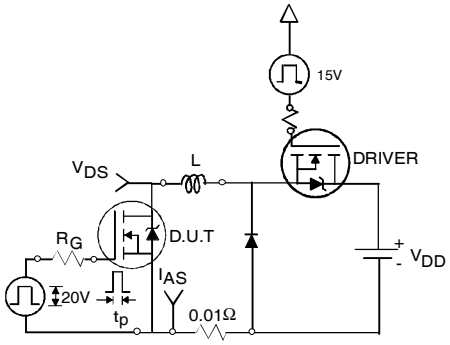


Fig 16a. Unclamped Inductive Test Circuit

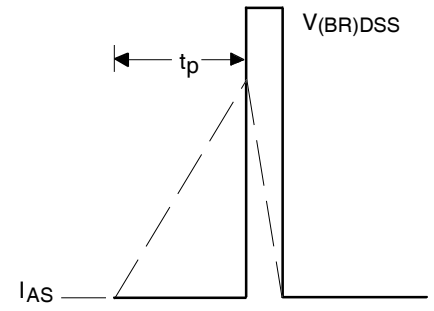


Fig 16b. Unclamped Inductive Waveforms

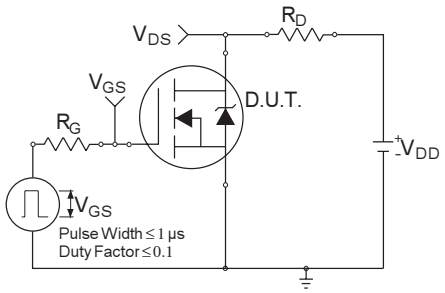


Fig 17a. Switching Time Test Circuit

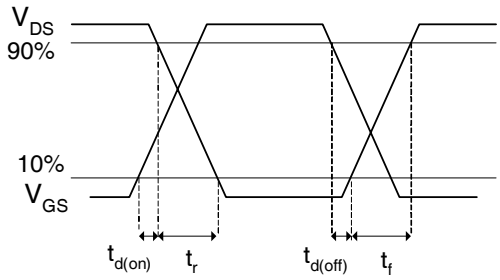


Fig 17b. Switching Time Waveforms

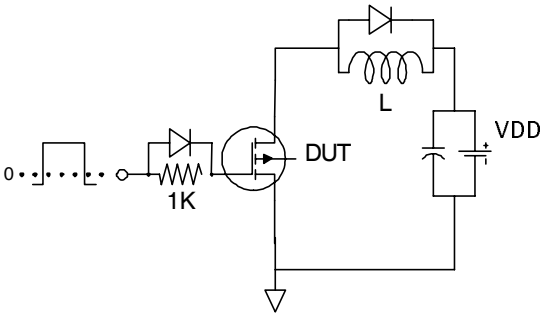


Fig 18a. Gate Charge Test Circuit


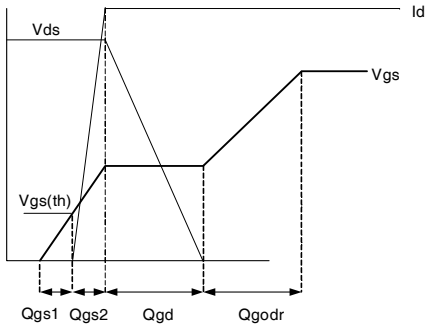



Fig 18b. Gate Charge Waveform

 © 2013 International Rectifier

PQFN 5x6 Outline "B" Package Details




SIDE VIEW

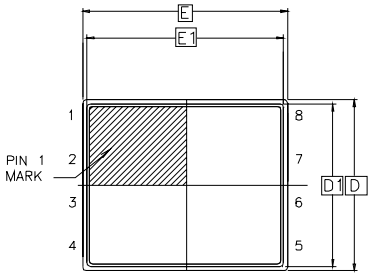

TOP VIEW


DIM / SYMBOL	MIN	NOM	MAX
A	0.800	0.830	1.05
A1	0.000	0.020	0.050
A2	0.580	0.630	0.680
A3		0.254 REF	
Θ	0°	10°	12°
b	0.350	0.400	0.470
D	4.850	5.000	5.150
D1	4.675	4.750	5.000
D2	3.700	4.210	4.300
e		1.270 BSC	
E	5.850	6.000	6.150
E1	5.675	5.750	6.000
E2	3.380	3.480	3.760
E4	2.480	2.580	2.680
L	0.550	0.800	0.900
R		0.200 REF	
R1		0.100 REF	
R2	0.150	0.200	0.250

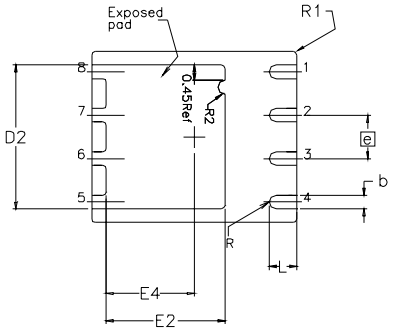

BOTTOM VIEW

For more information on board mounting, including footprint and stencil recommendation, please refer to application note AN-1136:
http://www.irf.com/technical-info/appnotes/an-1136.pdf
For more information on package inspection techniques, please refer to application note AN-1154:
http://www.irf.com/technical-info/appnotes/an-1154.pdf


PQFN 5x6 Outline "B" Part Marking

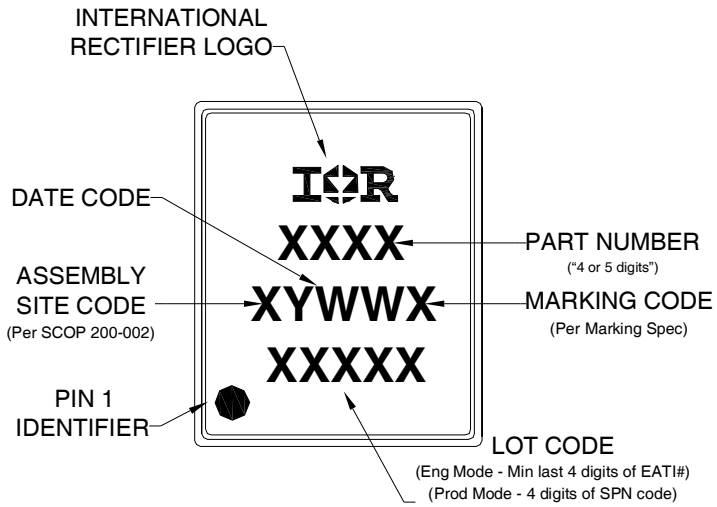

Note: For the most current drawing please refer to IR website at: http://www.irf.com/package/

 © 2013 International Rectifier

PQFN 5x6 Outline "B" Tape and Reel

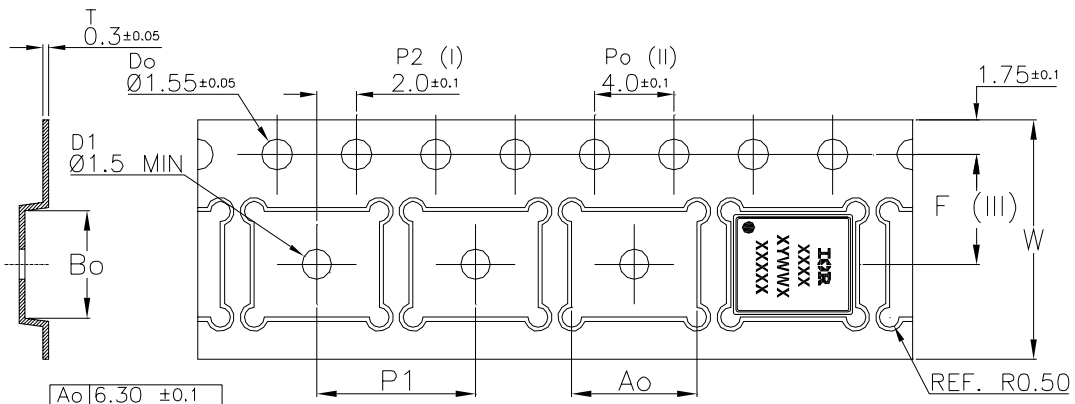

Ao	6.30 ±0.1
Bo	5.30 ±0.1
F	5.50 ±0.1
P1	8.00 ±0.1
W	12.00 ±0.3

Qualification information†

Qualification level	Industrial†† (per JEDEC JESD47F ††† guidelines)	
Moisture Sensitivity Level	PQFN 5mm x 6mm	MSL1 (per JEDEC J-STD-020D†††)
RoHS compliant	Yes	

† Qualification standards can be found at International Rectifier's web site http://www.irf.com/product-info/reliability

†† Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information: http://www.irf.com/whoto-call/salesrep/

††† Applicable version of JEDEC standard at the time of product release.

Notes:

① Repetitive rating; pulse width limited by max. junction temperature.

② Starting T_J = 25°C, L = 0.18mH, R_G = 25Ω, I_{AS} = 50A.

③ Pulse width ≤ 400µs; duty cycle ≤ 2%.

④ R_θ is measured at T_J of approximately 90°C.

⑤ When mounted on 1 inch square 2 oz copper pad on 1.5x1.5 in. board of FR-4 material.

⑥ Calculated continuous current based on maximum allowable junction temperature.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 101 N. Sepulveda Blvd., El Segundo, California 90245, USA
To contact International Rectifier, please visit http://www.irf.com/whoto-call/

 © 2013 International Rectifier