

DESCRIPTION


MO31 Series are orange LED lamp with 3mm diameter epoxy package.

MO31C is orange chip with orange transparent lens.

MO31D is orange chip with orange diffused lens.

MO31T is orange chip with clear transparent lens.

MG31W is orange chip with clear diffused lens.

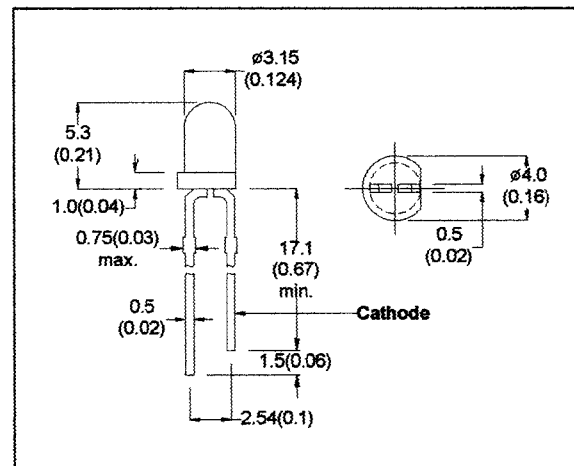

- All Dimension in mm (inch)
- No Scale
- Tol : + / - 0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @Ta=25°C

Forward Current, DC (IF)

Reverse Voltage

Operating & Storage Temperature Range

Lead Soldering Temperature (1/16" from body)

90mW

30mA

5V

-55 to +100°C

260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MO31C	MO31D	MO31T	MO31W	UNIT	CONDITIONS
Forward Voltage	MAX VF	3.0	3.0	3.0	3.0	V	IF=20mA
Reverse Breakdown Voltage	MIN BVR	5	5	5	5	V	IR=100 μ A
Luminous Intensity	MIN IV	45	10	45	10	mcd	IF=20mA
	TYP	60	15	60	15	mcd	
Peak Wavelength	TYP λ_p	630	630	630	630	nm	IF=20mA
Spectral Line Half Width	TYP $\Delta\lambda$	40	40	40	40	nm	IF=20mA
Viewing Angle	TYP 2θ 1/2	40	60	40	60	degree	IF=20mA

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Aug-99