


## Professional Microphone Cable - XL

**MC2000**

- ▶ very low capacitance ( 60 pF/m )
- ▶ extremely flexible
- ▶ extra heavy overall sheath

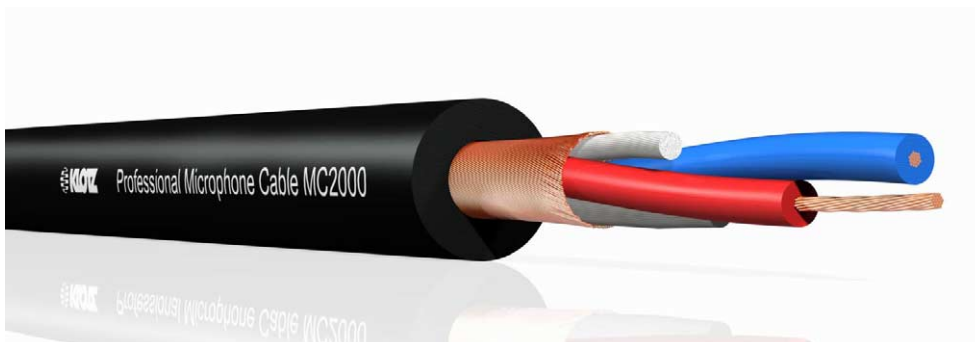

### ▶ construction

|                         |                                                    |
|-------------------------|----------------------------------------------------|
| Order No.               | <b>MC2000SW /-RT /-BL</b>                          |
| Conductor               | 28 x 0.10 mm Ø bare copper                         |
| Conductor Cross Section | 0.22 mm <sup>2</sup>                               |
| Insulation              | PE                                                 |
| Core Arrangement        | 2 cores + cotton tracers twisted                   |
| Shielding               | bare copper spiral shield                          |
| Jacket                  | PVC lead free, matt<br>colors: black, red and blue |
| Outer Diameter          | 6.5 mm                                             |

### ▶ mechanic

|                     |                 |
|---------------------|-----------------|
| Weight              | 50 g/m          |
| Working Temperature | -25 °C / +70 °C |
| Min. Bending Radius | 30 mm           |
| Max. Reel Length    | 100 m / 1000 m  |

### ▶ electric

|                        |               |
|------------------------|---------------|
| Conductor Resistance   | < 85 Ω / km   |
| Capacitance            |               |
| Cond./Cond.            | 60 pF / m     |
| Cond./Screen           | 110 pF / m    |
| Max. Operating Voltage | 250 V         |
| Insulation Resistance  | > 100 MΩ x km |