Pushing Performance

# Han-Yellock 60 bulkhead housing

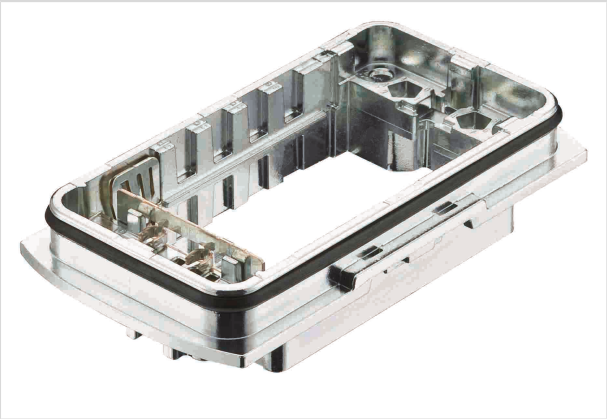


Image is for illustration purposes only. Please refer to product description.

| | |
|---|---|
| Part number | 11 12 600 0301 |
| Specification | Han-Yellock 60 bulkhead housing |
| HARTING eCatalogue | https://b2b.harting.com/11126000301 |

## Identification

| | |
|---|---|
| Category | Hoods/Housings |
| Series of hoods/housings | Han-Yellock® |
| Type of hood/housing | Bulkhead mounted housing |

## Version

| | |
|---|---|
| Size | Han-Yellock® 60 |
| Field of application | Hoods/housings for industrial applications |

## Technical characteristics

| | |
|---|---|
| Limiting temperature | -40 ... +125 °C |
| Un-/locking temperature | -10 ... +85 °C |
| Degree of protection acc. to IEC 60529 | IP65<br>IP67 |

## Material properties

| | |
|---|---|
| Material (hood/housing) | Zinc die-cast |
| Surface (hood/housing) | Passivated |
| Colour (hood/housing) | Metallic |
| Material (seal) | NBR |
| Material flammability class acc. to UL 94 | V-0 |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |


HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com

Pushing Performance

## Material properties

| | |
|---|---|
| REACH Annex XVII substances | No |
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | No |

## Specifications and approvals

| | |
|---|---|
| Specifications | EN 60664-1<br>IEC 61984 |
| Approvals | DNV GL |
| CE | Yes |

## Commercial data

| | |
|---|---|
| Packaging size | 1 |
| Net weight | 149 g |
| Country of origin | Germany |
| European customs tariff number | 85389099 |
| eCl@ss | 27440202 Shell for industrial connectors |


HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com