


Features


- WiFi/ZigBee/Bluetooth
- Chip Type
- Stable And Reliable Performance
- 2400-2500MHz
- SMT Process Compatible

Applications

- ISM 2.4 GHz Applications
- ZigBee/BLE Applications
- Bluetooth Earphone Systems
- Smart Hand Held Devices
- Machine To Machine Communication



Part Numbering Guide


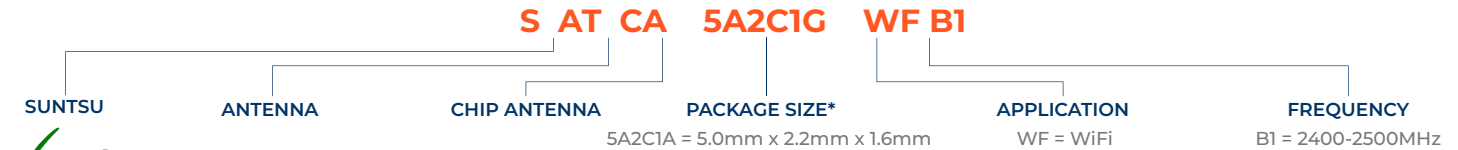


* Where letters denote decimal location (A=0, B=1, C=2, etc.); e.g. B5=0.15, 3A5=3.05, 9A=9.0

Electrical Parameters	Units	Minimum	Typical	Maximum	Remarks
Frequency Band	MHz	2400		2500	
Impedance	Ω		50		
Polarization			Linear		
Peak Gain	dBi		2.2		At 2442MHz
Efficiency	%		66		At 2442MHz
VSWR				2	At Center Frequency
Operating Temperature	C	-40		85	



Outline Drawing

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

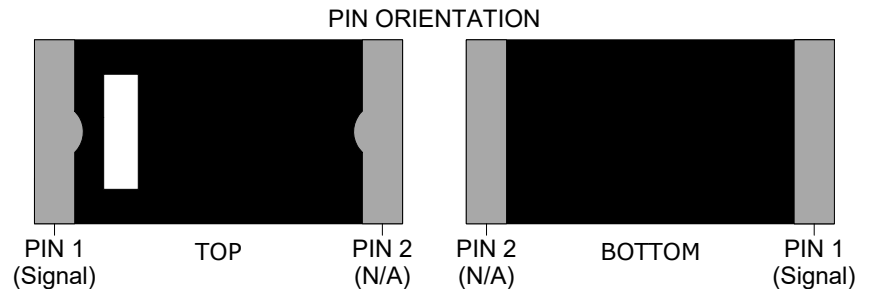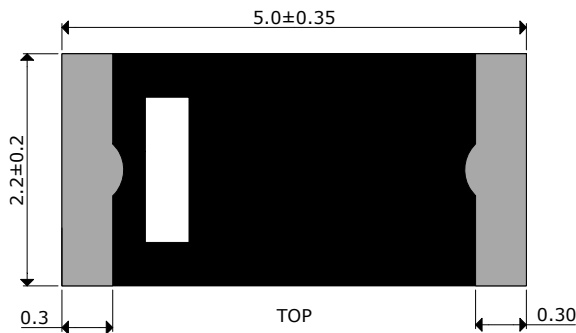

Recommended Land Pattern & Frequency Tuning Scenario Circuit

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

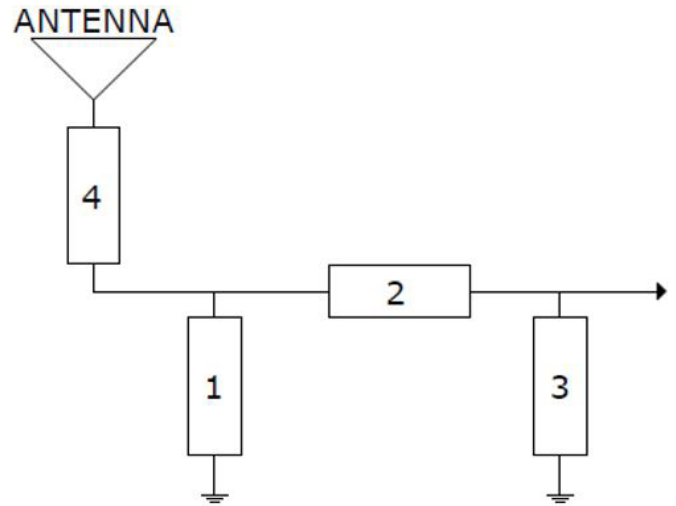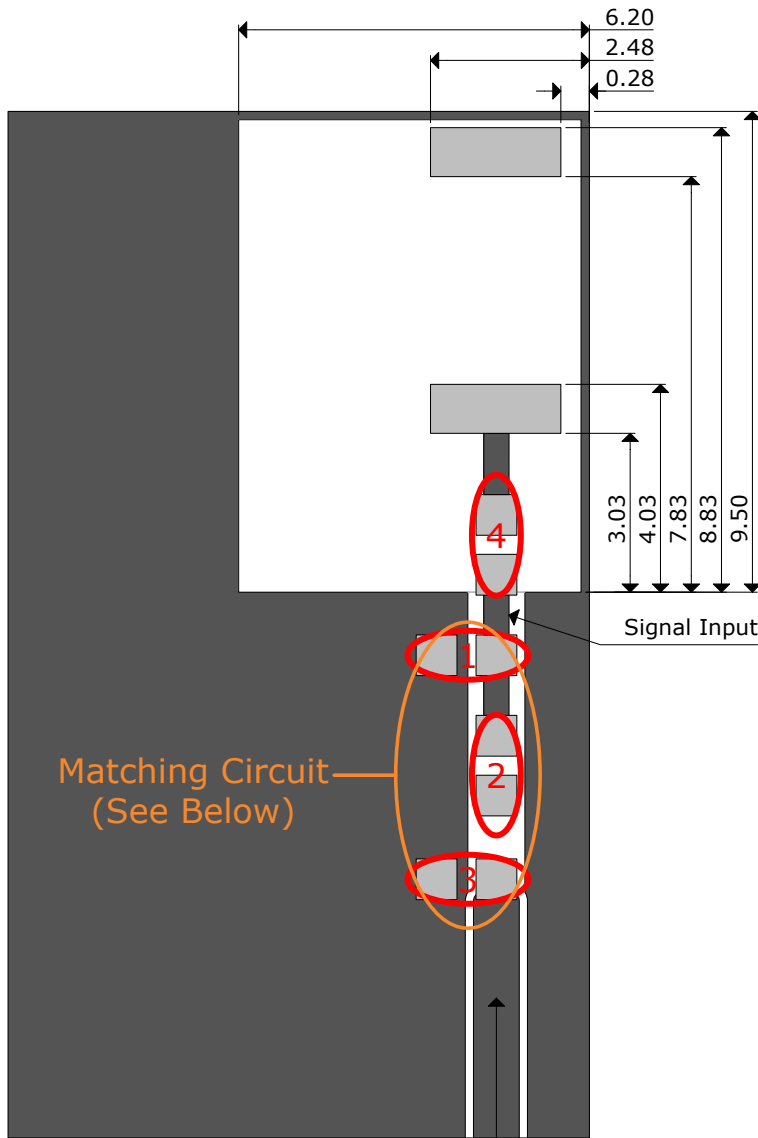





For these suggested values for the matching and tuning of components, the average frequency will be 2442MHz on a standard 40 x 40mm² Evaluation board.

Please note, these are average reference values which may need to be changed when different circuit boards or W are used.

Transmission Line With 50Ω Impedance Characteristics

System Matching Circuit Components


Location	Description	Vendor	Tolerance
1	N/A	-	-
2	2.2nH, (0402)	DARFON	±0.1nH
3	1pF, (0402)	DARFON	±0.1pF
4 (Fine Tuning)	0Ω, (0402)	-	-

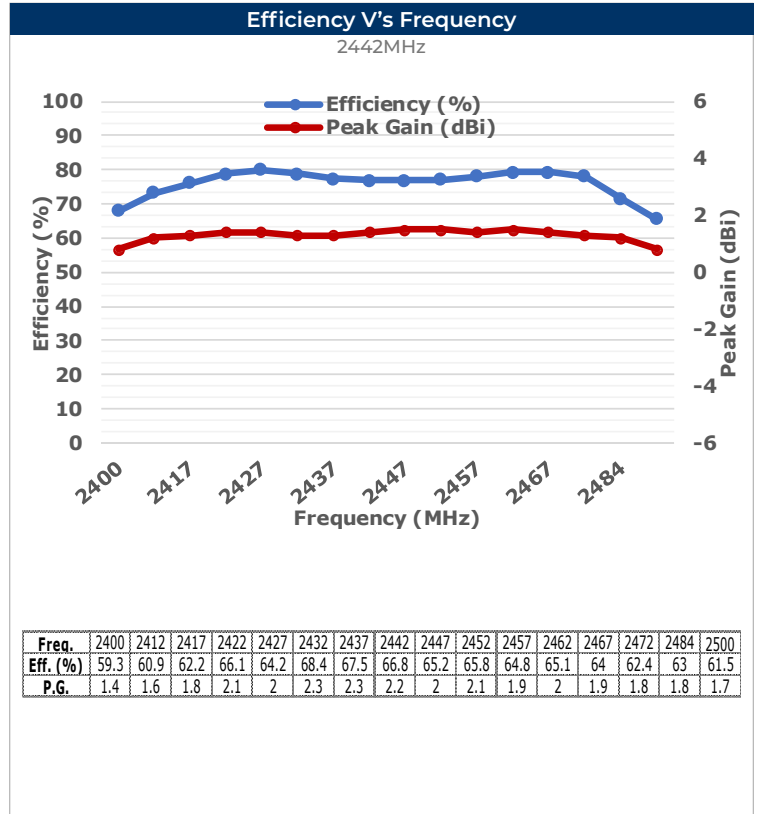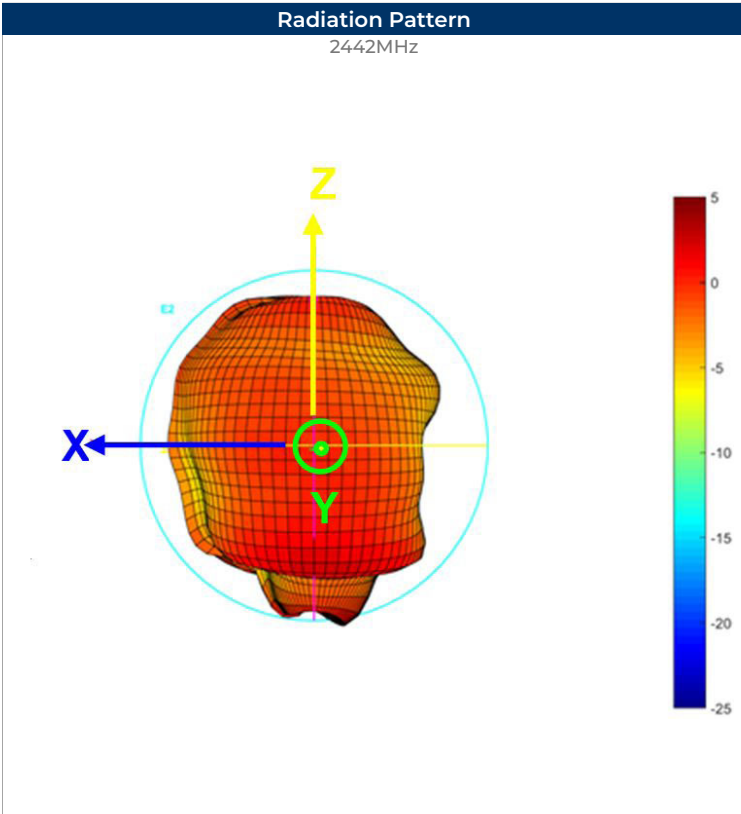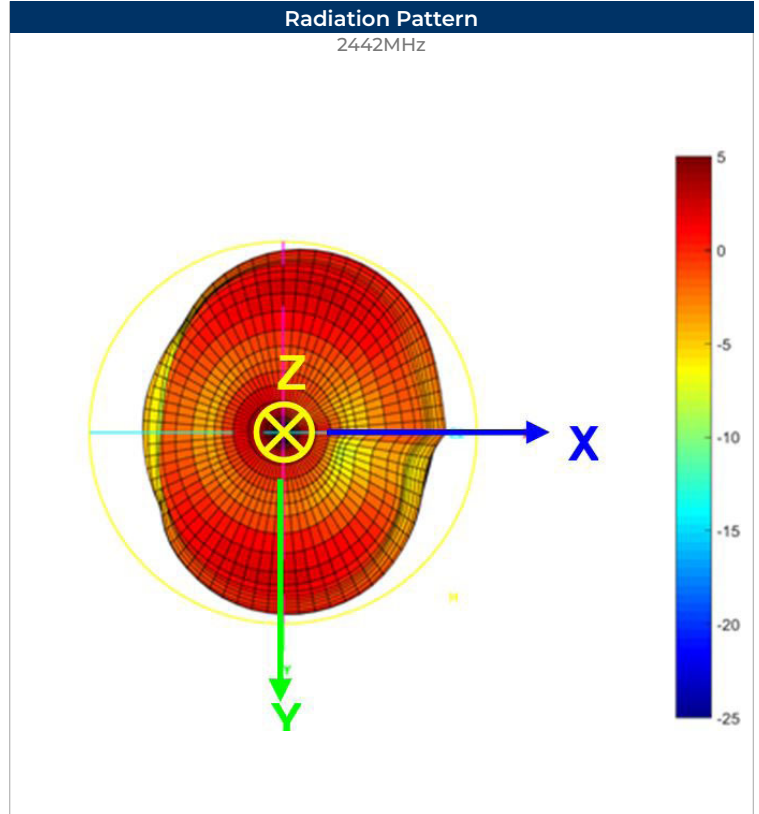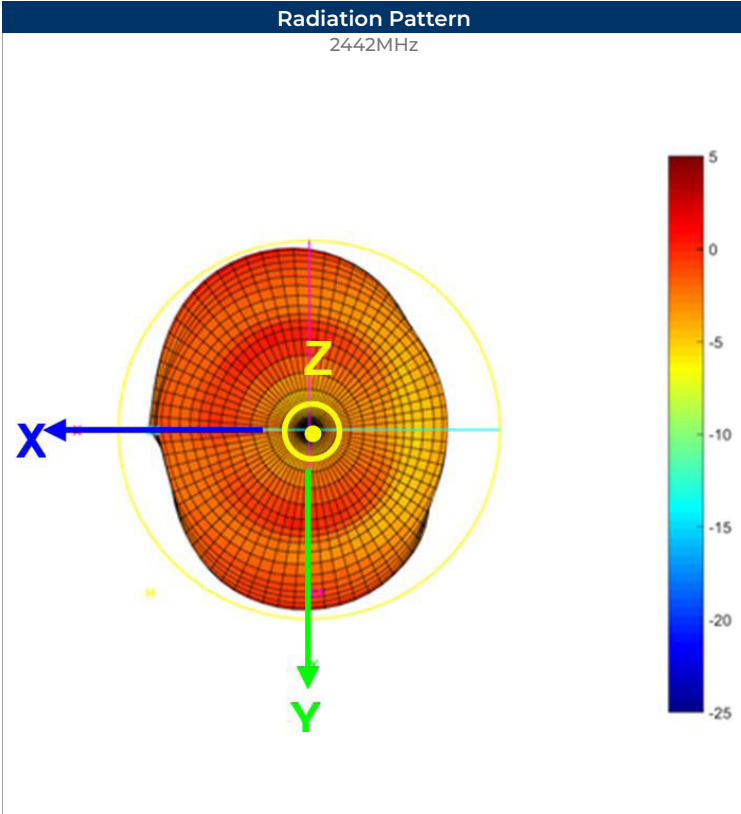

Electrical Test

Return Loss


[F2] S22 Log Mag 10.00dB/ Ref 0.000dB [F2]

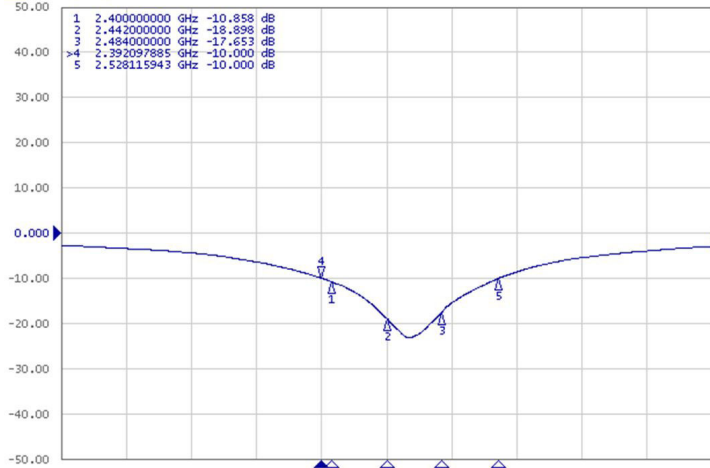

Electrical Test


VSWR

[F2] S22 SWR 1.000/ Ref 1.000 [F2]

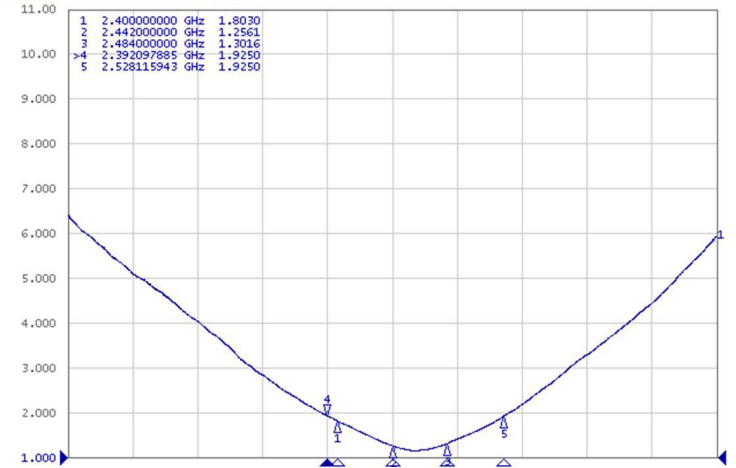


Soldering Conditions

Typical Soldering Profile For Lead-Free Process

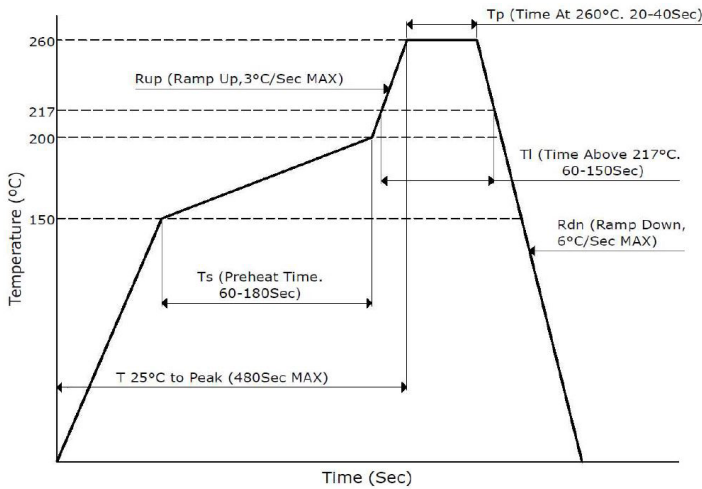

Packaging - Tape And Reel

3000Pcs / Reel

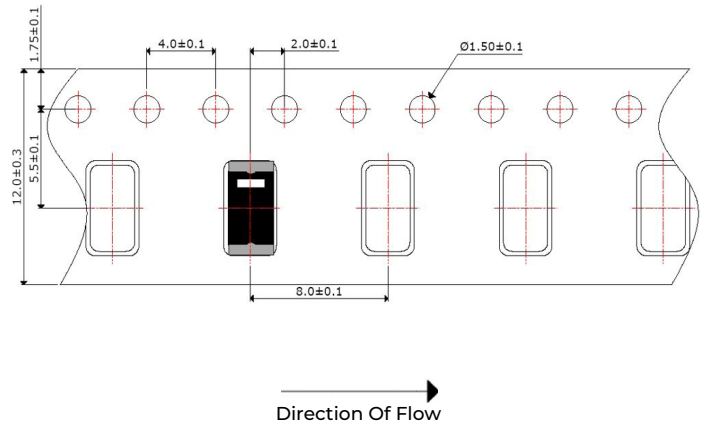

Environmental & Mechanical Specifications

High Temperature Test	85°C for 500 hours, and then to normal temperature/humidity for 24hours.
Low Temperature Test	-30°C for 500 hours, and then to normal temperature/humidity for 24hours.
Humidity Test	85°C / 90-95%RH for 96 hours, and then to normal temperature/humidity for 24hours.
Thermal Shock Test	-30°C for 30 min and +85°C for 30 min. 5 cycles, then expose to normal temperature/humidity for 24 hours or more.
Vibration Test	5 to 200 to 5Hz, swept in 10min, 4.5G at max(2mm amplitude), in X and Y directions for 2 hours each and in Z direction for 4 hours.