
HiRel NPN Silicon RF Transistor

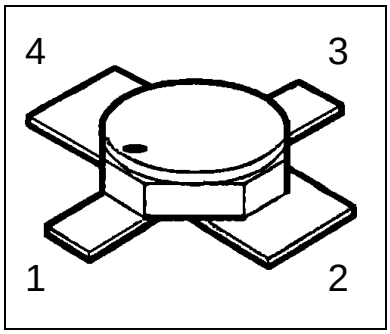

- ***HiRel* Discrete and Microwave Semiconductor**
- For low noise, high-gain broadband amplifiers at collector currents from 1 mA to 20 mA.
- Hermetically sealed microwave package
- f_T= 8 GHz
  F = 2.4 dB at 2 GHz
- **esa Space Qualified**
  ESA/SCC Detail Spec. No.: 5611/006
  Type Variant No. 04

ESD: **E**lectro**s**tatic **d**ischarge sensitive device,
observe handling precautions!

Type	Marking	Ordering Code	Pin Configuration				Package
BFY182 (ql)	-	see below	C	E	B	E	Micro-X1

(ql) Quality Level:	P: Professional Quality,	Ordering Code:	Q62702F1608
	H: High Rel Quality,	Ordering Code:	on request
	S: Space Quality,	Ordering Code:	on request
	ES: ESA Space Quality,	Ordering Code:	Q62702F1714

(see order instructions for ordering example)

Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-emitter voltage	V_{CEO}	12	V
Collector-emitter voltage, V_{BE}=0	V_{CES}	20	V
Collector-base voltage	V_{CBO}	20	V
Emitter-base voltage	V_{EBO}	2	V
Collector current	I_C	35	mA
Base current	I_B	4 [1)]	mA
Total power dissipation, $T_S \leq 136°C$ [2), 3.)]	P_{tot}	250	mW
Junction temperature	T_j	200	°C
Operating temperature range	T_{op}	-65...+200	°C
Storage temperature range	T_{stg}	-65...+200	°C

Thermal Resistance

Junction-soldering point [3.)]	$R_{th\ JS}$	< 255	K/W

Notes.:

1) The maximum permissible base current for V_{FBE} measurements is 20mA (spot-measurement duration < 1s)

2) At T_S = + 136 °C. For T_S > + 136 °C derating is required.

3) T_S is measured on the collector lead at the soldering point to the pcb.

Electrical Characteristics

at T_A=25°C; unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-base cutoff current V_{CB} = 20 V, I_E = 0	I_{CBO}	-	-	100	µA
Collector-emitter cutoff current V_{CE} = 12 V, I_B = 0.2µA [1.)]	I_{CEX}	-	-	200	µA
Collector-base cutoff current V_{CB} = 10 V, I_E = 0	I_{CBO}	-	-	50	nA
Emitter base cuttoff current V_{EB} = 2 V, I_C = 0	I_{EBO}	-	-	25	µA
Emitter base cuttoff current V_{EB} = 1 V, I_C = 0	I_{EBO}	-	-	0.5	µA

Notes:

1.) This Test assures $V(BR)_{CE0}$ > 12V

Electrical Characteristics (continued)

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Base-Emitter forward voltage I_E = 20 mA, I_C = 0	V_{FBE}	-	-	1	V
DC current gain I_C = 5 mA, V_{CE} = 6 V	h_{FE}	55	100	170	-
AC Characteristics					
Transition frequency I_C = 15 mA, V_{CE} = 5 V, f = 500 MHz I_C = 15 mA, V_{CE} = 8 V, f = 500 MHz	f_T	 6.5 -	 7.5 8	 - -	GHz
Collector-base capacitance V_{CB} = 10 V, V_{BE} = vbe = 0, f = 1 MHz	C_{CB}	-	0.26	0.36	pF
Collector-emitter capacitance V_{CE} = 10 V, V_{BE} = vbe = 0, f = 1 MHz	C_{CE}	-	0.34	-	pF
Emitter-base capacitance V_{EB} = 0.5V, V_{CB} = vcb = 0, f = 1 MHz	C_{EB}	-	0.8	1.1	pF
Noise Figure I_C = 5 mA, V_{CE} = 5 V, f = 2 GHz, $Z_S = Z_{Sopt}$	F	-	2.4	2.9	dB
Power gain I_C = 15 mA, V_{CE} = 5V, f = 2 GHz $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$	Gma [1.)]	13.5	14.5	-	dB
Transducer gain I_C = 15 mA, V_{CE} = 5 V, f = 2 GHz $Z_S = Z_L$ = 50 Ω	$\|S_{21e}\|^2$	10	11	-	dB

Notes.:

1) $G_{ma} = \left|\frac{S21}{S12}\right|(k - \sqrt{k^2 - 1})$, $G_{ms} = \left|\frac{S21}{S12}\right|$

Order Instructions:

Full type variant including quality level must be specified by the orderer. For *HiRel* Discrete and Microwave Semiconductors the ordering code specifies device family and quality level.

Ordering Form:

Ordering Code: Q.....
BFY182 (ql)
(ql): Quality Level

Ordering Example:

Ordering Code: Q62702F1714
BFY182 ES

For BFY182 in ESA Space Quality Level

Further Informations:

See our WWW-Pages:

- Discrete and RF-Semiconductors (Small Signal Semiconductors)

  www.infineon.com/products/discrete/hirel.htm

- *HiRel* Discrete and Microwave Semiconductors


  www.infineon.com/products/discrete/hirel.htm

Please contact also our marketing division :

Tel.: ++89 234 24480
Fax.: ++89 234 28438
e-mail: martin.wimmers@infineon.com

Address: Infineon -Technologies Semiconductors,
High Frequency Products Marketing,
P.O.Box 801709,
D-81617 Munich

Micro-X1 Package

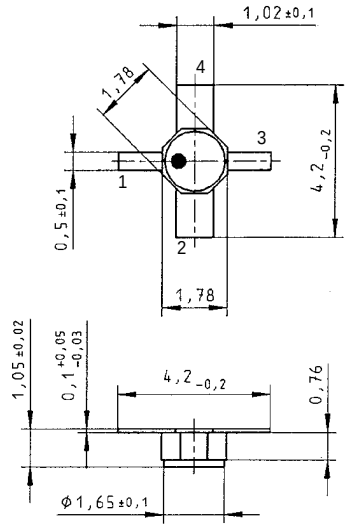

Published by Infineon Technologies Semiconductors, High Frequency Products Marketing, P.O.Box 801709, D-81617 Munich.

Infineon Technologies AG 1998. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, delivery and prices please contact the Offices of Semiconductor Group in Germany or the Infineon Technologies Companies and Representatives woldwide (see address list).

Due to technical requirements components may contain dangerous substances. For information on the type in question please contact your nearest Infineon Technologies Office, Semiconductor Group.

Infineon Technologies Semiconductors is a certified CECC and QS9000 manufacturer (this includes ISO 9000).