


# TaNiSi® 0.025" Lead Pitch High Frequency Resistor Network



## QS001 Series

- Pull up/down resistor
- QSOP package - small footprint
- Parallel transmission line terminator
- High level of integration - replaces 22 discrete resistors
- Center located ground pins improve signal integrity at high frequencies

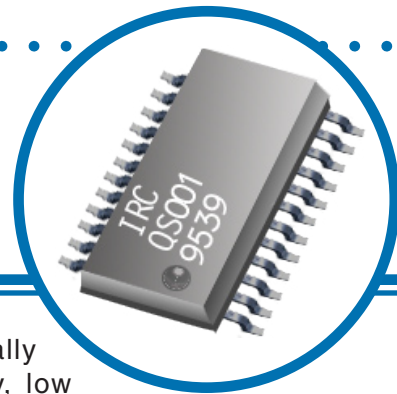


IRC's QS001 series 24 pin QSOP resistor network is specially designed for operation in digital circuits with high frequency, low propagation delay requirements. The device contains 22 TaNiSi® resistor elements which provide rugged, reliable, trouble free operation. The dual, center located common connections provide reduced propagation delay and improved signal integrity over standard bussed schematics.

## Electrical Data

Resistance Range ( $\Omega$ )	Absolute Tolerance (%)	TCR ( $\text{ppm}/^\circ\text{C}$ )	TCR Tracking ( $\text{ppm}/^\circ\text{C}$ )	Operating Temperature Range ( $^\circ\text{C}$ )	Maximum Operating Voltage (volts)	Maximum Resistor Power Dissipation (watts)	Maximum Network Power Dissipation (Watts)
30 - 100	$\pm 5, \pm 10, \pm 20$	$\pm 25, \pm 50, \pm 100$	$\pm 5$	-55 to +125	100V or $\sqrt{\text{PR}}$	0.1	1.0

## Schematic Data

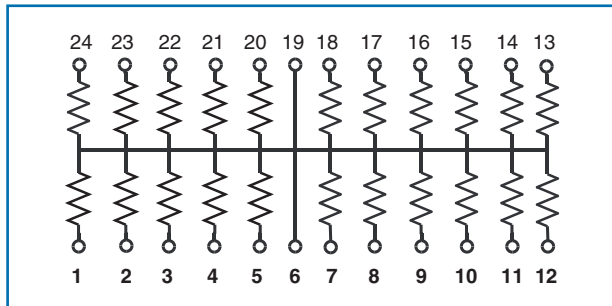

## Ordering Data

Sample Part Number	GUS	-	QS001	-	03	-	56R0	-	K
Family	GUS								
Model	QS001								
24-Pin QSOP									
Temperature Coefficient	03								
01 = $\pm 100$ , 02 = $\pm 50$ , 03 = $\pm 25$									
Resistance	56R0								
Standard MIL resistance code (Example: 1001 = 1000 $\Omega$ , 1003 = 100,000 $\Omega$ )									
Tolerance	K								
J = $\pm 5\%$ , K = $\pm 10\%$ , M = $\pm 20\%$									

### General Note

IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

