


High Impulse Current Gas Discharge Tubes

20KA / 40KA

1: Dimension(mm)

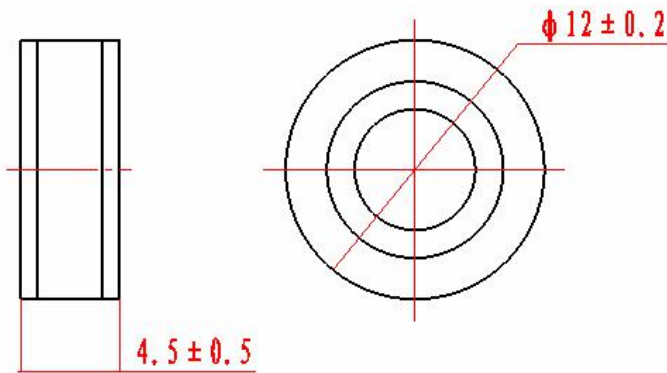

Specification of H2R12S-600H

Nominal Dc spark-over voltage (100V/s)	480V-720V	
impulse spark-over voltage 5KV/ μ s (1.2/50us, 6KV)	<1500V	
Nominal impulse discharge current 8/20 μ s 20 times	20KA	
Maximum nominal impulse discharge current 8/20 μ s 2times	40KA	
TOV behaviour (1200V 1 operation 50HZ 200ms)	<300A	
Follow current behaviour 50/60HZ 260V	100A	
Maximum capacitance (1MHz)	2pF	
Minimum insulation resistance@ 100V	10000M Ω	
Weight	~ 4g	
Operation and storage temperature	-40 $^{\circ}$ C ...+90 $^{\circ}$ C	
Marking, green	2R 600 15	600 - Nominal voltage 15 - Year of production

Specifications are subject to change without notice

sales@huaandz.com