


#### Features

- Schottky Barrier Chip
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- For Use in Low Voltage Application
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V-O

#### Mechanical Data

- Case: TO-220AB, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Mounting Position: Any
- **Lead Free: For RoHS / Lead Free Version**

#### TO-220AB

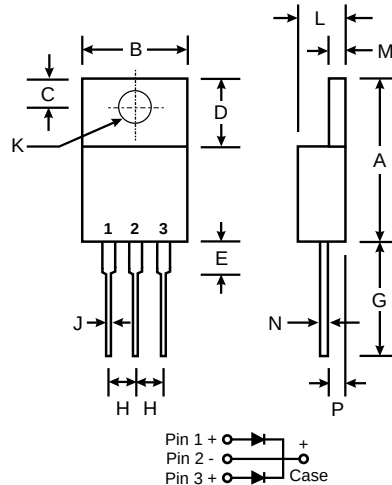

| TO-220AB             |                    |                    |
|----------------------|--------------------|--------------------|
| Dim                  | Min                | Max                |
| A                    | 13.90              | 15.90              |
| B                    | 9.60               | 10.70              |
| C                    | 2.54               | 3.43               |
| D                    | 5.75               | 6.85               |
| E                    | 3.56               | 4.56               |
| G                    | 12.70              | 14.73              |
| H                    | 2.29               | 2.79               |
| J                    | 0.51               | 1.14               |
| K                    | 3.53 $\varnothing$ | 4.09 $\varnothing$ |
| L                    | 3.56               | 4.83               |
| M                    | 1.10               | 1.40               |
| N                    | 0.30               | 0.64               |
| P                    | 2.03               | 2.92               |
| All Dimensions in mm |                    |                    |

#### Maximum Ratings and Electrical Characteristics @T<sub>A</sub>=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| Characteristic                                                                                                     | Symbol                                                 | MBR 20L40 CT | MBR 20L45 CT | MBR 20L50 CT | MBR 20L60 CT | MBR 20L100 CT | MBR 20L150 CT | MBR 20L200 CT | Units |
|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|--------------|--------------|--------------|--------------|---------------|---------------|---------------|-------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                             | V <sub>RRM</sub><br>V <sub>RWM</sub><br>V <sub>R</sub> | 40           | 45           | 50           | 60           | 100           | 150           | 200           | V     |
| RMS Reverse Voltage                                                                                                | V <sub>R(RMS)</sub>                                    | 28           | 31           | 35           | 42           | 70            | 105           | 140           | V     |
| Average Rectified Output Current @T <sub>L</sub> = 75°C (Note 1)                                                   | I <sub>O</sub>                                         | 20.0         |              |              |              |               |               |               | A     |
| Non-Repetitive Peak Forward Surge Current 8.3ms<br>Single half sine-wave superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>                                       | 200          |              |              |              |               |               |               | A     |
| Forward Voltage @I <sub>F</sub> = 20A                                                                              | V <sub>FM</sub>                                        | 0.45         | 0.55         |              | 0.70         | 0.85          |               | V             |       |
| Peak Reverse Current @T <sub>A</sub> = 25°C<br>At Rated DC Blocking Voltage @T <sub>A</sub> = 100°C                | I <sub>RM</sub>                                        | 0.1<br>20    |              |              |              |               |               |               | mA    |
| Typical Junction Capacitance (Note 2)                                                                              | C <sub>j</sub>                                         | 350          | 280          |              | 200          |               |               |               | pF    |
| Typical Thermal Resistance (Note 1)                                                                                | R <sub>θJA</sub>                                       | 3.0          |              |              |              | 2.0           |               |               | °C/W  |
| Operating and Storage Temperature Range                                                                            | T <sub>j</sub> , T <sub>STG</sub>                      | -55 to +150  |              |              |              |               | -55 to +175   |               | °C    |

Note: 1. Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.  
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

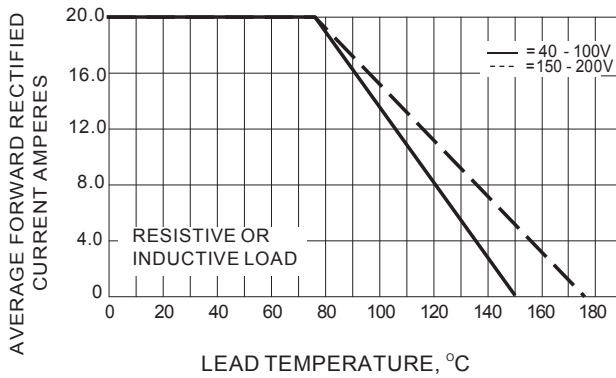


Fig.1- FORWARD CURRENT DERATING CURVE

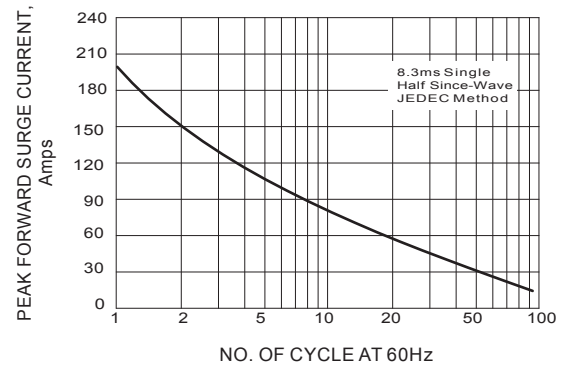


Fig.2- MAXIMUM NON - REPETITIVE SURGE CURRENT

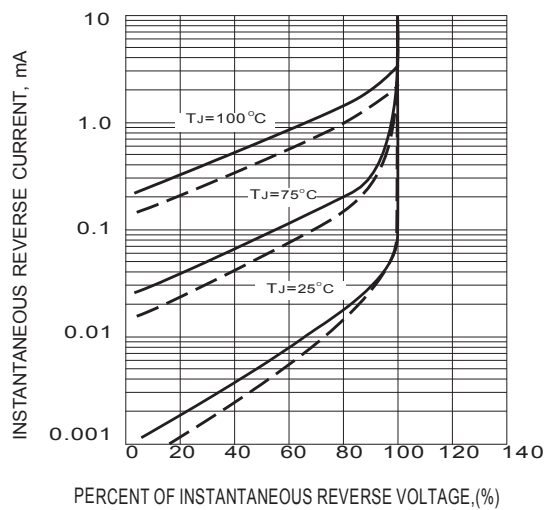


Fig.3- TYPICAL REVERSE CHARACTERISTICS

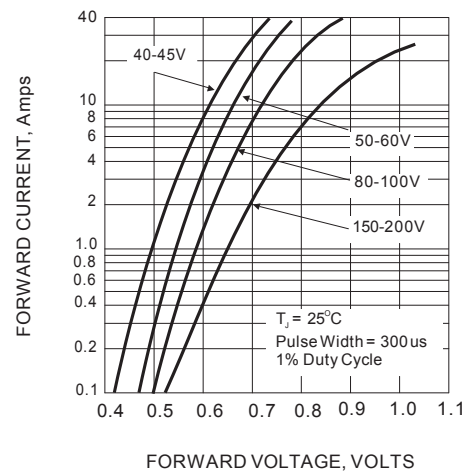


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS