

CRYSTAL CONTROLLED OSCILLATORS

3.3V LVC MOS SURFACE MOUNT 5x3.2mm CLOCK OSCILLATOR



7213, 7223,
7233

ABSOLUTE MAXIMUM RATINGS TABLE 1.0

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Storage Temperature		-55	-	125	°C	
Supply Voltage	(Vcc)	-0.5	-	7.0	Vdc	

MODEL SPECIFICATIONS: TABLE 2.0

MODEL 7213

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Frequency Range	(Fo)	1.8	-	160	MHz	
Frequency Tolerance:		-25	-	25	ppm	1

MODEL 7223

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Frequency Range	(Fo)	1.8	-	160	MHz	
Frequency Tolerance:		-50	-	50	ppm	1

MODEL 7233

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Frequency Range	(Fo)	1.8	-	160	MHz	
Frequency Tolerance:		-100	-	100	ppm	1

OPERATING SPECIFICATIONS TABLE 3.0

PARAMETER	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Operating Temperature Range	-40	-	85	°C	
Supply Voltage	(Vdd)	3.0	3.3	3.6	Vdc
Supply Current	1.5 to 49.999 MHz	(Icc)	-	20	mA
	50 to 79.999 MHz	(Icc)	-	30	mA
	80 to 124.999 MHz	(Icc)	-	40	mA
	125 to 160.999 MHz	(Icc)	-	50	mA

INPUT CHARACTERISTICS TABLE 4.0

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Enable Voltage	(Vih)	70% Vdd	-	-	Vdc	2
Disable Voltage	(Vil)	-	-	30% Vdd	Vdc	
Enable Time		-	-	10	ms	
Disable Time		-	-	150	ns	
Output Disable Current	(Ioc)	-	-	10	uA	

LVC MOS OUTPUT CHARACTERISTICS TABLE 5.0


PARAMETER	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE	
LOAD	-	-	15	pF		
Voltage	(High)	(Voh)	2.70	-	Vdc	
	(Low)	(Vol)	-	0.36	Vdc	
Current	(High)	(Ioh)	-2	-	mA	
	(Low)	(Iol)	-	2	mA	
Duty Cycle	1.5 to 49.999 MHz	45	50	55	%	3
	50 to 160 MHz	40	50	60	%	3
Rise / Fall Time	1.5 to 69.999 MHz	-	3	6	ns	4
	70 to 160 MHz	-	1	2	ns	4
Start-Up Time	-	-	10	ms		
Period Jitter	-	3	5	ps RMS		
Phase Jitter (BW=12kHz to 20MHz)	-	0.5	1	ps RMS		

PACKAGE CHARACTERISTICS TABLE 6.0

Package	Hermetically sealed ceramic package and metal cover
---------	---

Note:

- Inclusive of calibration @ 25°C, frequency vs. temperature stability, supply voltage change, load change, shock and vibration, 10 years aging.
- Oscillator output is enabled with no connection on pad 1.
- Duty Cycle measured at 50% of Vcc.
- Rise and Fall times measured from 10% to 90%.

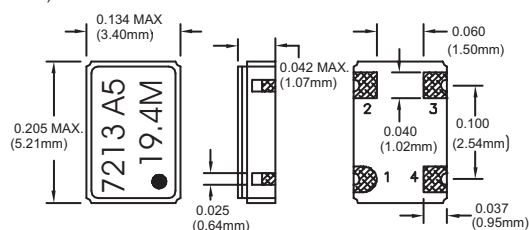

PAD	CONNECTION
1	ENABLE/DISABLE
2	GROUND
3	OUTPUT
4	Vcc

Dimensional Tolerance: ±0.2" (.508mm)
±0.005" (.127mm)

DESCRIPTION

The Connor-Winfield models 7213, 7223 and 7233 are 3.3V LVC MOS, Surface Mount, Fixed Frequency Crystal Oscillators (XO) designed for use in all applications requiring precision clocks. These oscillators feature low stand-by current (10uA) when output is disabled. The surface mount package is designed for high-density mounting and is optimum for mass production.

FEATURES

1.8 to 160 MHz

3.3V OPERATION

TRI-STATE ENABLE / DISABLE FUNCTION

OVERALL FREQUENCY TOLERANCE:

7213 ±25ppm

7223 ±50ppm

7233 ±100ppm

TEMPERATURE RANGE: -40 to 85°C

POWER SAVING FUNCTION: 10uA when disabled.

CERAMIC SURFACE MOUNT PACKAGE

TAPE AND REEL PACKAGING

RoHS COMPLIANT / LEAD FREE

ORDERING INFORMATION

7213 - 019.44M

CLOCK
SERIES


CENTER
FREQUENCY

Specifications subject to change without notice.

CRYSTAL CONTROLLED OSCILLATORS

<p>ENVIRONMENTAL CHARACTERISTICS</p> <p>TEMPERATURE CYCLE: The specimen shall meet electrical characteristics after tested 5 cycles of -55°C/30 min & +125°C/30 min.</p> <p>HERMETICAL No bubbles appear in Flourinert (FC-43) at 125°C ±5°C, for 5 minutes.</p> <p>SOLVENT RESISTANCE: Marking will withstand immersion in Isopropyl Alcohol or Trichloroethylene.</p>	<p>TEST CIRCUIT</p>
<p>SOLDERING</p> <p>GENERAL CONDITIONS: 260°C max x 10 sec max x 2 times max or 230°C max x 180 sec max x 1 time.</p> <p>TYPICAL OPERATION DATA (Vapor phase reflow) 20 to 100 sec up to 215°C, 50 sec at 215°C then down to room temperature per 1 to 5°C/sec</p>	<p>OUTPUT WAVEFORM</p>
<p>MECHANICAL CHARACTERISTICS</p> <p>FREE DROP: The specimen shall meet electrical characteristics after tested 3 times Free Drop testing on the hard wooden board from a height of 75cm.</p> <p>VIBRATION: The specimen shall meet electrical characteristics after tested by the following conditions: 10-55Hz 1.5mm Amplitude, 55-2000Hz 20G's, 2 hours for each plane.</p> <p>THERMAL SHOCK: After applied Thermal Shock of 260°C max x 10 sec max x 2 times, or 230°C max x 180 sec max, the specimen shall meet electrical characteristics.</p> <p>SOLDERABILITY: (EIAJ-RGX-0102/1D1 Condition 1a)</p> <ol style="list-style-type: none"> Flux: MIL-F-14256 (WW Rosin=25%, Isopropyl alcohol=75%) Solder: QQ-S-571 (Sn=63%, Pb=37%) Solder bath temperature: 235°C ±5°C. Depth of immersion: Up to electrical terminal. Immersing time: Within 2 sec ±0.5 sec into solder bath. <p>After performing the above procedures, a newly soldered coverage shall be greater than 90%.</p>	<p>SUGGESTED PAD LAYOUT</p> <p>Bypass capacitor, C-by, should be ceramic capacitor ≥ .01uF.</p>

TAPING AND REEL DIMENSIONS

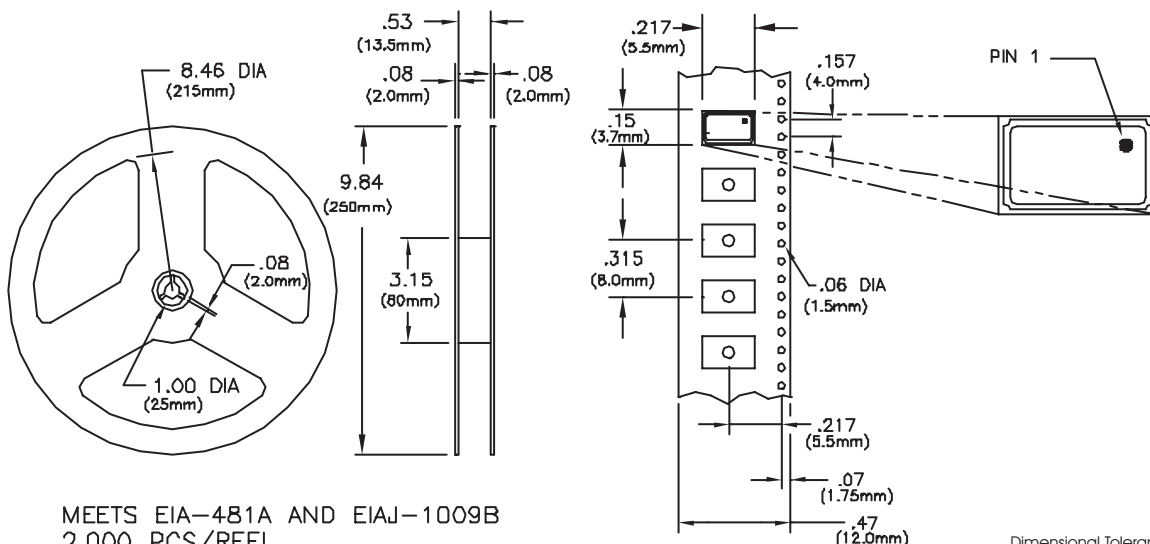

MEETS EIA-481A AND EIAJ-1009B
2,000 PCS/REEL

Dimensional Tolerance: ±.02" (.508mm)
±.005" (.127mm)

Specifications subject to change without notice.