

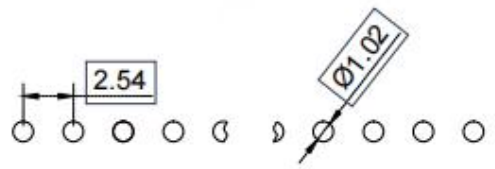



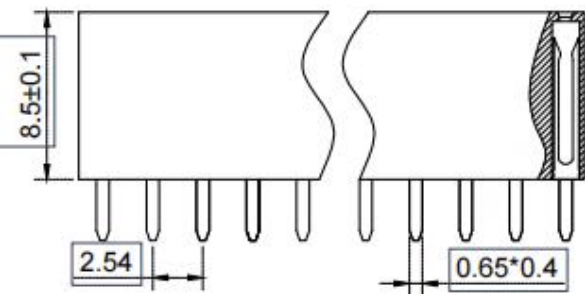

N=PIN数

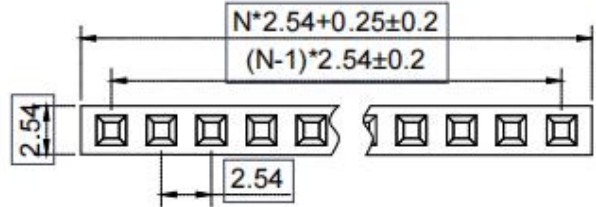

P.C.B LAYOUT

Material材料
 Insulator塑胶: PBT (UL 94V-0)
 Contact 端子: Brass黄铜
 Contact plating表面镀层: Au or Sn over 50u" Ni 里镍外金or锡
 Electrical Characteristics电气特性
 Current rating额定电流: 2.5Amps
 Dielectric Withstanding Voltage耐压: AC 1000V for 1 Minute.
 Insulator Resistance绝缘电阻: 1000MΩ Min.
 Contact Resistance接触电阻: 20MΩ Max.
 Operating Temperature工作温度: -40℃~+105℃
 Max.Processing Temp瞬时温度:
 120℃ for 30-60 seconds
 (120℃ for 10 seconds)

未注尺寸公差			2.54-1*40		上海洲日电子有限公司	
尺寸	长度	公差	角度	版本编号	Shanghai Zhouri Electronics CO.,LTD	
X.	±0.3		±5°	20171018 A/0	上海康司玛电子设备进出口有限公司	
X.X	±0.2		±3°	图纸编号	Shanghai KangSiMa Electronic Equipment Import and export Co.,LTD	
X.XX	+0.15			ZR20171018-291	TEL:86-21-34975176/51571121	
制图	唐元金	201171018		物料编号	1:1 mm 图幅 A4	
审核	张海娜	201171018		第三视角		
核准	章妹	201171018				