

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0986581231

Status:


Active

Overview:

[mox_crimp_terminals](#)

Description:

MOX Crimp Terminal, Female, 0.635mm (.025"), 20-24 AWG (0.22-0.60mm²), Reel, 2 points selective gold

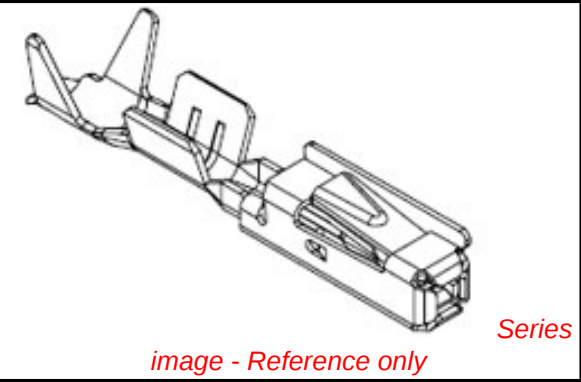

Documents:

[Packaging Specification \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Drawing \(PDF\)](#)

General	
Product Family	Crimp Terminals
Series	98658
Comments	Terminal has Stainless Steel Sleeve
Crimp Quality Equipment	Yes
Overview	mox_crimp_terminals
Product Name	MOX
Physical	
Durability (mating cycles max)	20
Gender	Female
Material - Metal	Copper-Nickel-Silicon, Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Packaging Type	Reel
Plating min: Mating (µin)	16.00
Plating min: Mating (µm)	0.40
Plating min: Termination (µin)	40.00
Plating min: Termination (µm)	1.00
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.20-1.80mm (.047-.071")
Wire Size AWG	N/A
Wire Size mm²	0.22 TO 0.60

Electrical	
Current - Maximum per Contact	7.5A

Material Info

Reference - Drawing Numbers	
Packaging Specification	PK-98658-006
Sales Drawing	SD-98658-004

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

98658Series

Use With

all 0.635mm (.025") MOX Housings

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.


Global

Description	Product #
Extractor Tool for 2.8mm Crimp Terminals	0638136900
Extractor Tool for 2.8mm Crimp Terminals	0638137000
FineAdjust™ Applicator	0638666000
Hand Crimp Tool	0638119300
MOX Extraction Tool	0638132600



This document was generated on 05/31/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


FORME ADMISE
ALLOWED VERSION

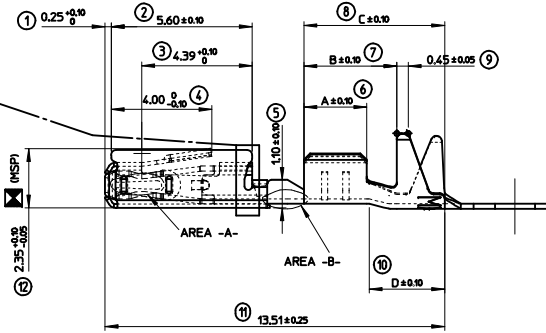


X-X

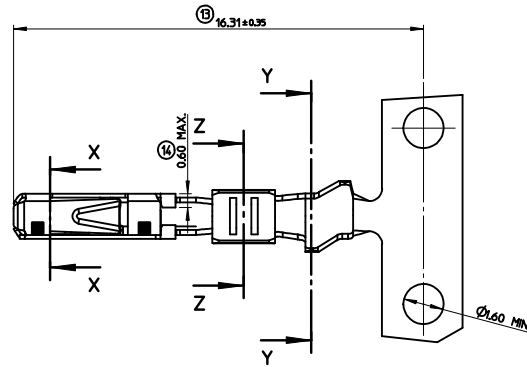


Z-Z



Y-Y



MOLEX REFERENCE	AREA -A- (GAP AREA)	AREA -B-	CRIMPING AREA	Wire size range	Longeure Length	Seriesage Conductor Wire Crimp	Seriesage Isolation Insulation Crimp	Poids Weight
TIN PLATED VERSION	0986581211	HOT TIN DP Sn = 10 to 30 Hs						
GOLD PLATED VERSION	0986581221	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 10 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.	0.22 to 0.60 mm2	A=250 B=370 C=560 D=300	E=190 F=210 Rc=0.50	G=290 H=280 Rb=0.80	
GOLD PLATED VERSION	0986581231	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 10 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.				
TIN PLATED VERSION	0986581212	HOT TIN DP Sn = 10 to 30 Hs						
GOLD PLATED VERSION	0986581222	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 10 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.	0.75 mm2	A=280 B=370 C=560 D=270	E=225 F=225 Rc=0.50	G=290 H=280 Rb=0.80	0.600 g
GOLD PLATED VERSION	0986581232	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 10 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.				
TIN PLATED VERSION	0986581213	HOT TIN DP Sn = 10 to 30 Hs						
GOLD PLATED VERSION	0986581223	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 10 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.	0.22 to 0.50 mm2	A=250 B=370 C=560 D=300	E=180 F=180 Rc=0.40	G=230 H=230 Rb=0.70	
GOLD PLATED VERSION	0986581233	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Au= 0.4 Hs MIN. Ni= 1.0 Hs MIN.	Sn = 10 to 5.0 Hs MIN. Ni = 1.0 Hs MIN.				



NOTE:

- MATERIAL: CONTACT BODY: HIGH CONDUCTIVE COPPER ALLOY.
SLEEVE: STAINLESS STEEL.
- PACKAGING SPECIFICATION: PK-98658-006.
- CRIMPING PARAMETERS AND CRIMPING TOOL DEFINITION: SEE CS-98658-001.

INDICATION DIMENSIONS S.P.C DENOTES S.P.C. DIMENSIONS	INDICATION DIMENSIONS DETERMINANT LES CAPACITES MACHINE
INDICATION DIMENSIONS DETERMINANT LES MACHINE'S ABILITIES	INDICATION DIMENSIONS FONCTIONNELLES DENOTES FUNCTIONAL DIMENSIONS
QUANTITE PAR FEUILLE INDIVIDUELLE QUANTITY PER INDIVIDUAL SHEET	
2	4
2	0

CHANGED IN: E & F FOR 0.5 mm EC NO: G2008-0492 DRAWN BY: 2008/12/04 CHKD BY: 2008/12/02 APPROVED BY: 2008/12/08		DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION																	
			<table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>2 PLACES</td><td>± 0.</td><td>± ---</td></tr><tr><td>1 PLACE</td><td>± 0.</td><td>± ---</td></tr></table>			mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.	± ---	1 PLACE	± 0.	± ---	DRAWN BY JAMSSON		DATE 1998/06/01	MOX 0.63 TERMINAL RECEPTACLE TERMINAL GENERIC CONTROL DRAWING MOLEX INCORPORATED			
				mm	INCH																					
			4 PLACES	± ---	± ---																					
			3 PLACES	± ---	± ---																					
			2 PLACES	± 0.	± ---																					
1 PLACE	± 0.	± ---																								
		CHECKED BY MANDRE		DATE 1999/10/14																						
		APPROVED BY CBOUCHAN		DATE 1999/10/14																						
		ANGULAR ± 1/2°		DOCUMENT NO. SD-98658-004																						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE CHART		SHEET NO. 1 OF 1																				
SIZE A1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																								