

CLR130W, CLR131W, CLR132W


NPN Silicon Photodarlingtons

CLR130W, CLR131W, and CLR132W are exact replacements for obsolete part numbers CLR2049, CLR2050 and CLR2060.



Clairex
Technologies, Inc.

April, 2002

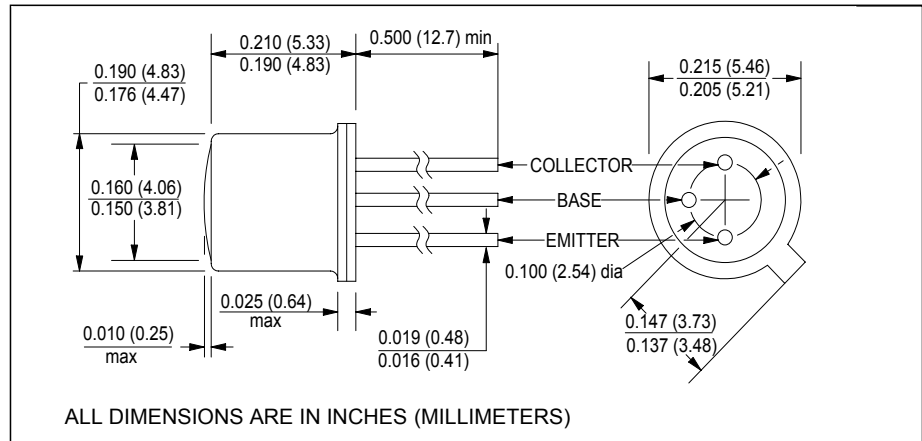

features

- high sensitivity
- $\pm 35^\circ$ acceptance angle
- TO-18 hermetically sealed package
- transistor base is bonded
- RoHS compliant

description

The CLR130W-CLR132W series are NPN silicon photodarlingtons mounted in TO-18 flat window packages. The wide acceptance angle provided by the flat window enables even reception over a relatively large area. Photodarlingtons allow high sensitivity at low irradiance levels. These devices are mechanically and spectrally matched to the CLR130-CLR133 series IREDs. For additional information, call Clairex.

absolute maximum ratings ($T_A = 25^\circ\text{C}$ unless otherwise stated)

storage temperature	-65°C to +150°C
operating temperature	-65°C to +125°C
lead soldering temperature ⁽¹⁾	260°C
collector-emitter voltage	15V
continuous collector current	50mA
continuous power dissipation ⁽²⁾	250mW

notes:

1. 0.06" (1.5mm) from the header for 5 seconds maximum
2. Derate linearly 2.0mW/°C from 25°C free air temperature to $T_A = +125^\circ\text{C}$.

electrical characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

symbol	parameter	min	typ	max	units	test conditions
I_L	Light current ⁽¹⁾	CLR130W CLR131W CLR132W	0.2 0.6 1.4	- - -	mA mA mA	$V_{CE}=5V$, $E_e=0.06\text{mW}/\text{cm}^2$
I_{CEO}	Collector dark current	-	-	100	nA	$V_{CE}=10V$, $E_e=0$
$V_{(BR)CEO}$	Collector-emitter breakdown	15	-	-	V	$I_C=100\mu\text{A}$
t_r	Output rise time	-	100	-	μs	$V_{CE}=5V$, $R_L=100\Omega$.
t_f	Output fall time	-	150	-	μs	$V_{CE}=5V$, $R_L=100\Omega$.
θ_{HP}	Total angle at half sensitivity points	-	70	-	deg.	

note: 1. Radiation source for all light current testing is a 940nm IRED.

Clairex reserves the right to make changes at any time to improve design and to provide the best possible product.

Revised 3/13/06

Clairex Technologies, Inc.
Phone: 972-265-4900

1301 East Plano Parkway
Fax: 972-265-4949

Plano, Texas 75074-8524
www.clairex.com