
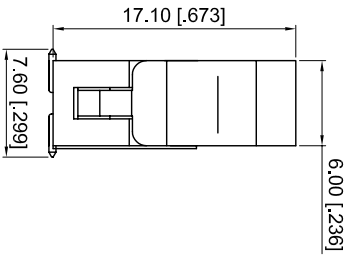
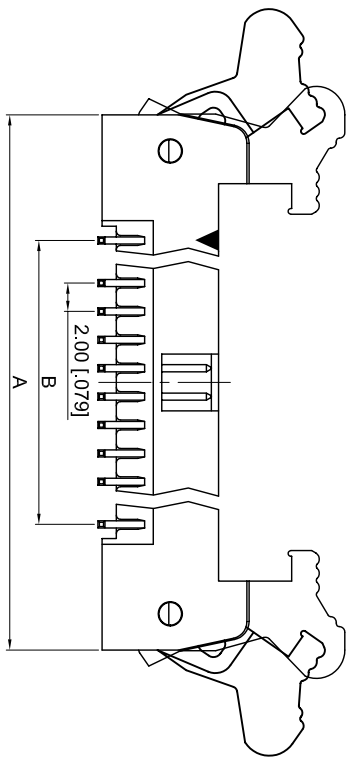


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/29/04	

APPROVED: _____
 DATE: _____ TITLE: _____

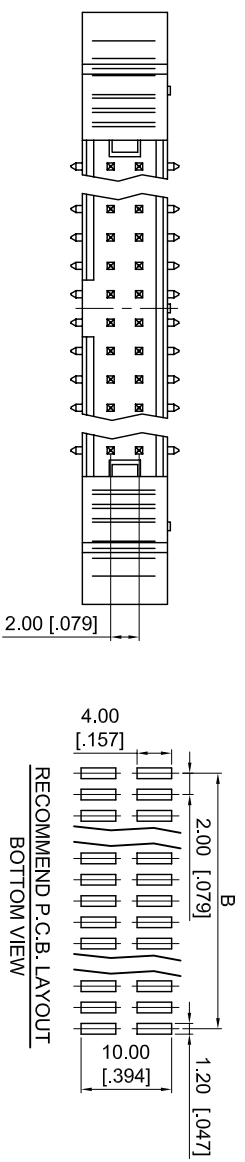

Number Of Position	DIMENSIONS	
	A	B
10	25.70[1.012]	8.00[0.315]
12	27.70[1.091]	10.00[0.394]
14	29.70[1.169]	12.00[0.472]
16	31.70[1.248]	14.00[0.551]
20	35.70[1.406]	18.00[0.709]
22	37.70[1.406]	20.00[0.787]
24	39.70[1.563]	22.00[0.866]
26	41.70[1.642]	24.00[0.945]
30	45.70[1.799]	28.00[1.102]
32	47.70[1.878]	30.00[1.181]
34	49.70[1.957]	32.00[1.260]
40	55.70[2.193]	38.00[1.496]
44	59.70[2.350]	42.00[1.654]
50	65.70[2.587]	48.00[1.890]
68	83.70[3.295]	66.00[2.598]

SPECIFICATIONS:

Material: Hi-Temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on solder tails
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amps max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40 to +85
 Max processing temperature: 230 deg C for 30 to 60 seconds

A

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2MM LATCHING BOX HEADER, STRAIGHT SMT, SELECTIVE GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLDERS	
.X	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXXX	± .010		
APPROVALS	DATE				
DRAWN	SS	9/29/04			
CHECKED					
APPROVED					
SIZE	PART NO.	SCALE	NTS	SHEET	1 OF 1
X	2MHR-XX-VSGA-S-SMT				
REV.					