
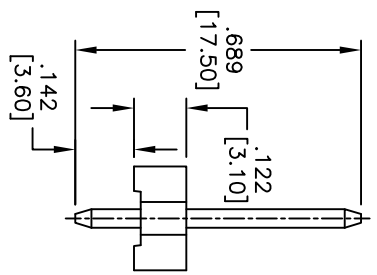
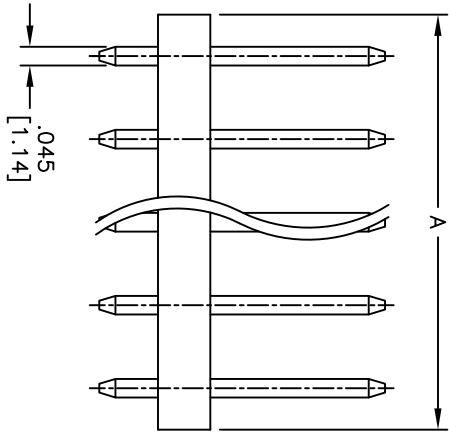
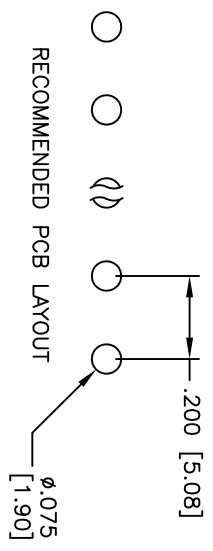


| Rev | AWO # | Description | Date     | Appr |
|-----|-------|-------------|----------|------|
| -   |       | RELEASED    | 12/08/10 |      |

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

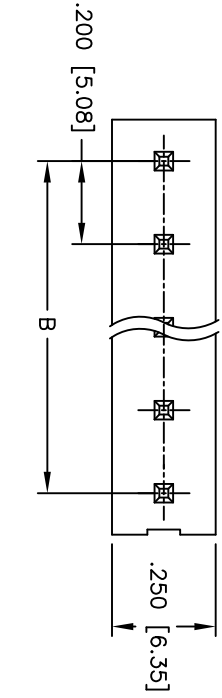

Positions: 2 thru 10  
 A = .200 [5.08] x No. of Positions  
 B = .200 [5.08] x No. of Spaces

**SPECIFICATIONS:**  
 Material: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Contacts: Brass  
 Plating: Tin over Copper underplate overall  
 Electrical:  
 Operating voltage: 250V AC,DC  
 Current rating: 7A AC,DC  
 Contact resistance: 10 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Temperature Rating:  
 Anti-static plastic bags  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds



|  |              |
|--|--------------|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE INCHES [MM] |              |
| TOLERANCES: EXCEPT AS NOTED                                  |              |
| INCHES   | HOLDS        |
| .X ± .10   | Ø.X ± .10    |
| .XX ± .020   | Ø.XX ± .015  |
| .XXX ± .015  | Ø.XXX ± .010 |
| APPROVALS  | DATE         |
| DRAWN  | DY           |
| CHECKED  |              |
| APPROVED   |              |

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .200 [5.08] POWER HEADER, STRAIGHT

|              |            |              |
|--------------|------------|--------------|
| SIZE         | PART NO.   | REV.         |
| X            | LHF-XX-SA2 | -            |
| REF: S00099T | SCALE: NTS | SHEET 1 OF 1 |