General Description：

HM19N40, the silicon N-channel Enhanced VDMOSFETs, is obtained by the self-aligned planar Technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency. The package form is TO-220AB, which accords with the RoHS standard..

V_{DSS}	400	V
I_D	19	A
P_D (T_C=25℃)	150	W
$R_{DS(ON)Typ}$	0.23	Ω

TO-220AB



1.Gate 2. Drain 3. Source

Features：

- **Fast Switching**
- **Low ON Resistance(Rdson≤0.30Ω)**
- **Low Gate Charge (Typical Data:42nC)**
- **Low Reverse transfer capacitances(Typical:12.3pF)**
- **100% Single Pulse avalanche energy Test**

Applications：

Power switch circuit of electron ballast and adaptor.

Inner Equivalent Principium Chart



Absolute（T_J= 25℃ unless otherwise specified）：

Symbol	Parameter	Rating	Units
V_{DSS}	Drain-to-Source Voltage	400	V
I_D	Continuous Drain Current T_C = 25 °C	19	A
	Continuous Drain Current T_C = 100 °C	12	A
I_{DM} [a1]	Pulsed Drain Current T_C = 25 °C	76	A
V_{GS}	Gate-to-Source Voltage	±30	V
E_{AS} [a2]	Single Pulse Avalanche Energy	720	mJ
dv/dt [a3]	Peak Diode Recovery dv/dt	5.0	V/ns
P_D	Power Dissipation T_C = 25 °C	150	W
	Derating Factor above 25°C	1.2	W/℃
T_J，T_{stg}	Operating Junction and Storage Temperature Range	150，–55 to 150	℃
T_L	Maximum Temperature for Soldering	300	℃

Electrical Characteristics（T_J= 25℃ unless otherwise specified）：

OFF Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
V_{DSS}	Drain to Source Breakdown Voltage	V_{GS}=0V, I_D=250μA	400	--	--	V
$\Delta BV_{DSS}/\Delta T_J$	Bvdss Temperature Coefficient	ID=250uA,Reference25℃	--	0.46	--	V/℃
I_{DSS}	Drain to Source Leakage Current	V_{DS} = 400V, V_{GS}= 0V, T_j = 25℃	--	--	1	μA
		V_{DS} =320V, V_{GS}= 0V, T_j = 125℃			100	
$I_{GSS(F)}$	Gate to Source Forward Leakage	V_{DS} =0V, V_{GS}= 30V	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	V_{DS} =0V, V_{GS}= -30V	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	V_{GS}=10V,I_D=9.5A	--	0.23	0.30	Ω
$V_{GS(TH)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250μA	2.0	--	4.0	V
Pulse width tp≤300μs, δ ≤2%						

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
g_{fs}	Forward Trans conductance	V_{DS}=15V, I_D =9.5A	--	15	--	S
Rg	Gate resistance	f = 1.0MHz	--	2.5	--	Ω
C_{iss}	Input Capacitance	V_{GS} = 0V V_{DS} = 25V f = 1.0MHz	--	1919	--	pF
C_{oss}	Output Capacitance		--	206	--	
C_{rss}	Reverse Transfer Capacitance		--	12.3	--	

Resistive Switching Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	I_D =19A V_{DD} = 200V R_G = 25Ω	--	21	--	ns
tr	Rise Time		--	36	--	
$t_{d(OFF)}$	Turn-Off Delay Time		--	55	--	
t_f	Fall Time		--	55	--	
Q_g	Total Gate Charge	I_D =19A V_{DD} =320V V_{GS} = 10V	--	42	--	nC
Q_{gs}	Gate to Source Charge		--	9.1	--	
Q_{gd}	Gate to Drain (“Miller”)Charge		--	17	--	

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
I_S	Continuous Source Current (Body Diode)	T_C = 25 °C	--	--	19	A
I_{SM}	Maximum Pulsed Current (Body Diode)		--	--	76	A
V_{SD}	Diode Forward Voltage	I_S=19A,V_{GS}=0V	--	--	1.5	V
trr	Reverse Recovery Time	I_S=19A,T_j = 25° C	--	347	--	ns
Qrr	Reverse Recovery Charge	dI_F/dt=100A/us, V_{GS}=0V	--	3183	--	nC
I_{RRM}	Reverse Recovery Current		--	18.3	--	A
Pulse width tp≤300μs, δ ≤2%						

Symbol	Parameter	Max.	Units
$R_{\theta JC}$	Junction-to-Case	0.83	℃/W
$R_{\theta JA}$	Junction-to-Ambient	62.5	℃/W

[a1]: Repetitive rating; pulse width limited by maximum junction temperature
[a2]: L=10.0mH, I_D=12A, Start T_J=25℃
[a3]: I_{SD}=19A,di/dt ≤300A/us,V_{DD}≤$BV_{DS,}$ Start T_J=25℃

Characteristics Curve:

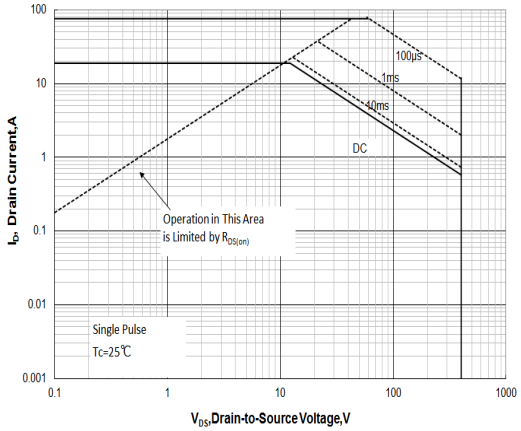

Figure 1 Maximum Forward Bias Safe Operating Area

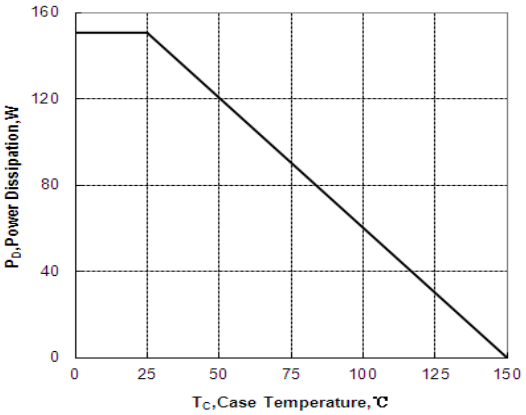

Figure 2 Maximum Power dissipation vs Case Temperature

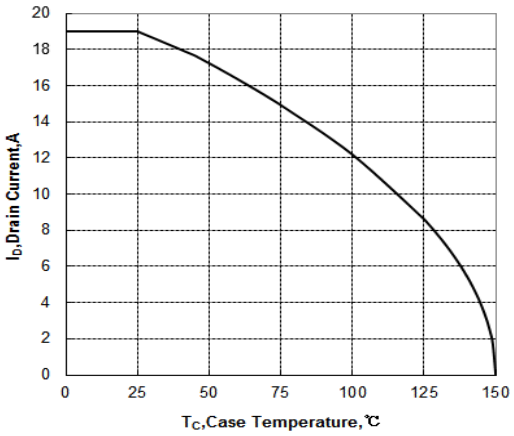

Figure 3 Maximum Continuous Drain Current vs Case Temperature

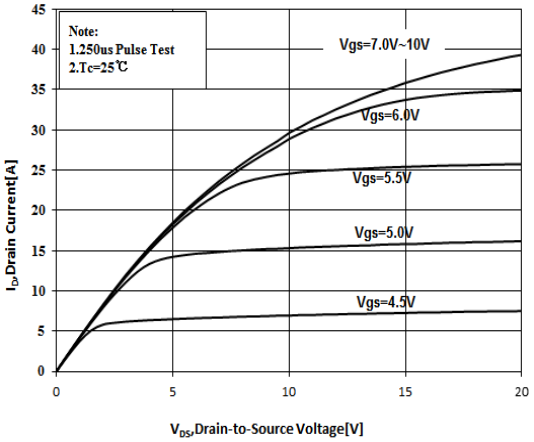

Figure 4 Typical Output Characteristics

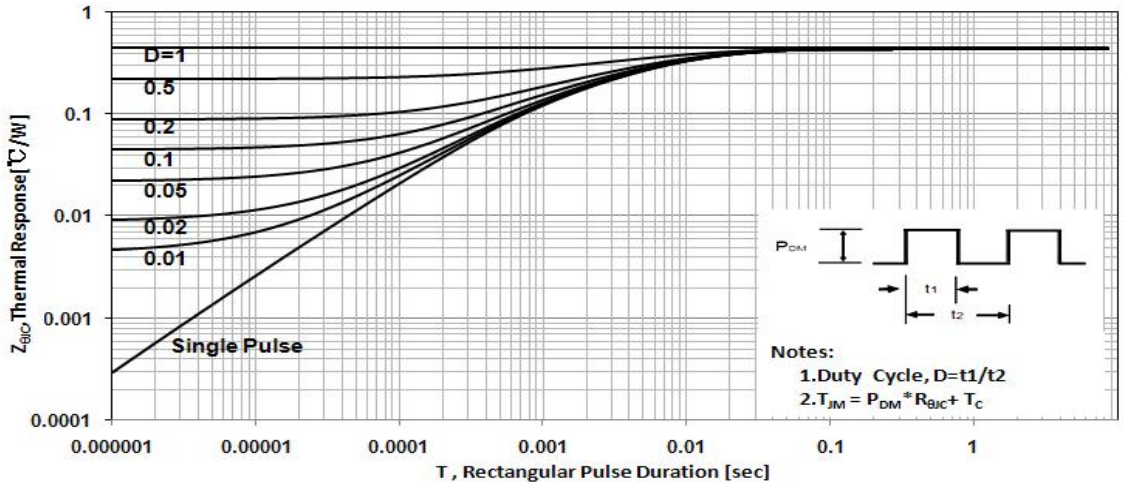

Figure 5 Maximum Effective Thermal Impedance , Junction to Case

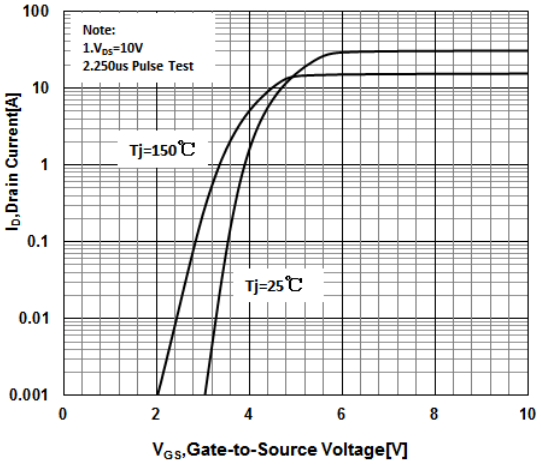

Figure 6 Typical Transfer Characteristics

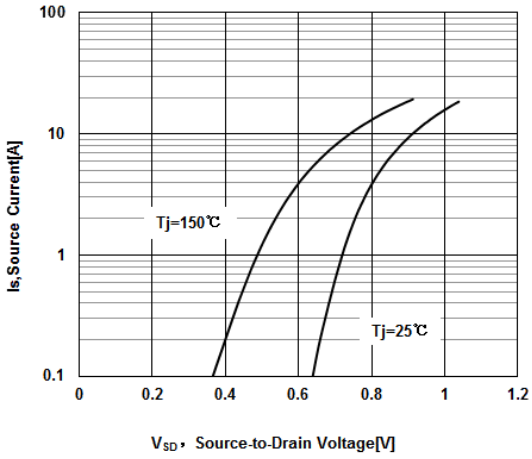

Figure 7 Typical Body Diode Transfer Characteristics

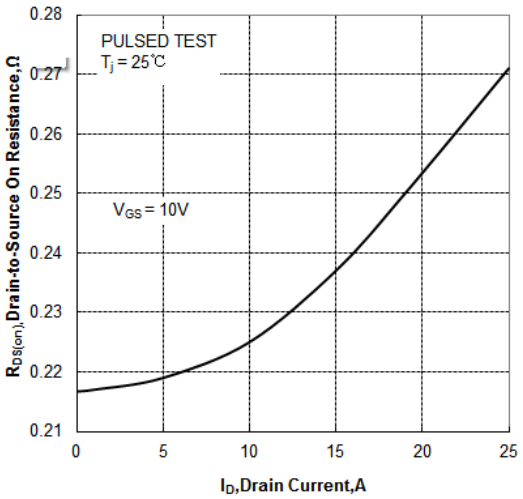

Figure 8 Typical Drain to Source ON Resistance vs Drain Current

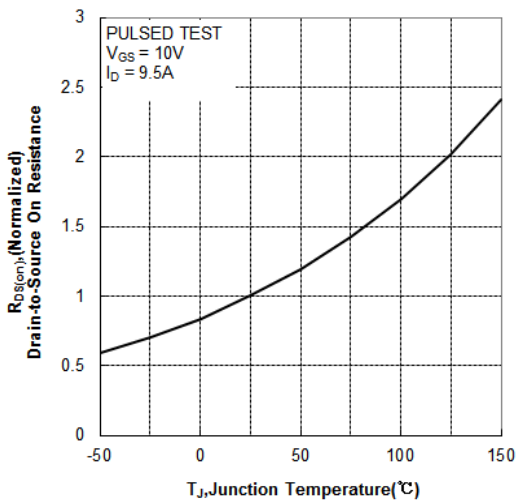

Figure 9 Typical Drian to Source on Resistance vs Junction Temperature

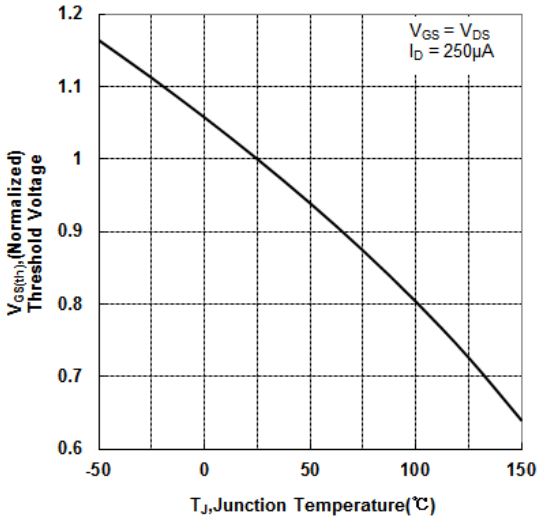

Figure 10 Typical Theshold Voltage vs Junction Temperature

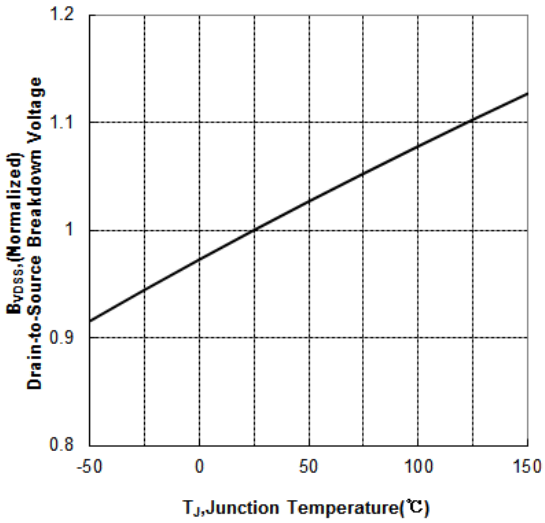

Figure 11 Typical Breakdown Voltage vs Junction Temperature

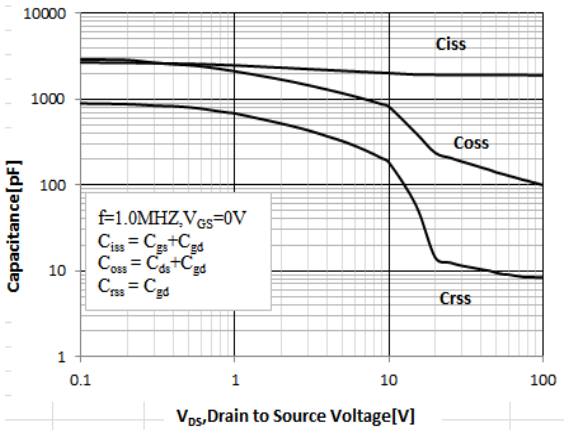

Figure 12 Typical Capacitance vs Drain to Source Voltage

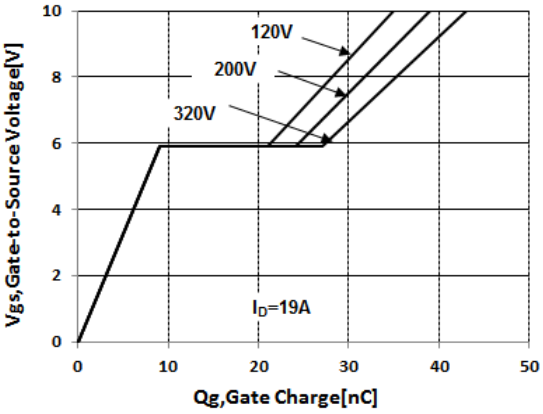

Figure 13 Typical Gate Charge vs Gate to Source Voltage

Test Circuit and Waveform

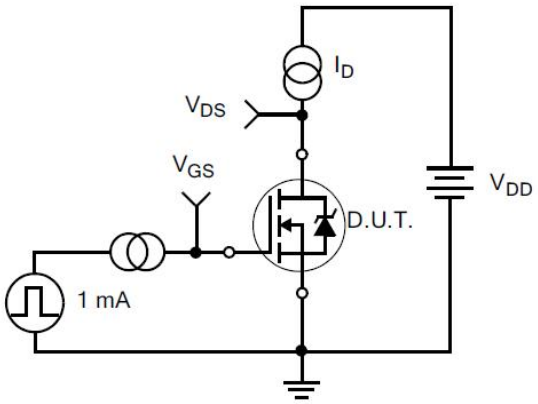

Figure 14. Gate Charge Test Circuit

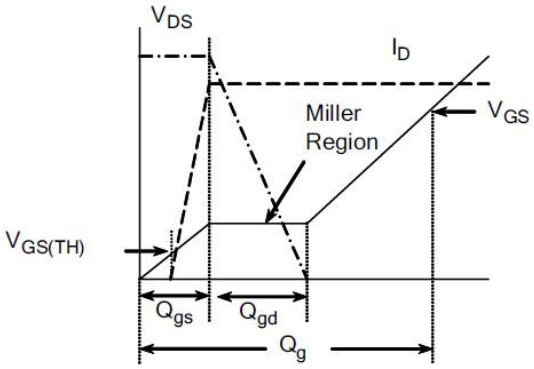

Figure 15. Gate Charge Waveforms

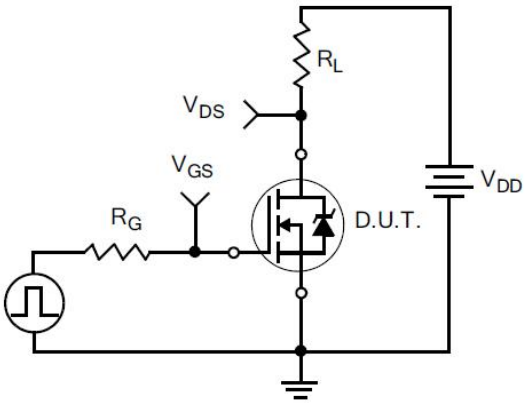

Figure 16. Resistive Switching Test Circuit

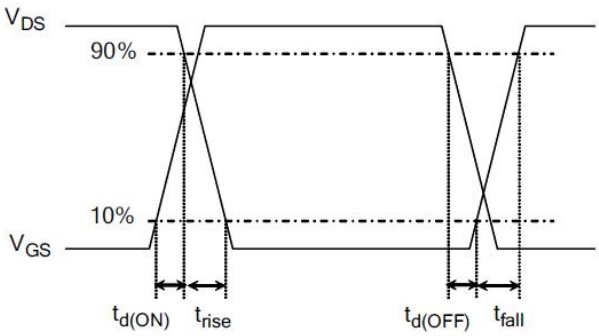

Figure 17. Resistive Switching Waveforms

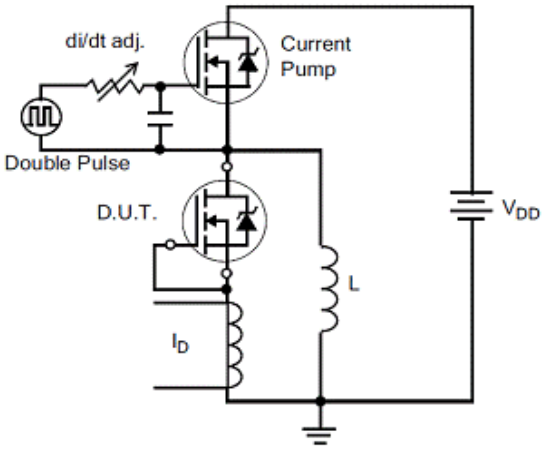

Figure 18. Diode Reverse Recovery Test Circuit

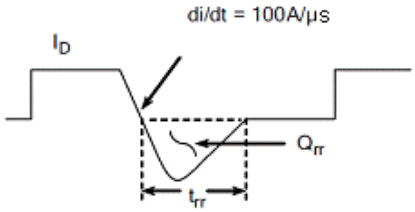

Figure 19. Diode Reverse Recovery Waveform

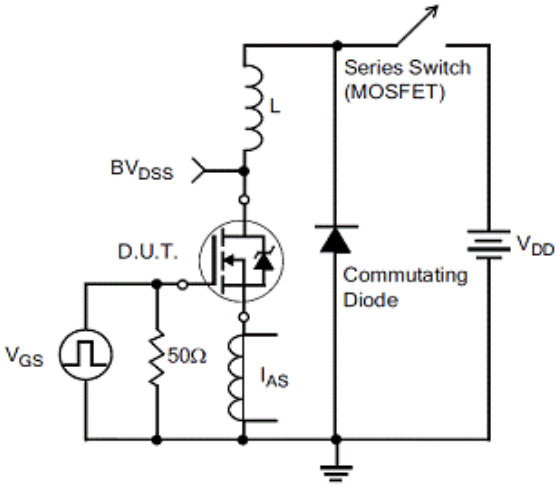

Figure20.Unclamped Inductive Switching Test Circuit

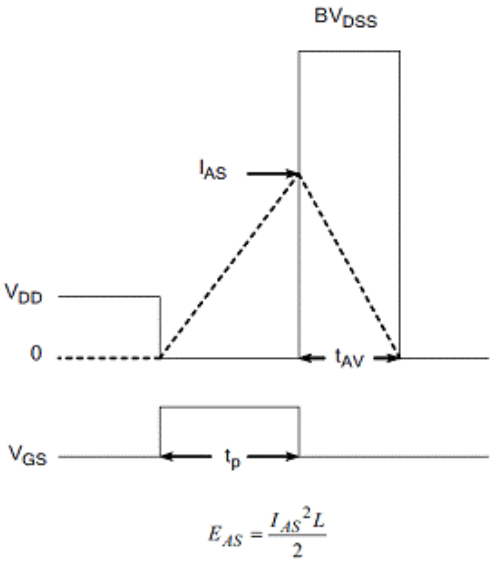

Figure21.Unclamped Inductive Switching Waveform

Package Information

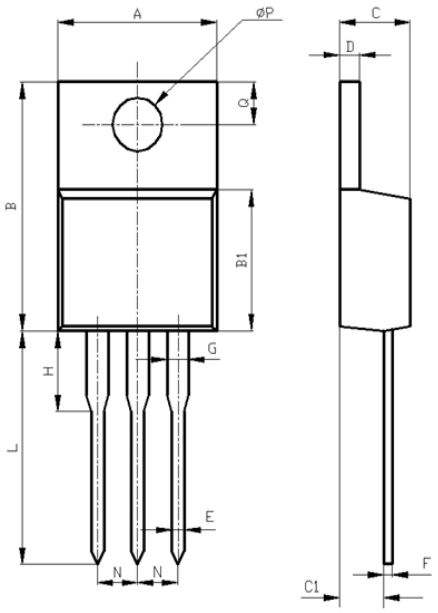

Items	Values(mm)	
	MIN	MAX
A	9.60	10.6
B	15.0	16.0
B1	8.90	9.50
C	4.30	4.80
C1	2.30	3.10
D	1.20	1.40
E	0.70	0.90
F	0.30	0.60
G	1.17	1.37
H	2.70	3.80
L*	12.6	14.8
N	2.34	2.74
Q	2.40	3.00
ΦP	3.50	3.90

*adjustable

TO-220AB Package