
60V, 80A N-CHANNEL POWER MOSFET

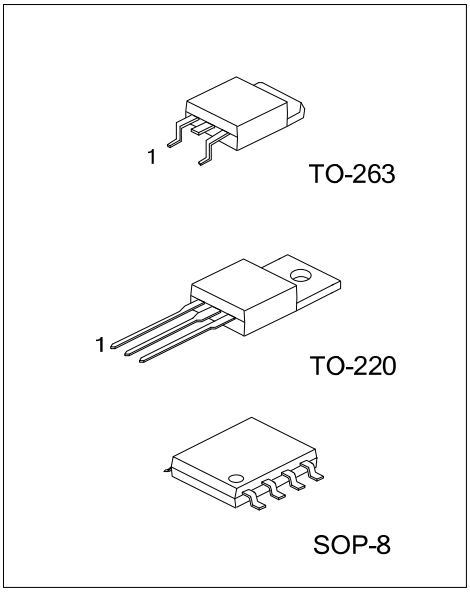

■ DESCRIPTION


The UTC **UTT80N06** is an N-channel enhancement mode power MOSFET using UTC's advanced technology to provide customers with a minimum on-state resistance and high switching speed. It can also withstand high energy pluse in the avalanche and commutation mode.

The UTC **UTT80N06** is suitable for active power factor correction, high efficient switched mode power supplies and electronic lamp ballast based on half bridge topology, etc.

■ FEATURES

* $R_{DS(ON)}$< 10mΩ @ V_{GS}=10V
* High switching speed
* Improved dv/dt capability
* Low Crss(typical 145pF)
* Low Gate Charge(typical 57nC)

■ SYMBOL



■ ORDERING INFORMATION



Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
UTT80N06L-TA3-T	UTT80N06G-TA3-T	TO-220	G	D	S	-	-	-	-	-	Tube
UTT80N06L-TQ2-T	UTT80N06G-TQ2-T	TO-263	G	D	S	-	-	-	-	-	Tube
UTT80N06L-TQ2-R	UTT80N06G-TQ2-R	TO-263	G	D	S	-	-	-	-	-	Tape Reel
UTT80N06L-S08-R	UTT80N06G-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UTT80N06L-TA3-T (1)Packing Type (2)Package Type (3)Lead Free	(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TQ2: TO-263, S08: SOP-8 (3) L: Lead Free, G: Halogen Free

Copyright © 2010 Unisonic Technologies Co., Ltd

■ MARKING INFORMATION

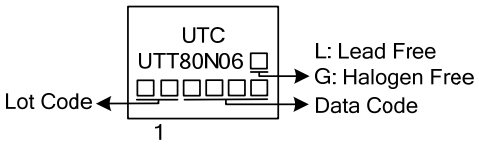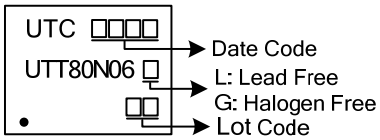PACKAGE	MARKING
TO-220 TO-263	
SOP-8	

■ ABSOLUTE MAXIMUM RATINGS (T_C = 25°C, unless otherwise specified) (Note 2)

PARAMETER			SYMBOL	RATINGS	UNIT
Drain-Source Voltage			V_{DSS}	60	V
Gate-Source Voltage			V_{GSS}	±20	V
Drain Current	Continuous	T_C=25°C	I_D	80	A
		T_C=100°C		65	A
	Pulsed (Note 3)		I_{DM}	320	A
Avalanche Current (Note 3)			I_{AR}	80	A
Avalanche Energy	Single Pulsed (Note 4)		E_{AS}	480	mJ
	Repetitive (Note3)		E_{AR}	17.6	mJ
Power Dissipation	TO-220/TO-263		P_D	147	W
	SOP-8			5.2	
Junction Temperature			T_J	+150	°C
Storage Temperature			T_{STG}	-55~+150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Drain current limited by maximum junction temperature
3. Repetitive Rating: Pulse width limited by maximum junction temperature
4. L =0.15mH, I_{AS} = 80A, V_{DD} = 50V, R_G = 25Ω, Starting T_J = 25°C
5. I_{SD} ≤ 80A, di/dt ≤ 200A/μs, V_{DD} ≤ BV_{DSS}, Starting T_J = 25°C

■ THERMAL DATA


PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-263	θ_{JA}	62.5	°C/W
	SOP-8		110	
Junction to Case	TO-220/TO-263	θ_{JC}	0.85	°C/W
	SOP-8		24	

■ ELECTRICAL CHARACTERISTICS (T_C = 25°C, unless otherwise specified)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	I_D=250μA, V_{GS}=0V, T_J=25°C	60			V
Breakdown Voltage Temperature Coefficient		$\triangle BV_{DSS}/\triangle T_J$	Reference to 25°C, I_D=250μA		0.075		V/°C
Drain-Source Leakage Current		I_{DSS}	V_{DS}=60V, V_{GS}=0V			1	μA
			V_{DS}=48V, T_C=150°C			10	μA
Gate-Source Leakage Current	Forward	I_{GSS}	V_{GS}=+20V, V_{DS}=0V			+100	nA
	Reverse		V_{GS}=-20V, V_{DS}=0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	V_{DS}=V_{GS}, I_D=250μA	2.0		4.0	V
Static Drain-Source On-State Resistance		$R_{DS(ON)}$	V_{GS}=10V, I_D=40A		8.5	10	mΩ
DYNAMIC PARAMETERS							
Input Capacitance		C_{ISS}	V_{GS}=0V, V_{DS}=25V, f=1.0MHz		2450	3190	pF
Output Capacitance		C_{OSS}			910	1190	pF
Reverse Transfer Capacitance		C_{RSS}			145	190	pF
SWITCHING PARAMETERS							
Total Gate Charge at 10V		$Q_{G(TOT)}$	V_{GS}=10V, V_{DS}=48V, I_D=80A (Note 1, 2)		57	74	nC
Gate to Source Charge		Q_{GS}			15		nC
Gate to Drain Charge		Q_{GD}			24		nC
Turn-ON Delay Time		$t_{D(ON)}$	V_{DD}=30V, I_D=80A, R_G=25Ω (Note 1, 2)		32	75	ns
Rise Time		t_R			259	528	ns
Turn-OFF Delay Time		$t_{D(OFF)}$			136	282	ns
Fall-Time		t_F			113	236	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I_S				80	A
Maximum Body-Diode Pulsed Current		I_{SM}				320	A
Drain-Source Diode Forward Voltage		V_{SD}	I_S=80A, V_{GS}=0V			1.4	V

Notes: 1. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%
2. Essentially independent of operating temperature typical characteristics


■ TEST CIRCUITS AND WAVEFORMS

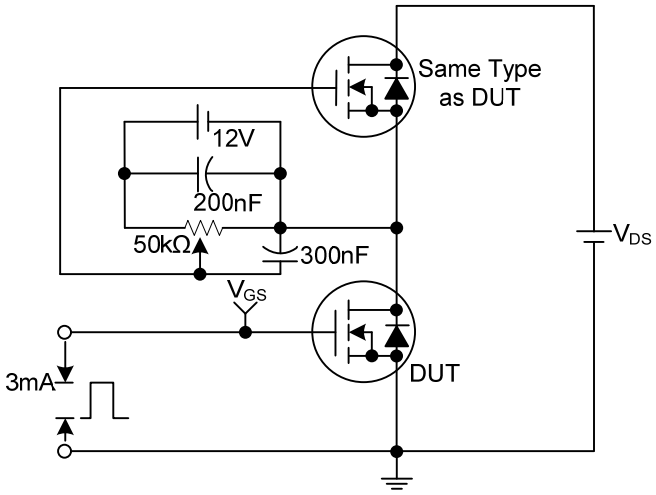


Gate Charge Test Circuit

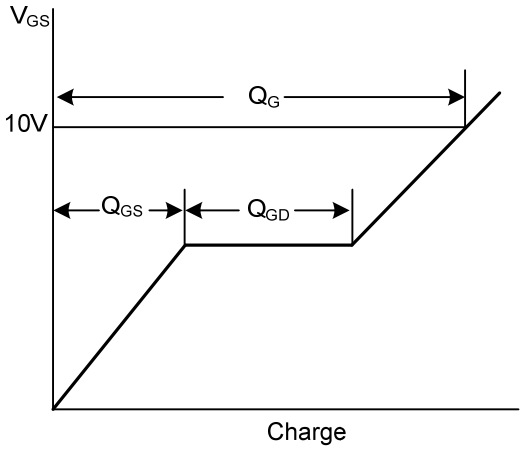


Gate Charge Waveforms

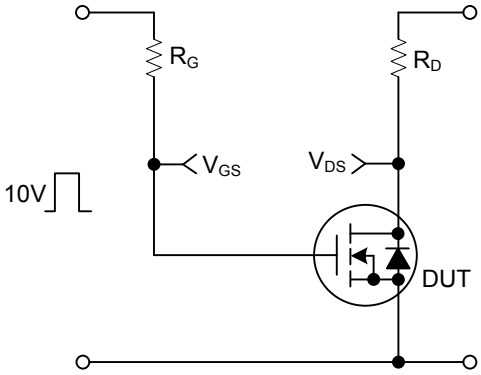


Resistive Switching Test Circuit

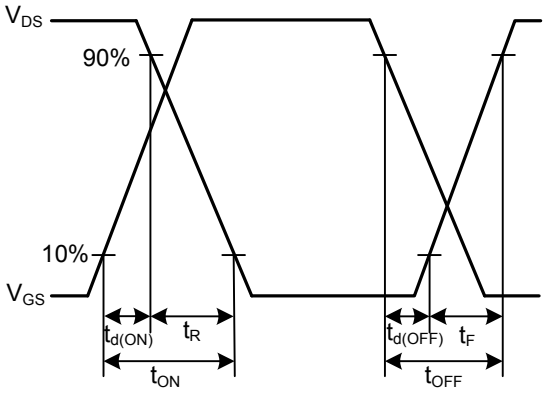

Resistive Switching Waveforms

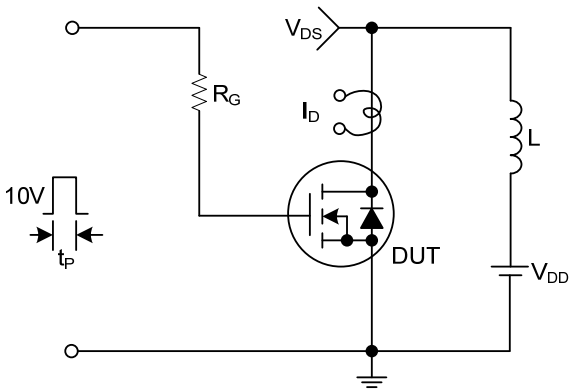



Unclamped Inductive Switching Test Circuit

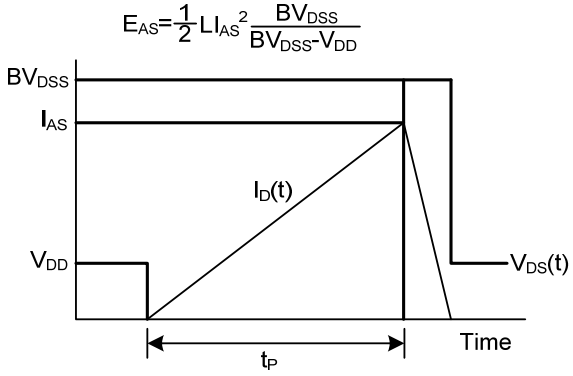



Unclamped Inductive Switching Waveforms

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

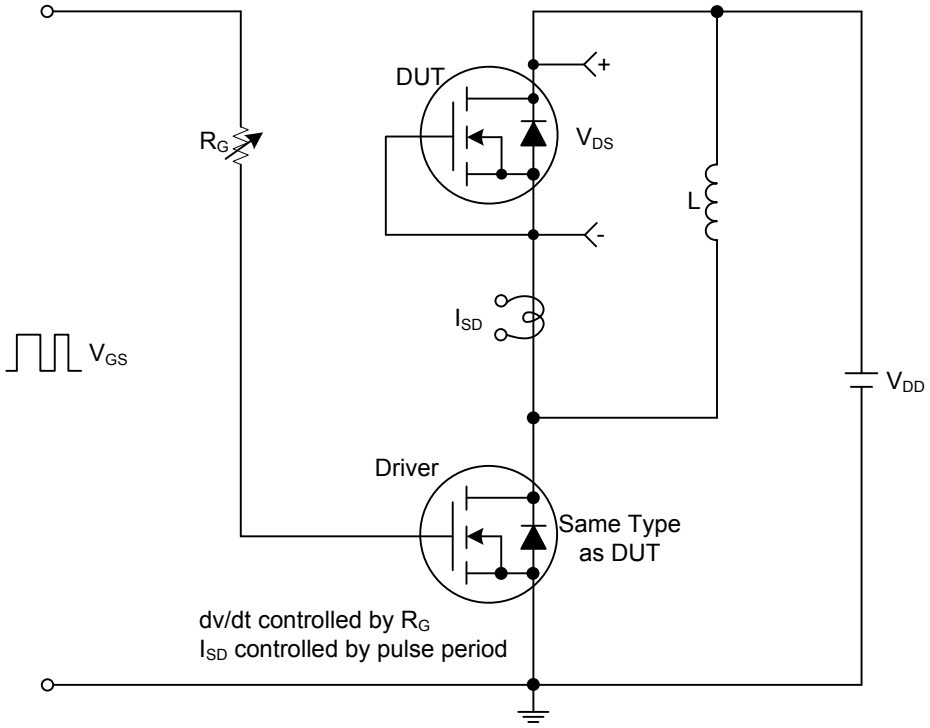

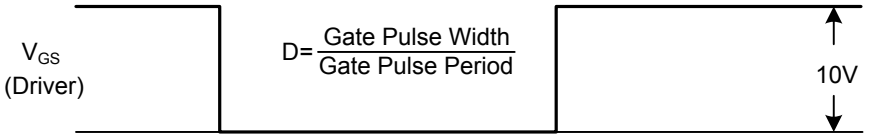

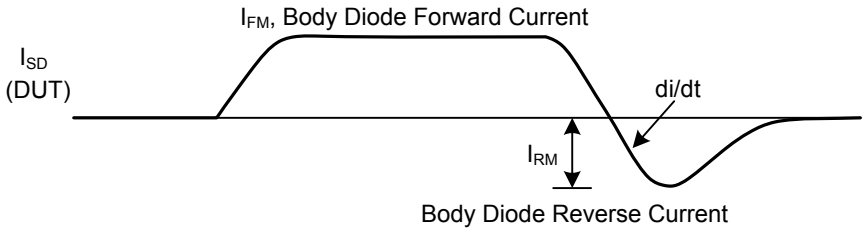

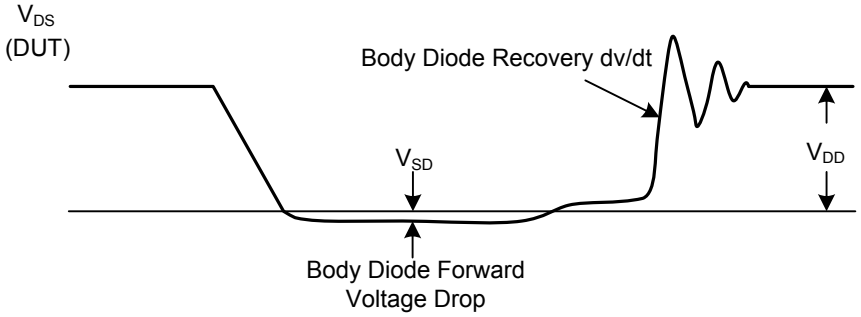

Peak Diode Recovery dv/dt Test Circuit and Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.