


SD

7410-16

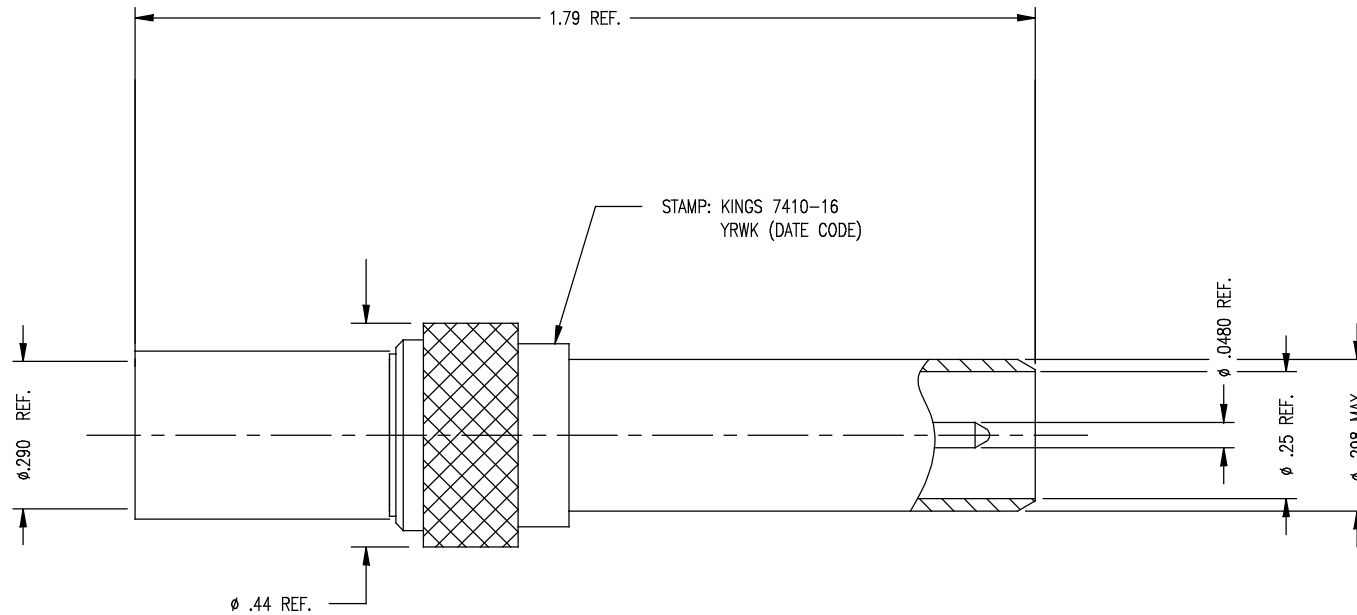

NOTES:

1. FOR USE WITH BELDEN 1694 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-401.
3. FOR CRIMPING USE DIE KTH-2255.
4. MATERIALS:
INSULATOR-TEFLON, ASTM-D-4894.
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B135, C31600, H02.
ALL OTHER METAL PARTS-BRASS, ASTM-B16, C36000, H02.
5. FINISHES:
CENTER CONTACT-GOLD PLATE, ASTM-B488
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE -75 OHMS
FREQUENCY RANGE-DC TO 500 MHZ
WORKING VOLTAGE-500 VRMS

SD

REVISIONS

ISSUE	CHANGES	
0	ER 39506	DCT 6/27/6

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

MID SIZE
PATCH PLUG

DRAWN DCT DATE 6/27/6

DESIGN DCT DATE 6/27/6

APPR. DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7410-16