

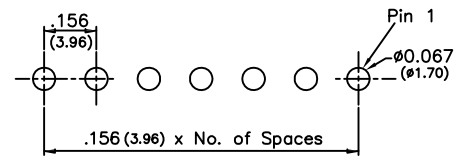
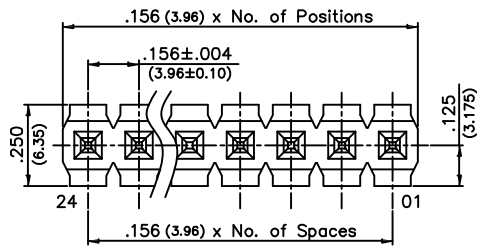


Major League Electronics .156 cl Terminal Strip Elevated Header - Straight

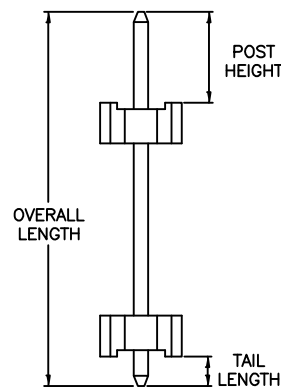

Recommended P.C. Board Layout

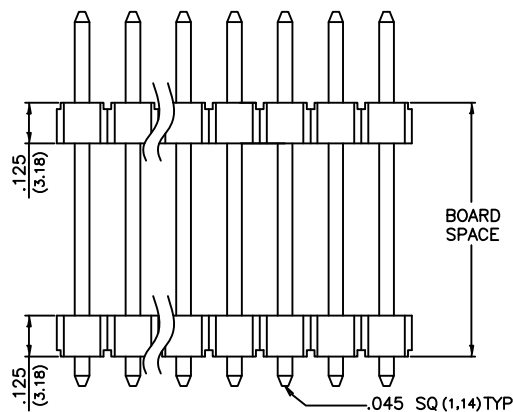

$$\text{Length (L)} - \text{Board Space (B)} - \text{Tail Length (T)} = \text{Post Height (P)}$$

Tails may be clipped to achieve desired pin length

Ordering Information

PC156BS - S - - - T - - LF

Pins Per Row
02 - 24

Row Specification
S = Single Row

Desired Tail Length
Please specify
e.g. .100 (2.54) = 100

Lead Free

Desired Board Space
Please specify
e.g. .100 (2.54) = 100

Plating Options

T Matte Tin All Over

Pin Options		
Overall Length		
.580	14.76mm	04
.674	17.15mm	06
.808	20.55mm	08
1.148	29.20mm	14

Specifications

Current Rating: 7.9 Ampere

Insulation Resistance: 5000MΩ Min.

Dielectric Withstanding: 1500V AC/DC

Contact Resistance: 20 mΩ Max.

Operating Temperature: -55°C to + 105°C

Max. Process Temperature:

IR Reflow: 280°C up to 10 secs.

Wave: 250°C up to 10 secs.


Manual Solder: 380°C up to 5 secs.

Materials

Contact Material: Phosphor Bronze

Insulator Material: LCP, UL94V-0

Plating: Matte Tin over 50µ" (1.27) Ni

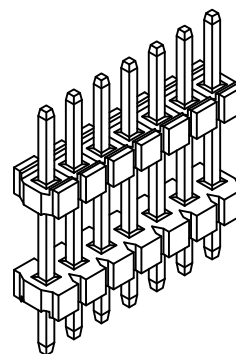

Mates with:
PC156S-XX-S-02
PC156S-XX-S-04

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

NO PLACE DECIMALS ±0.30
ONE PLACE DECIMALS ±0.20
TWO PLACE DECIMALS ±0.15
THREE PLACE DECIMALS ±0.10

ANGLES

NO PLACE DECIMALS ±4.0°
ONE PLACE DECIMALS ±3.0°
TWO PLACE DECIMALS ±2.0°
THREE PLACE DECIMALS ±1.0°

PC156BS SERIES

.156cl Single Row - Straight, Elevated
Thru Hole Terminal Strip Header - Custom

16 APR 09

Scale
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244

Fax: 812-944-7268

E-mail: mle@mlelectronics.com

Web: www.mlelectronics.com

Edition
1

Sheet
1/1