


1. Mechanical Dimensions:

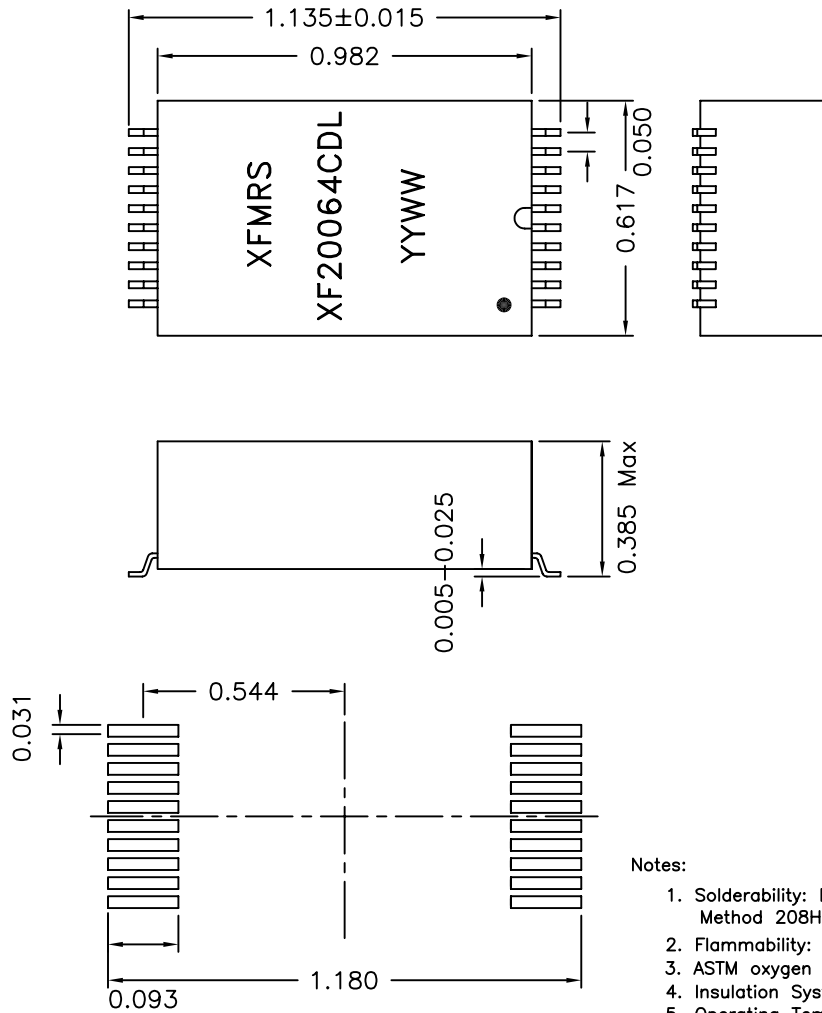


RECOMMENDED PCB LAYOUT

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004" (0.102mm)
9. Moisture Sensitivity: Level 3
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

DOC REV: A/2

2. Schematic:

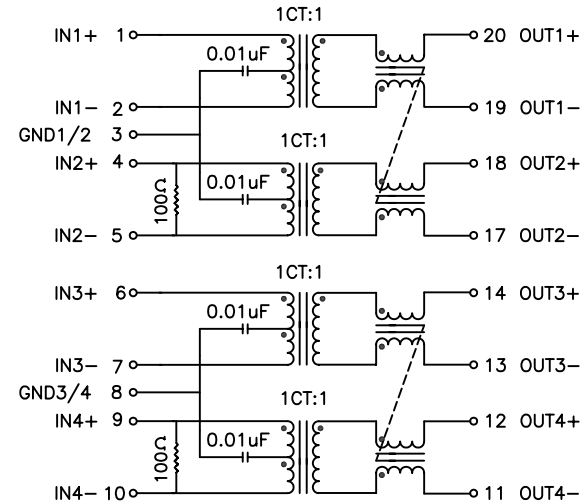

3. Electrical Specifications: @25°C

OCL: 200uH Min @100KHz 50mv
 PRI LL: 0.3uH Max @100KHz 50mV, Short SEC
 CW/W: 20pF Max @100KHz 50mV
 DCR: 0.900 Ohms Max
 HIPOT: 1500Vac

XFMR5 Inc www.XFMR5.com	Title:	
	10BASE-T TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED	P/N: XF20064CDL	REV. A
TOLERANCES: .xxx ±0.010	DWN. 廖玉坤	Nov-03-05
Dimensions in Inch	CHK. 李清儿	Nov-03-05
SCALE 1.5:1 SHT 1 OF 1	APP. Isaiah M	Nov-03-05