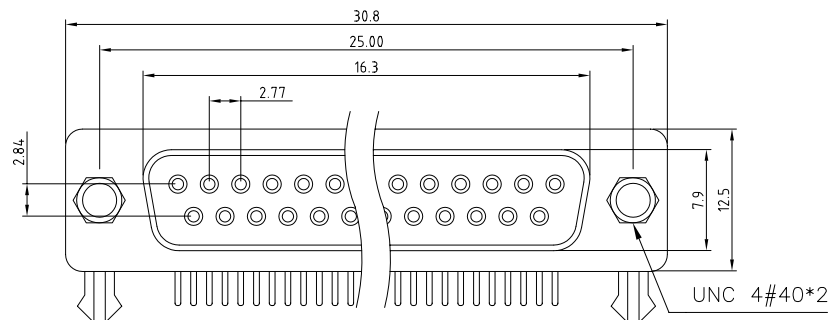


RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

used for:

SPECIFICATIONS

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact Area: Gold Flash

Solder Tails Area: 100u" Tin/Lead Free

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating: 3 Amps

Contact Resistance: 15 mohms

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Operating Temperature: -55°C TO $+105^{\circ}\text{C}$

Directive 2002/95/EC
„RoHS“
Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION DO NOT ALTER CAD DRAWING BY HAND	tolerance unless otherwise specified tolerance shall be as follow Decimtal: .x ± 0.5 .xx ± 0.3 .xxx ± 0.2 Angles: $\pm 5^{\circ}$				finish		 Dim. in mm	scale:		
					2006	date		material: SEE SPECIFICATIONS		
					draw.	Nov. 23	name		title: D-Sub R/A 9.4mm 9pin female connector	
					appd.	Nov. 23	R. Santangelo			
					norm					
					d-old			ROHS compliant		
							drawing no.:		AutoCAD 2005	DIN A3
	a	origin					16K1A1631		sheet 1/1	
	rev.	description	date	name			part no.: DLS1XS6AK44X			

CONEC

16K1A1631

part no.: DLS1XS6AK44X