









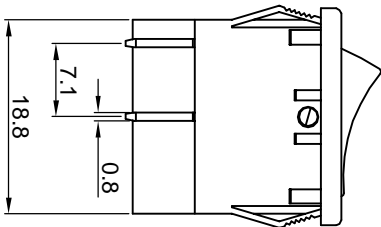
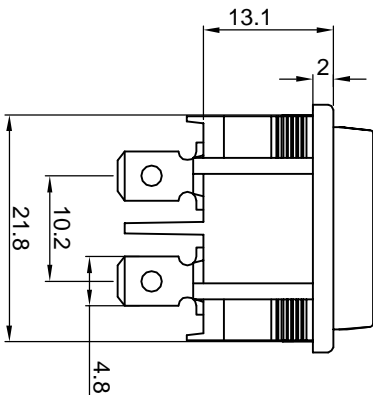
东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD





MR-4



Rating: 10A 125V AC,6A 250V AC (UL CUL )  US  
 6A 250V AC ( VDE CQC CB )    
 Contact Resistance: 50mΩ Max  
 Insulation Resistance: DC 500V 100M Ω Min  
 Dielectric Strength: AC1500V 1 minute  
 Electrical life: 10,000 cycles  
 Operating Temperature: 0°C~85°C



CUT-OUT


	X	Y
	19.2-0.1	21.8-21.9
	19.4-0.1	21.8-21.9
	19.8-0.1	21.8-21.9















MATERIAL:

Body:Nylon66, UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated



Marking	X	0	1	2	3	4	5	7	8	9
None										
		ON	OFF					Front/前进 Back/后退	Front Back	开 关

公差 TOLERANCES .X± 0.3 .XX± 0.15 角度 ANGLE ± 1° 单位 DIMENSION UNIT mm.

版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	版本 VERSION	比例尺 SCALE	核对 CHECKED BY	日期 DATE	绘图 DRAWN BY	品名 TITLE	图号 DRAWING NO
A1	重新整理后发行	2014.07.15	N/A		A1	NONE		2014.07.15		MR-4-210-CXL-BR	MR-4-210-CXL-BR_A1

File Code: HJ-WI-E-03A