



DESCRIPTION : 10W 4KVAC Isolation Wide Input AC/DC Converters

The rated output power of TP10AC series is 10W, With very low no-load consumption (only 60mW), Low leakage current(only 0.1mA),ultra-small size, (50.8*25.4*15.3mm) ,isolated voltage up to 4KVAC. Product safe and reliable,Good EMC performance,EMC And meet the safety specifications of IEC/EN61000-4,CISPR22/EN55022,UL60950/EN60950/EN60601,etc.

Widely used in medical, industrial, office and civil industries, if applied to the bad electromagnetic compatibility must refer to the application circuit

FEATURES

Universal input voltage range	AC and DC dual-use	Wide input voltage: 4:1
Low power consumption	High efficiency,high power density, ultra-small size	Over current protection, Short circuit protection
Low Ripple & Noise	RoHS compliant	Operating temperature: -40℃ to70℃

SELECTION GUIDE

Part Number	Input Voltage		Output		Efficiency (typ.) %
	VAC	VDC	Voltage (VDC)	Current (A)	
TP10AC220S03W	85-305	120-370	3.3	2.00	66
TP10AC220S05W	85-305	120-370	5	2.00	78
TP10AC220S09W	85-305	120-370	9	1.05	80
TP10AC220S12W	85-305	120-370	12	0.83	81
TP10AC220S15W	85-305	120-370	15	0.66	82
TP10AC220S24W	85-305	120-370	24	0.42	83

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

INPUT CHARACTERISTICS

Parameter	Conditions	Mini.	Typ.	Max.	Units
Voltage range	DC Input	120	220	370	VDC
Voltage range	AC Input	85	220	305	VAC
Input frequency		50		60	HZ
Input Current	115VAC			210	mA
Input Current	230VAC			100	mA
Inrush current	115VAC		16		A
Inrush current	230VAC		30		A
External fuse recommended value		1A/250V, slow fusing, necessary			
Hot plug		Unavailable			
Leakage current	265VAC/50Hz		<0.1		mA

OUTPUT CHARACTERISTICS

Parameter	Conditions	Mini.	Typ.	Max.	Units
Output voltage accuracy				±2	%
Line regulation				±1	%
Load regulation				±1	%
Short-circuit protection	Overvoltage, overcurrent, short circuit protection,self-recovery				
Ripple & Noise	20MHz bandwidth (peak-peak value)		50	100	mv
Temperature Coefficient			±0.03		%/℃
Start rising time	115VAC Input while full-load		200		ms
Start rising time	230VAC Input while full-load		100		ms
Output hold time	115VAC Input while full-load		15		ms
Output hold time	230VAC Input while full-load		40		ms

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Mini.	Typ.	Max.	Units
Isolation voltage	Tested for 1 min.	4000			VAC
Operating Temperature	According to the output load derating curve	-40		+70	℃
Storage Temperature		-40		+85	℃
Storage Humidity		10		95	% .RH max

Case temperature shall not exceed the maximum case temperature


SAFETY & ELECTROMAGNETIC COMPATIBILITY

Safe standard	UL1012,EN60950,EN60601,UL60950,UL60601
Isolated voltage	I/P-O/P:4000VAC
Isolation resistance	I/P-O/P>100M Ohms/500VDC 25℃ 70% RH
Conduction and radiation	EN55011, EN55022 (CISPR22) CLASS B
Electrostatic discharge(ESD)	IEC/EN 61000-4-2 level 4 8kV/15kV
Rf radiation immunity (RF)	IEC/EN 61000-4-3
EFT	IEC/EN 61000-4-4 level 4 4kV (Note: see application circuit for details)
Surge	IEC/EN 61000-4-5 level 4 2kV (Note: see application circuit for details)
MTBF	200K hrs min. MIL-HDBK-217F(25)


NOTES

- 1.The above data, except for special instructions, are measured at TA = 25℃, humidity <75%, input nominal voltage 230Vac and output rated load
- 2.Ripple and noise are measured according to the application circuit of this manual, using a 300mm twisted pair and in the case of a bandwidth of 20MHz
- 3.The parts in the system is considered as a component, need to combine the terminal equipment for electromagnetic compatibility related confirmation.

PRODUCT SCHEMATIC

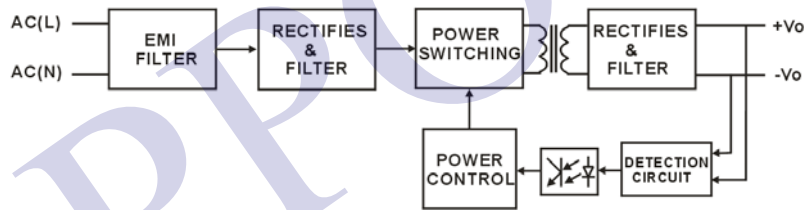

DERATING CURVE

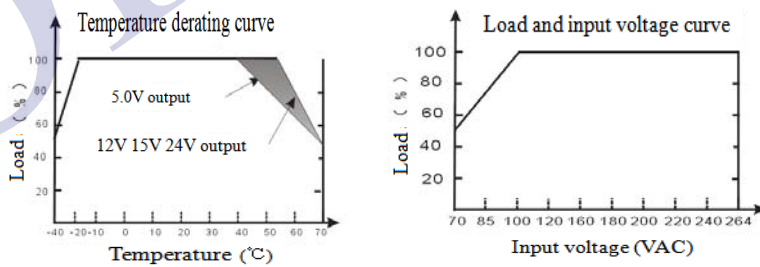

TYPICAL APPLICATION CIRCUIT

