PCB terminal block - ZFKDS 1,5C-5,0-EX - 1732111

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)



PCB terminal block, Nominal current (Ex): 16 A, Nominal voltage (Ex): 176 V, Pitch: 5 mm, Number of positions: 1, Connection method: Spring-cage connection, Mounting: Soldering, Color: green

Product Features

- Desk shape with a clear delimitation of the conductor entry and the actuation opening (screwdriver shaft)
- Compact housing dimensions
- Modular design enables blocking for larger numbers of positions
- Two solder pins for a high level of stability on the PCB
- PCB single terminal block with spring-cage connection

Key commercial data

Packing unit	1 pc
Minimum order quantity	50 pc
Weight per Piece (excluding packing)	1.0 GRM
Custom tariff number	85369010
Country of origin	Poland

Technical data

Dimensions

Pitch	5 mm
Pin dimensions	0,7 x 0,7
Pin spacing	5.08 mm
Hole diameter	1.1 mm

General

Range of articles	ZFKDS(A) 1,5C-EX
Insulating material group	I
Nominal cross section	1.5 mm²

PCB terminal block - ZFKDS 1,5C-5,0-EX - 1732111

Technical data

General

Insulating material	PA
Solder pin surface	Sn
Inflammability class according to UL 94	V0
Number of positions	1

Classifications

eCl@ss

eCl@ss 4.0	27141111
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002643


UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432


Drawings

PCB terminal block - ZFKDS 1,5C-5,0-EX - 1732111

Drilling diagram



Dimensioned drawing

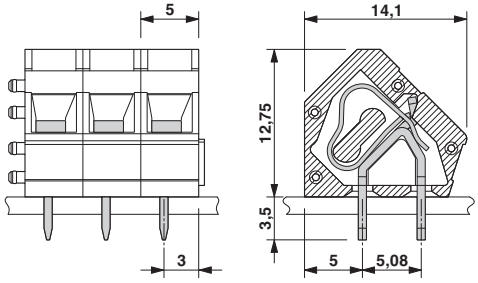

Phoenix Contact 2014 © - all rights reserved
http://www.phoenixcontact.com