



7/16 DIN Male to 7/16 DIN Female LSZH Jacketed Low PIM
Cable 200 CM Length Using SR401FLJ Low PIM Coax, RoHS

TECHNICAL DATA SHEET

PE3C2015-200CM

Configuration

Connector 1	7/16 DIN Male
Connector 2	7/16 DIN Female
Cable Type	PE-SR401FLJ Low PIM

Electrical Specifications

Frequency Range	DC to 3 GHz
Impedance	50 Ohms
Maximum VSWR	1.15:1
RF Shielding	-100 dB
Maximum Input Power	2 KWatts
Passive Intermodulation	-160 dBc

Typical Performance by Frequency

Frequency 1

Frequency	500 MHz
Insertion Loss,	0.3 dB
Power Handling, KWatts	2

Frequency 2

Frequency	1000 MHz
Insertion Loss	0.525 dB
Power Handling	1.5 KWatts

Frequency 3

Frequency	3 GHz
Insertion Loss	0.918 dB
Power Handling	950 Watts

Mechanical Specifications

Temperature

Temperature Operating Range	-55 to +125 deg C
-----------------------------	-------------------

Size

Length	78.74 in [200 cm]
One Time Minimum Bend Radius	5 in [127 mm]

Cable

Cable Type	PE-SR401FLJ Low PIM
Cable Inner Conductor	Copper, Silver
Cable Outer Conductor	Copper, Tin
Dielectric Type	PTFE
Jacket Material	PVC LSZH
Jacket Diameter	0.276 in [7.01 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Female LSZH Jacketed Low PIM Cable 200 CM Length Using SR401FLJ Low PIM Coax, RoHS PE3C2015-200CM](#)





7/16 DIN Male to 7/16 DIN Female LSZH Jacketed Low PIM
Cable 200 CM Length Using SR401FLJ Low PIM Coax, RoHS

TECHNICAL DATA SHEET

PE3C2015-200CM

Connector 1

Type	7/16 DIN Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Silver
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size	3/4 inch
Body Material and Plating	Brass, Silver
Dielectric Type	PTFE

Connector 2

Type	7/16 DIN Female
Configuration	Straight
Inner Conductor Material and Plating	Beryllium Copper, Silver
Body Material and Plating	Brass, Silver
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
Notes:	
• Values at +25 °C, sea level	

7/16 DIN Male to 7/16 DIN Female LSZH Jacketed Low PIM Cable 200 CM Length Using SR401FLJ Low PIM Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Female LSZH Jacketed Low PIM Cable 200 CM Length Using SR401FLJ Low PIM Coax, RoHS PE3C2015-200CM](http://www.pasternack.com/7-16-male-7-16-female-sr401flj-low-pim-cable-assembly-pe3c2015-200cm-p.aspx)

URL: <http://www.pasternack.com/7-16-male-7-16-female-sr401flj-low-pim-cable-assembly-pe3c2015-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2015-200CM CAD Drawing

7/16 DIN Male to 7/16 DIN Female LSZH Jacketed Low PIM Cable
200 CM Length Using SR401FLJ Low PIM Coax, RoHS

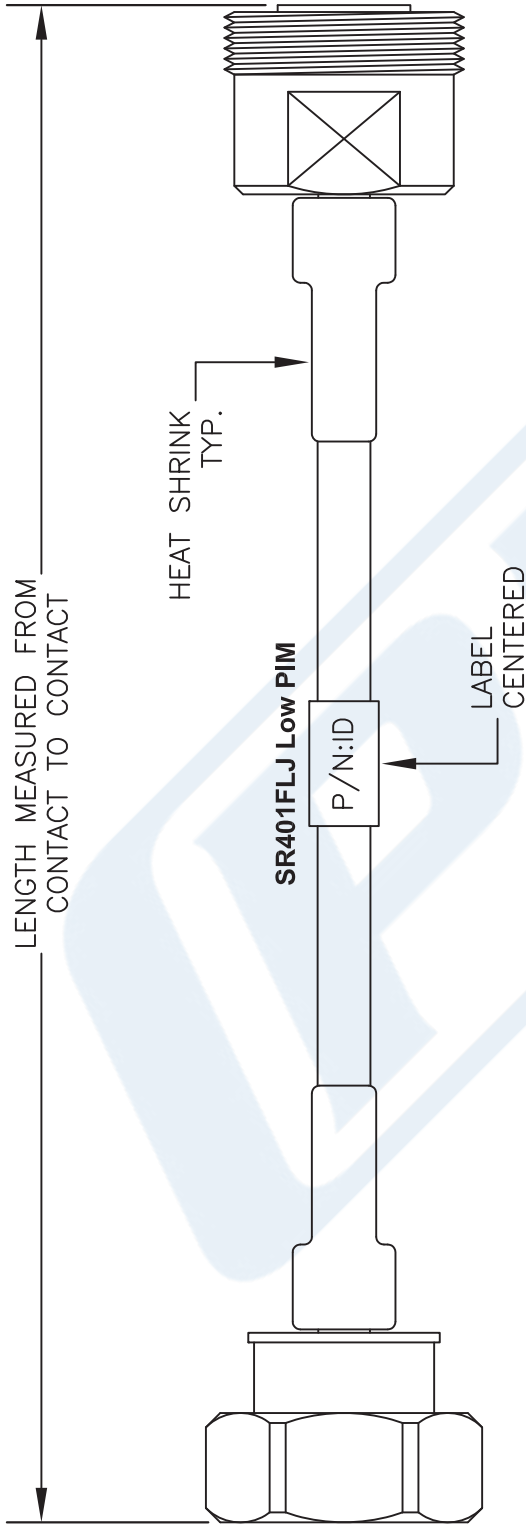

7/16 DIN
MALE

7/16 DIN
FEMALE

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration PE3 <input type="text" value="zzz"/> <input type="text" value="yy"/> <input type="text" value="xx"/> <input type="text" value="uu"/> 00 - 99999 LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables		-12	12"	-25CM	25Cm
Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM		-24	24"	-50CM	50Cm
CM = Centimeters < Blank > = Inches _____ Length		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-XX	Custom Length	-XXCM	Custom Length

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE3C2015

PE PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE 050514 SCALE N/A SIZE A 2233

FSCM NO. 53919

FSCM NO. 53919