File Number **1563**

IRFF120, IRFF121, IRFF122, IRFF123

Power MOS Field-Effect Transistors

N-Channel Enhancement-Mode Power Field-Effect Transistors

5.0A and 6.0A, 60V-100V


$r_{DS}(on)$ = 0.30 Ω and 0.40 Ω

Features:
- *SOA is power-dissipation limited*
- *Nanosecond switching speeds*
- *Linear transfer characteristics*
- *High input impedance*
- *Majority carrier device*

The IRFF120, IRFF121, IRFF122 and IRFF123 are n-channel enhancement-mode silicon-gate power field-effect transistors designed for applications such as switching regulators, switching converters, motor drivers, relay drivers, and drivers for high-power bipolar switching transistors requiring high speed and low gate-drive power. These types can be operated directly from integrated circuits.

The IRFF-types are supplied in the JEDEC TO-205AF **(LOW-PROFILE TO-39)** metal package.


N-CHANNEL ENHANCEMENT MODE



92CS-33741

TERMINAL DIAGRAM

TERMINAL DESIGNATION



92CS-37555

JEDEC TO-205AF

Absolute Maximum Ratings


	Parameter	IRFF120	IRFF121	IRFF122	IRFF123	Units
V_{DS}	Drain - Source Voltage ①	100	60	100	60	V
V_{DGR}	Drain - Gate Voltage (R_{GS} = 20 KΩ)* ①	100	60	100	60	V
I_D @ T_C = 25°C	Continuous Drain Current	6.0	6.0	5.0	5.0	A
I_{DM}	Pulsed Drain Current ③	24	24	20	20	A
V_{GS}	Gate - Source Voltage	±20				V
P_D @ T_C = 25°C	Max. Power Dissipation	20 (See Fig. 14)				W
	Linear Derating Factor	0.16 (See Fig. 14)				W/°C
I_{LM}	Inductive Current, Clamped	(See Fig. 15 and 16) L = 100μH				A
		24	24	20	20	
T_J T_{stg}	Operating Junction and Storage Temperature Range	-55 to 150				°C
	Lead Temperature	300 (0.063 in. (1.6mm) from case for 10s)				°C

IRFF120, IRFF121, IRFF122, IRFF123

Electrical Characteristics @T_C = 25°C (Unless Otherwise Specified)

Parameter		Type	Min	Typ	Max	Units	Test Conditions
BV_{DSS}	Drain - Source Breakdown Voltage	IRFF120 IRFF122	100	–	–	V	V_{GS} = 0V
		IRFF121 IRFF123	60	–	–	V	I_D = 250μA
$V_{GS(th)}$	Gate Threshold Voltage	ALL	2.0	–	4.0	V	V_{DS} = V_{GS}, I_D = 250μA
I_{GSS}	Gate-Source Leakage Forward	ALL	–	–	100	nA	V_{GS} = 20V
I_{GSS}	Gate Source Leakage Reverse	ALL	–	–	-100	nA	V_{GS} = -20V
I_{DSS}	Zero Gate Voltage Drain Current	ALL	–	–	250	μA	V_{DS} = Max. Rating, V_{GS} = 0V
			–	–	1000	μA	V_{DS} = Max Rating x 0.8, V_{GS} = 0V, T_C = 125°C
$I_{D(on)}$	On-State Drain Current ②	IRFF120 IRFF121	6.0	–	–	A	V_{DS} > $I_{D(on)}$ x $R_{DS(on)}$ max., V_{GS} = 10V
		IRFF122 IRFF123	5.0	–	–	A	
$R_{DS(on)}$	Static Drain Source On-State Resistance ②	IRFF120 IRFF121	–	0.25	0.30	Ω	V_{GS} = 10V, I_D = 3.0A
		IRFF122 IRFF123	–	0.30	0.40	Ω	
g_{fs}	Forward Transconductance ②	ALL	1.5	2.9	–	S (℧)	V_{DS} > $I_{D(on)}$ x $R_{DS(on)}$ max., I_D = 3.0A
C_{iss}	Input Capacitance	ALL	–	450	600	pF	V_{GS} = 0V, V_{DS} = 25V, f = 1.0 MHz See Fig. 10
C_{oss}	Output Capacitance	ALL	–	200	400	pF	
C_{rss}	Reverse Transfer Capacitance	ALL	–	50	100	pF	
$t_{d(on)}$	Turn On Delay Time	ALL	–	20	40	ns	V_{DD} ≈ 0.5 BV_{DSS}, I_D = 3.0A, Z_o = 50Ω See Fig. 17 (MOSFET switching times are essentially independent of operating temperature.)
t_r	Rise Time	ALL	–	37	70	ns	
$t_{d(off)}$	Turn-Off Delay Time	ALL	–	50	100	ns	
t_f	Fall Time	ALL	–	35	70	ns	
Q_g	Total Gate Charge (Gate-Source Plus Gate-Drain)	ALL	–	10	15	nC	V_{GS} = 10V, I_D = 10A, V_{DS} = 0.8 Max. Rating See Fig. 18 for test circuit. (Gate charge is essentially independent of operating temperature.)
Q_{gs}	Gate Source Charge	ALL	–	6.0	–	nC	
Q_{gd}	Gate Drain ("Miller") Charge	ALL	–	4.0	–	nC	
L_D	Internal Drain Inductance	ALL	–	5.0	–	nH	Measured from the drain lead, 5 mm (0.2 in.) from header to center of die
L_S	Internal Source Inductance	ALL	–	15	–	nH	Measured from the source lead, 5mm (0.2 in.) from header to source bonding pad

Modified MOSFET symbol showing the internal device inductances



Thermal Resistance

R_{thJC}	Junction-to Case	ALL	–	–	6.25	°C/W	
R_{thJA}	Junction-to Ambient	ALL	–	–	175	°C/W	Free Air Operation

Source-Drain Diode Ratings and Characteristics

I_S	Continuous Source Current (Body Diode)	IRFF120 IRFF121	–	–	6.0	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier
		IRFF122 IRFF123	–	–	5.0	A	
I_{SM}	Pulse Source Current (Body Diode) ③	IRFF120 IRFF121	–	–	24	A	
		IRFF122 IRFF123	–	–	20	A	
V_{SD}	Diode Forward Voltage ②	IRFF120 IRFF121	–	–	2.5	V	T_C = 25°C, I_S = 6.0A, V_{GS} = 0V
		IRFF122 IRFF123	–	–	2.3	V	T_C = 25°C, I_S = 5.0A, V_{GS} = 0V
t_{rr}	Reverse Recovery Time	ALL	–	230	–	ns	T_J = 150°C, I_F = 6.0A, dI_F/dt = 100A/μs
Q_{RR}	Reverse Recovered Charge	ALL	–	1.2	–	μC	T_J = 150°C, I_F = 6.0A, dI_F/dt = 100A/μs
t_{on}	Forward Turn on Time	ALL	Intrinsic turn on time is negligible. Turn on speed is substantially controlled by L_S + L_D				



①T_J = 25°C to 150°C. ②Pulse Test: Pulse width ≤ 300μs, Duty Cycle ≤ 2%

③ Repetitive Rating: Pulse width limited by max. junction temperature. See Transient Thermal Impedance Curve (Fig. 5).

IRFF120, IRFF121, IRFF122, IRFF123




Fig. 1 – Typical Output Characteristics




Fig. 2 – Typical Transfer Characteristics




Fig. 3 – Typical Saturation Characteristics

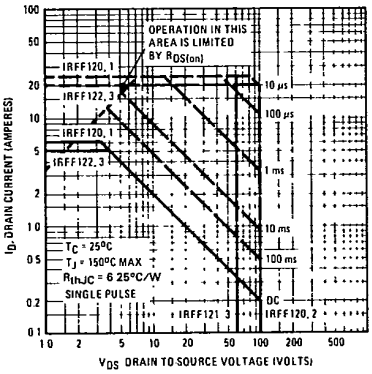


Fig. 4 – Maximum Safe Operating Area

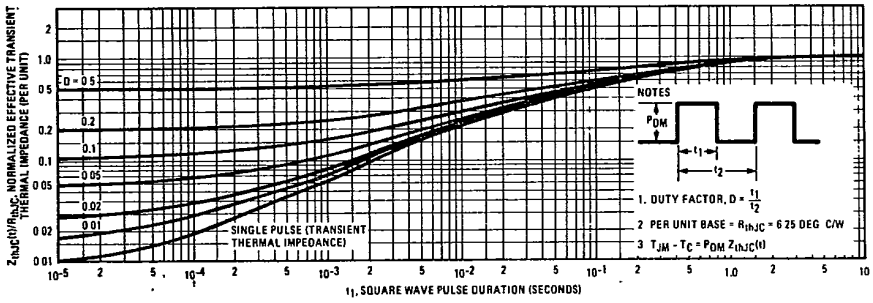


Fig. 5 – Maximum Effective Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

IRFF120, IRFF121, IRFF122, IRFF123




Fig. 6 – Typical Transconductance Vs. Drain Current

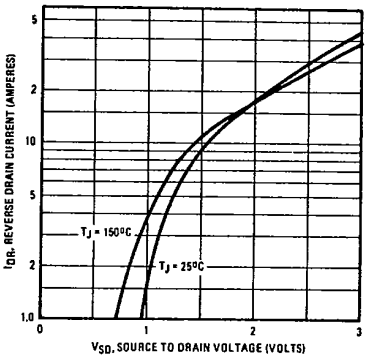


Fig. 7 – Typical Source-Drain Diode Forward Voltage

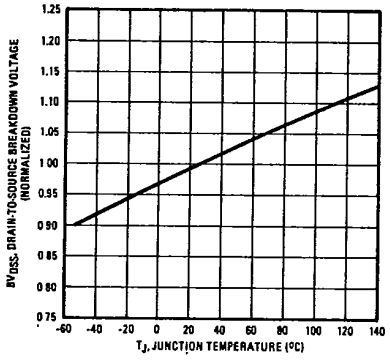


Fig. 8 – Breakdown Voltage Vs. Temperature

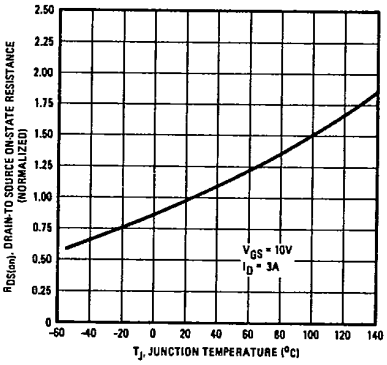


Fig. 9 – Normalized On-Resistance Vs. Temperature

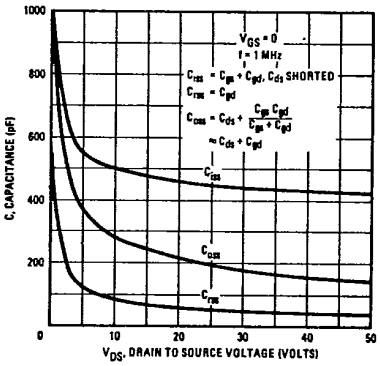


Fig. 10 – Typical Capacitance Vs. Drain-to-Source Voltage

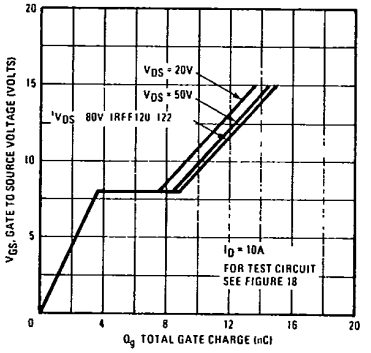


Fig. 11 – Typical Gate Charge Vs. Gate-to-Source Voltage

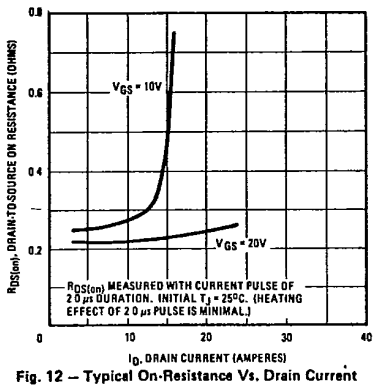


Fig. 12 – Typical On-Resistance Vs. Drain Current

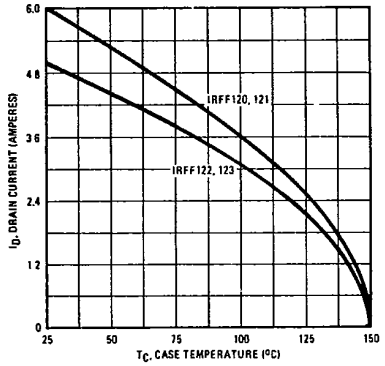


Fig. 13 – Maximum Drain Current Vs. Case Temperature

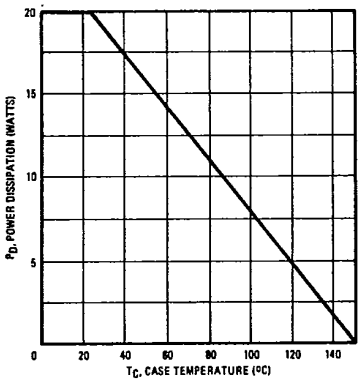


Fig. 14 – Power Vs. Temperature Derating Curve




Fig. 15 – Clamped Inductive Test Circuit




Fig. 16 – Clamped Inductive Waveforms

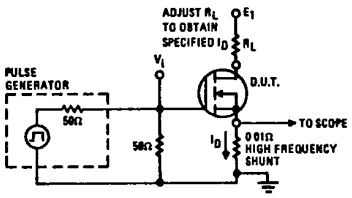


Fig. 17 – Switching Time Test Circuit

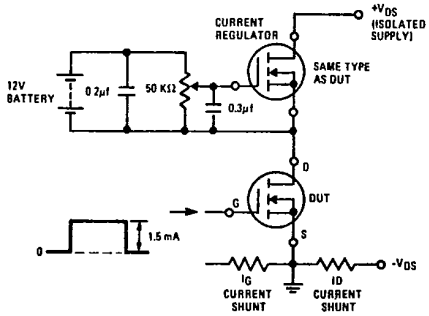


Fig. 18 – Gate Charge Test Circuit