
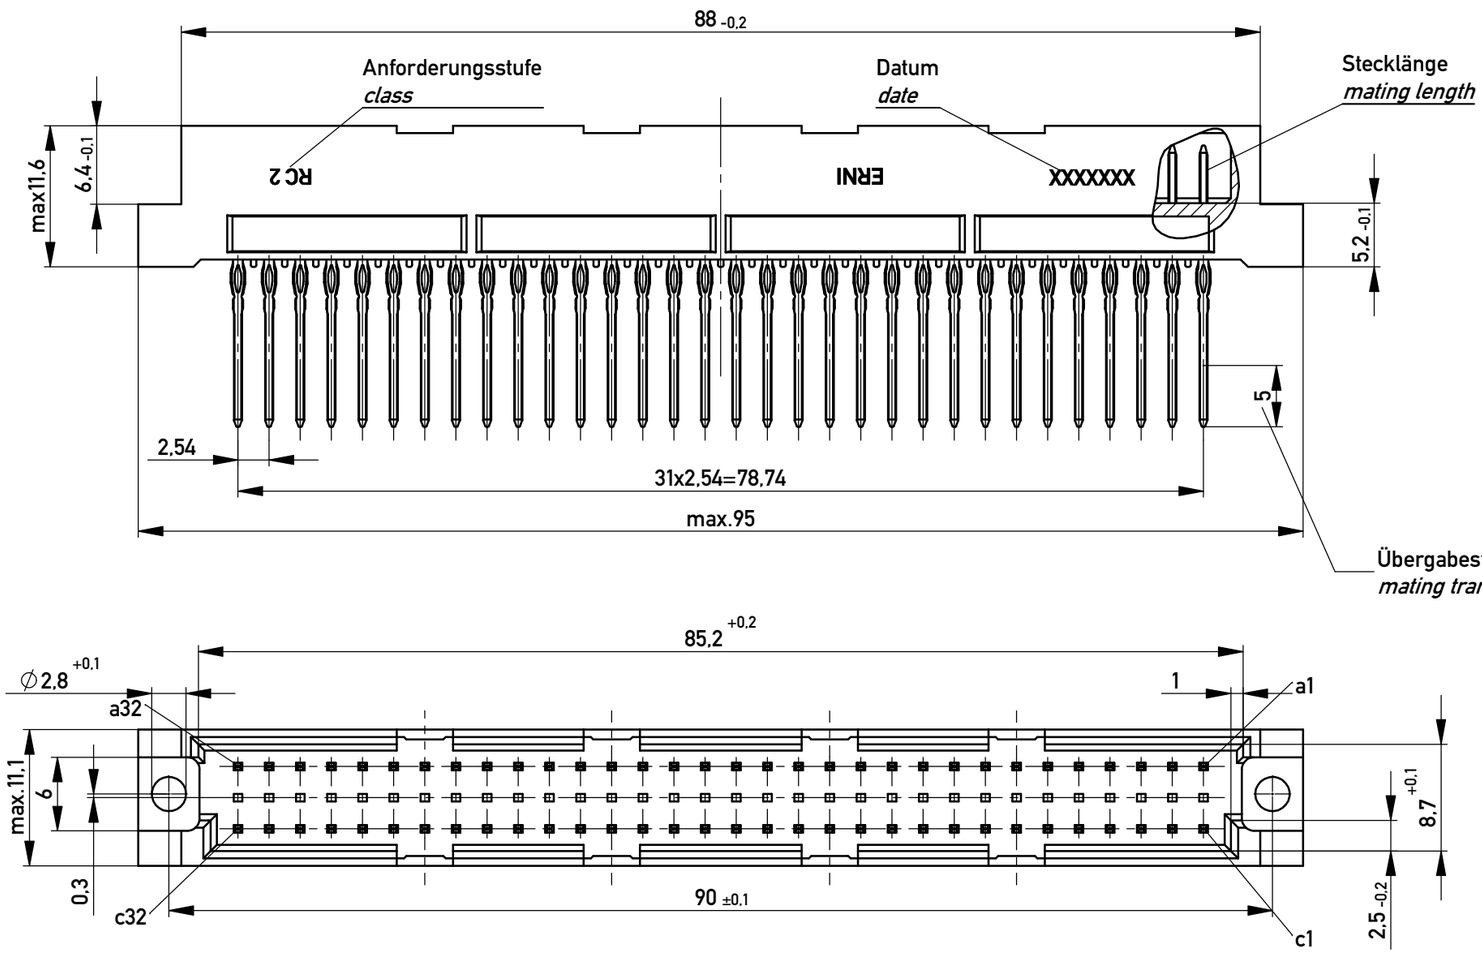
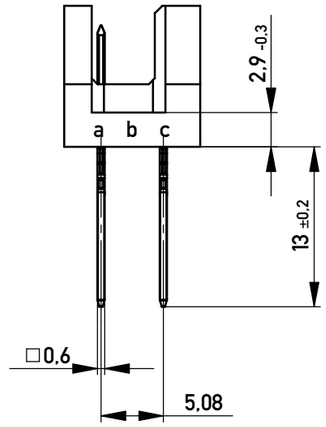
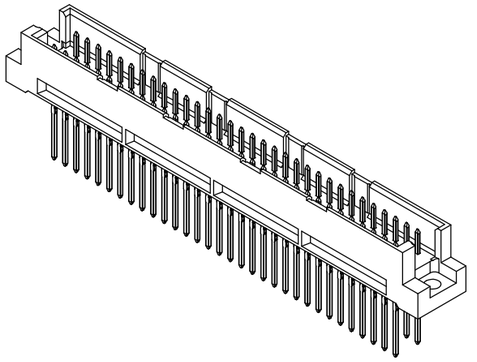


Stecklänge / mating length





E = *early mate, late break* / voreilend

S = standard


L = late mate, early break / nacheilend




Bestückungsplan / *contact layout*

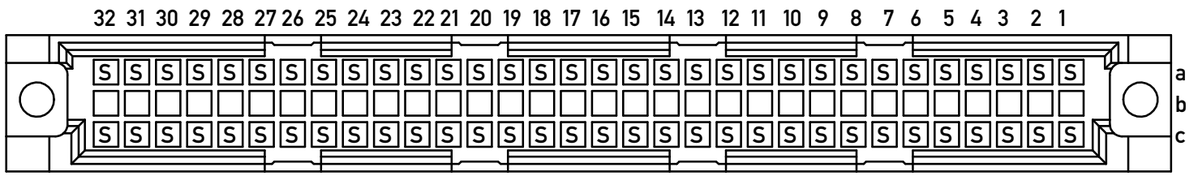


Leiterplatten-lochbild / *PCB drillhole pattern*

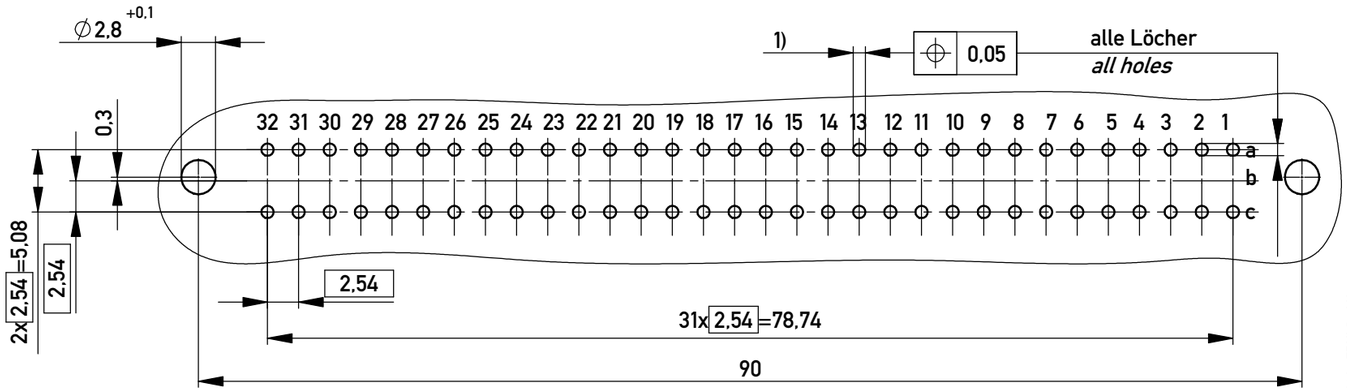


Elastische Einpresszone mit Übergabesteckzone /
*compliant pressfit zone with mating transfer zone*
Isolierwerkstoff / *housing material* : PBT GF 30
Bauart 4 / *type 4*
Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*
Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
*Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2*
Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
*diameter of drilled hole see drawing 114124*

1) $\oslash 1{,}0^{+0{,}09}_{-0{,}06}$ Durchmesser des metallisierten Loches

$\oslash 1{,}0^{+0{,}09}_{-0{,}06}$ *Diameter of finished plated-through hole*

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

| | | | |
|---|---|---|---|
| Information: | Tolerances / All Dimensions in mm | Scale 2:1 | |
| All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | Subject to modification without prior notice. Drawing will not be updated. | Designation: Messerleiste R 64 EE / *Male Connector R 64 Pressfit* | |
| Index / Date | ERNI www.ERNI.com | 100403210042 | I / A3 |
| | | Class STVR | |