4804.1400

Kabeltülle PG12, Plug, solder terminal, insulated, 7.5 mm, 4-pole, straight, UK-Connector



Description


- Solder terminal :
  for cable mounting
- Data and Signal transfer
- Data and Signal Connectors 4-pole , insulated , straight

Technical Data

Diameter	7.5 mm
Number of Poles	4-pole
Ratings DC	2 A / 12 VDC
Ratings AC	2 A / 12 VAC
Dielectric Strength	1000 VDC
Insulation Resistance	> 10000 MΩ @ 500 VDC
Material: Housing	black

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal
Housings	insulated
Style	straight
Lifetime	50000 Insertions

Dimensions

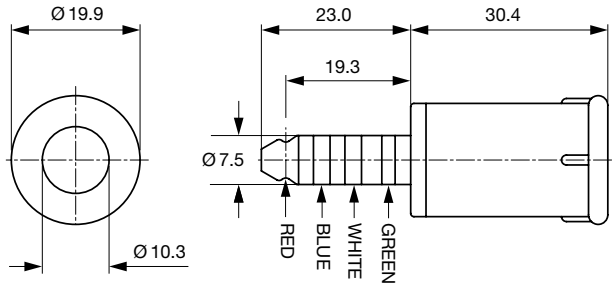

Terminal Identification

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	7.5	4-pole	solder terminal	4804.1400

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging unit

100 Pcs

Accessories

	Description
	4804.0001 Sleeve black, 5.6 mm

Mating Outlets/Connectors

	Category / Description	
	Data and Signal Plug/Socket Overview complete	
	Kabeltülle PG12, Socket, solder terminal, screened, 7.5 mm, 4-pole, straight, UK-Connector	4804.2400
	Kabeltülle PG12, Socket, solder terminal, insulated, 7.5 mm, 4-pole, straight, UK-Connector	4804.2410
	Data and Signal Plug/Socket further types to 4804.1400	

21.11.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.