
NPN Silicon RF Transistor

- For amplifier and oscillator applications in TV-tuners
- Pb-free (RoHS compliant) package

RoHS

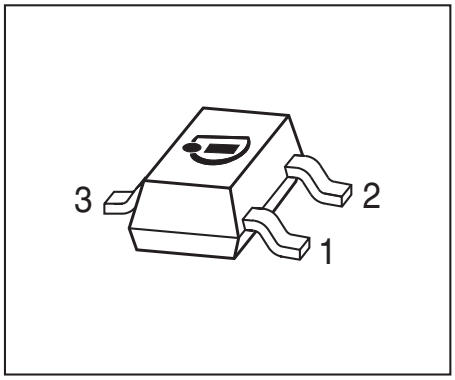

ESD (**E**lectro**s**tatic **d**ischarge) sensitive device, observe handling precaution!

Type	Marking	Pin Configuration			Package
BF517	LRs	1 = B	2 = E	3 = C	SOT23

Maximum Ratings at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	15	V
Collector-base voltage	V_{CBO}	25	
Emitter-base voltage	V_{EBO}	2.5	
Collector current	I_C	25	mA
Peak collector current	I_{CM}	50	
Total power dissipation $T_S \leq 55$ °C	P_{tot}	280	mW
Junction temperature	T_J	150	°C
Ambient temperature	T_A	-65 ... 150	
Storage temperature	T_{Stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point[1)]	R_{thJS}	≤ 340	K/W

[1]For calculation of R_{thJA} please refer to Application Note AN077 (Thermal Resistance Calculation)


Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage I_C = 1 mA, I_B = 0	$V_{(BR)CEO}$	15	-	-	V
Collector-base cutoff current V_{CB} = 10 V, I_E = 0 V_{CB} = 25 V, I_E = 0	I_{CBO}	 - -	 - -	 0.05 10	µA
Emitter-base cutoff current V_{EB} = 2.5 V, I_C = 0	I_{EBO}	-	-	100	nA
DC current gain I_C = 2 mA, V_{CE} = 1 V, pulse measured I_C = 25 mA, V_{CE} = 1 V, pulse measured	h_{FE}	 40 20	 - 70	 150 -	-
Collector-emitter saturation voltage I_C = 10 mA, I_B = 1 mA	V_{CEsat}	-	0.1	0.4	V


Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics (verified by random sampling)					
Transition frequency I_C = 2 mA, V_{CE} = 5 V, f = 200 MHz I_C = 25 mA, V_{CE} = 5 V, f = 200 MHz	f_T	 1 1.3	 1.4 2.5	 - -	GHz
Collector-base capacitance V_{CB} = 5 V, f = 1 MHz, V_{BE} = 0 , emitter grounded	C_{cb}	-	0.55	0.8	pF
Collector emitter capacitance V_{CE} = 5 V, f = 1 MHz, V_{BE} = 0 , base grounded	C_{ce}	-	0.27	-	
Emitter-base capacitance V_{EB} = 0.5 V, f = 1 MHz, V_{CB} = 0 , collector grounded	C_{eb}	-	0.9	1.45	
Minimum noise figure I_C = 2 mA, V_{CE} = 5 V, Z_S = 50 Ω, f = 800 MHz	NF_{min}	-	3.5	5	dB
Transducer gain I_C = 20 mA, V_{CE} = 5 V, Z_S = Z_L = 50Ω, f = 500 MHz	$\lvert S_{21e}\rvert^2$	-	13	-	dB
Third order intercept point at output V_{CE} = 5 V, I_C = 20 mA, f = 800 MHz, Z_S = Z_{Sopt}, Z_L = Z_{Lopt}	IP_3	-	21.5	-	dBm
1dB compression point I_C = 20 mA, V_{CE} = 5 V, Z_S = Z_L = 50Ω, f = 800 MHz	P_{-1dB}	-	10	-	-

Total power dissipation $P_{tot} = f(T_S)$

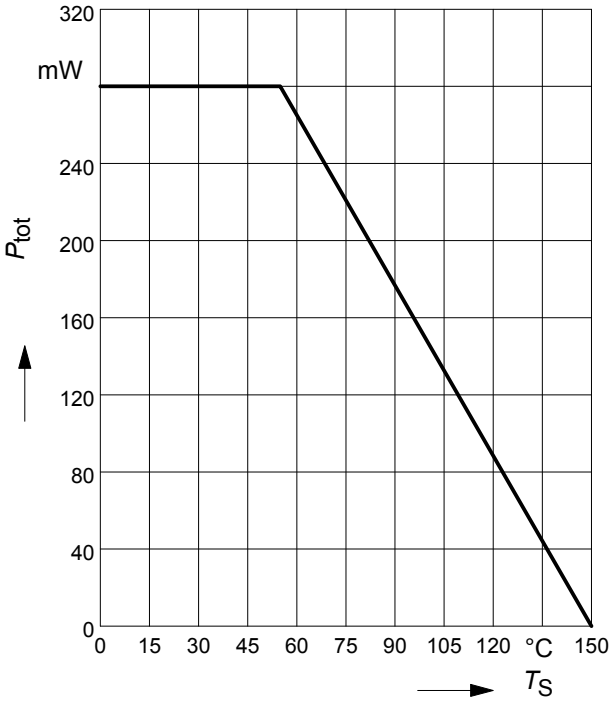


Permissible Pulse Load $R_{thJS} = f(t_p)$

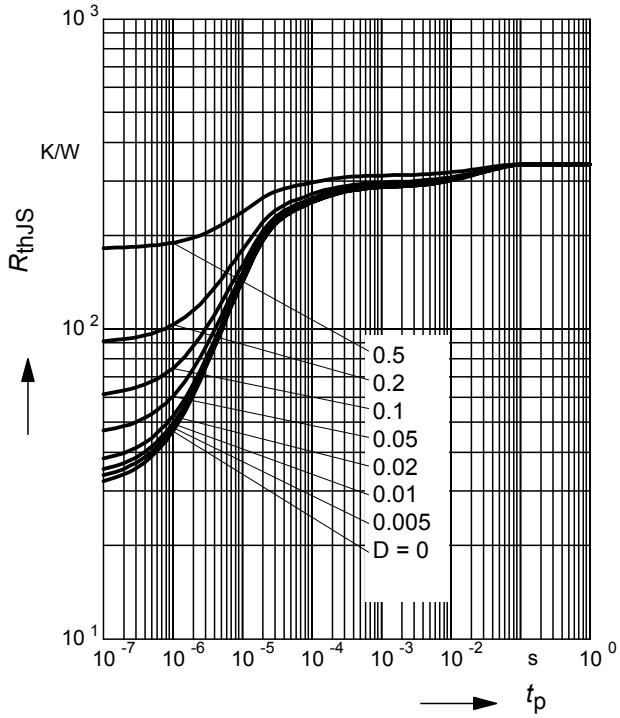

Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

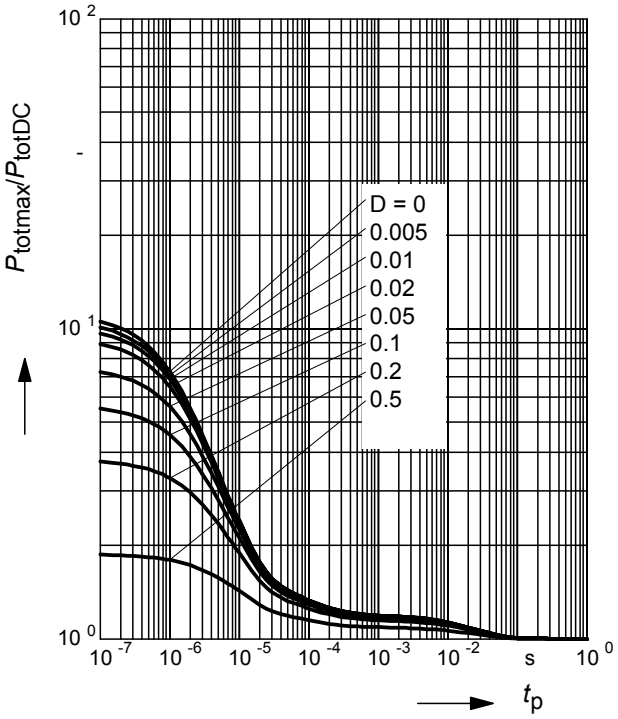

Collector-base capacitance $C_{cb} = f(V_{CB})$


Emitter-base capacitance $C_{eb} = f(V_{EB})$

f = 1 MHz

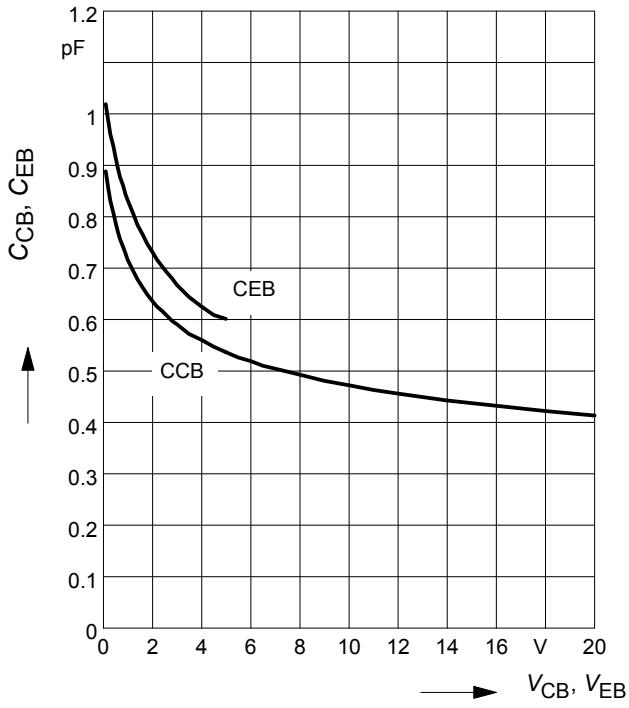


Transition frequency $f_T = f(I_C)$

V_{CE} = parameter

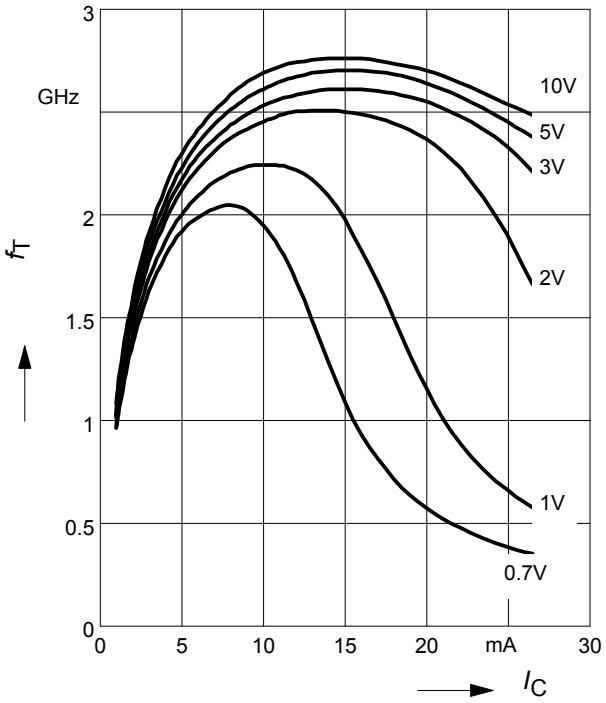


Package Outline



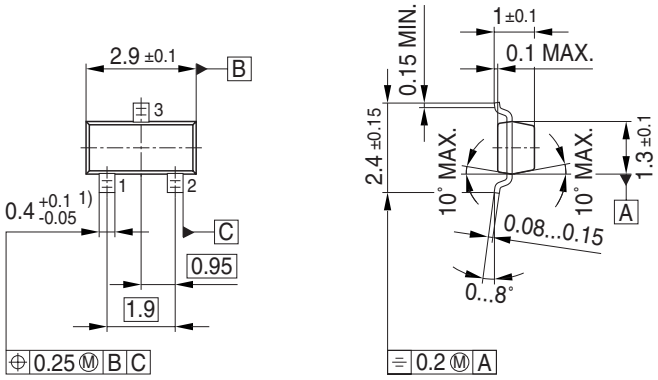


1) Lead width can be 0.6 max. in dambar area

Foot Print




Marking Layout (Example)

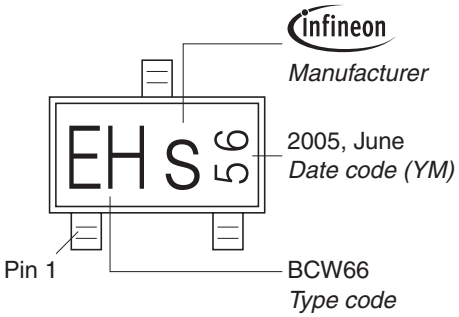

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

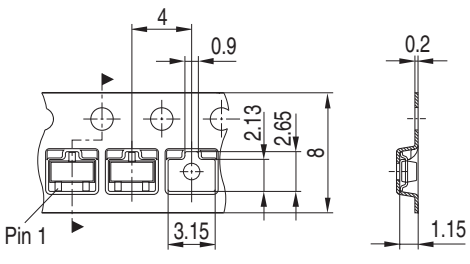

Edition 2009-11-16

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2009 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (<www.infineon.com>).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.