

**BD2378**


Preliminary

DUAL TRANSISTOR**COMPLEMENTARY NPN/PNP
SMALL SIGNAL SURFACE
MOUNT TRANSISTOR****■ DESCRIPTION**

The UTC **BD2378** is a complementary NPN/PNP small signal surface mount transistor. It's suitable for low power amplification and switch.

■ FEATURES

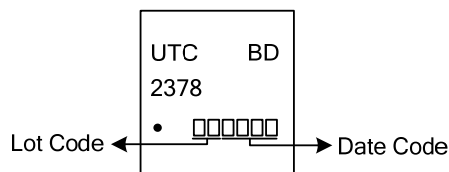
- * Epitaxial Planar Die Construction
- * Extremely-Small Surface Mount Package

■ EQUIVALENT CIRCUIT**■ ORDERING INFORMATION**

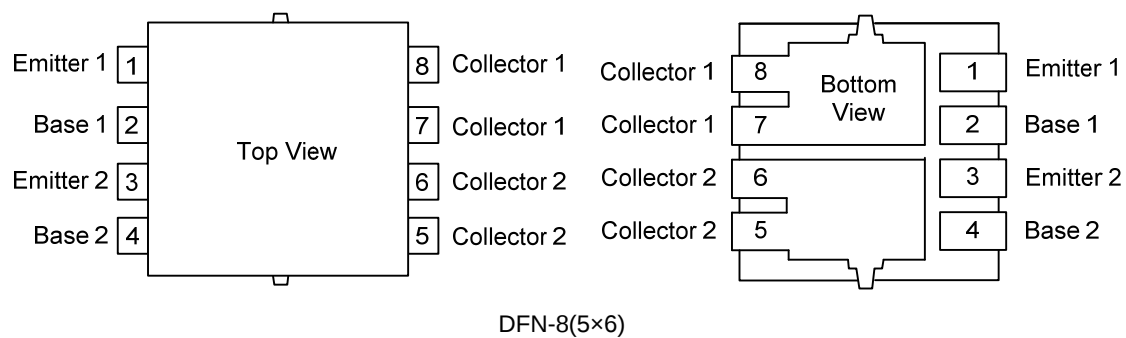
Ordering Number	Package									Packing
		1	2	3	4	5	6	7	8	
BD2378G-K08-5060-R	DFN-8(5×6)	E1	B1	E2	B2	C2	C2	C1	C1	Tape Reel

Note: Pin Assignment: E: Emitter B: Base C: Collector

BD2378G-K08-5060-R	(1) Packing Type	(1) R: Tape Reel
	(2) Package Type	(2) K08-5060: DFN-8(5×6)
	(3) Green Package	(3) G: Halogen Free and Lead Free

■ MARKING

■ PIN CONFIGURATION



■ **ABSOLUTE MAXIMUM RATINGS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified.)

TR1

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	100	V
Collector-Emitter Voltage	V_{CEO}	80	V
Emitter-Base Voltage	V_{EBO}	5	V
Continuous Collector Current	I_C	2	A
Collector Dissipation	P_C	1.25	W
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55~150	$^{\circ}\text{C}$

TR2

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	-100	V
Collector-Emitter Voltage	V_{CEO}	-80	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-2	A
Collector Power Dissipation	P_C	1.25	W
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified.)

TR1

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=1\text{mA}$, $I_E=0$	100			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=100\text{mA}$, $I_B=0$	80			V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E=1\text{mA}$, $I_C=0$	5			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=100\text{V}$, $I_E=0$			100	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=5\text{V}$, $I_C=0$			1	mA
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=1\text{A}$, $I_B=100\text{mA}$			0.6	V
DC Current Gain	$h_{FE(1)}$	$I_C=150\text{mA}$, $V_{CE}=2\text{V}$	40			
	$h_{FE(2)}$	$I_C=1\text{A}$, $V_{CE}=2\text{V}$	25			
Transition Frequency	f_T	$I_C=250\text{mA}$, $V_{CE}=10\text{V}$, $f=10\text{MHz}$	3			MHz

TR2

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-1\text{mA}$, $I_E=0$	-100			V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-100\text{mA}$, $I_B=0$	-80			V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_C=-1\text{mA}$, $I_E=0$	-5			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-100\text{V}$, $I_E=0$			-100	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-5\text{V}$, $I_C=0$			-1	mA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-2\text{V}$, $I_C=-150\text{mA}$	40			
	$h_{FE(2)}$	$V_{CE}=-2\text{V}$, $I_C=-1\text{A}$	25			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-1\text{A}$, $I_B=-100\text{mA}$			-0.6	V
Transition Frequency	f_T	$V_{CE}=-10\text{V}$, $I_C=-250\text{mA}$, $f=10\text{MHz}$	3			MHz

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.