



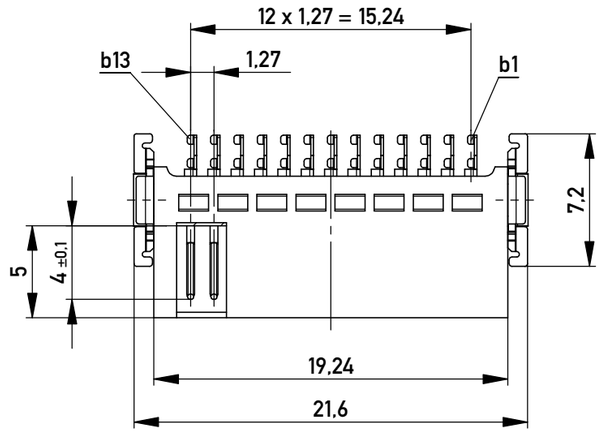




Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

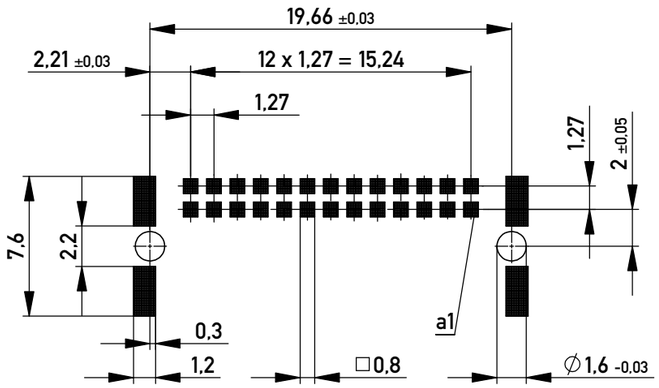

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 560 Stück
Packaging unit: 560 pcs

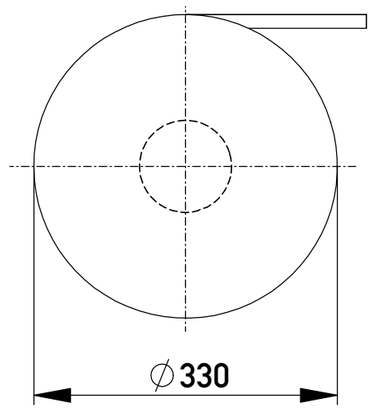

Abspulrichtung - *Reel off Direction*

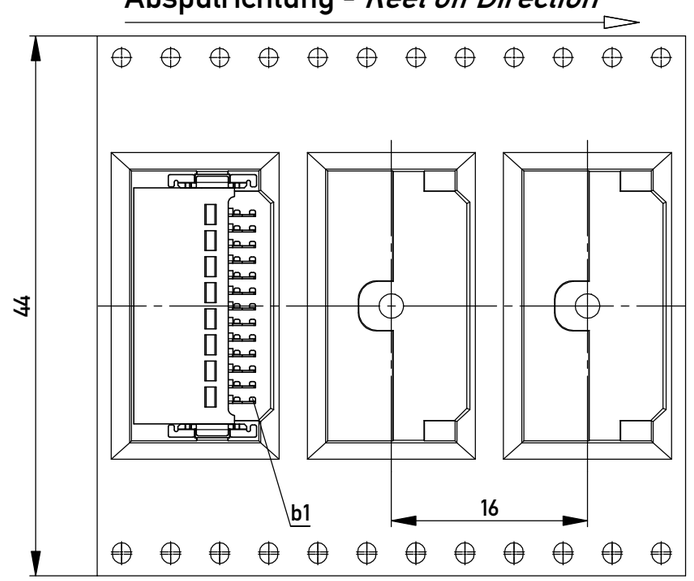

BA3-03 - Standard Bauhöhe
type3-03 - Standard Assembly Height

Information:

Tolerances

All Dimensions in mm

Scale 3:1

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

ERNI www.ERNI.com

Designation
Messerl. SMC-B 26-SMD-BA3-03
Male SMC-B 26-SMT-type3-03

100303370001

K

A3

Index	Date
e	22.01.2014

Class SMCB