New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (201) 376-2922
(212) 227-6005
FAX: (201) 376-8960


NPN
BD785, BD787
PNP
BD786, BD788

COMPLEMENTARY PLASTIC SILICON ANNULAR♦ POWER TRANSISTORS

. . . designed for low power audio amplifier and low current, high-speed switching applications.

- Low Collector-Emitter Sustaining Voltage –
  V_{CEO} (sus) 45 Vdc (Min) – BD785, BD786
  60 Vdc (Min) – BD787, BD788
- High Current-Gain – Bandwidth Product –
  f_T = 50 MHz (Min) @ I_C = 100 mAdc
- DC Current Gain Specified at 0.2, 1.0, 2.0 and 4.0 Adc
- Collector-Emitter Saturation Voltage Specified at 0.5, 1.0, 2.0 and 4.0 Adc

4 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON 45, 60VOLTS 15 WATTS

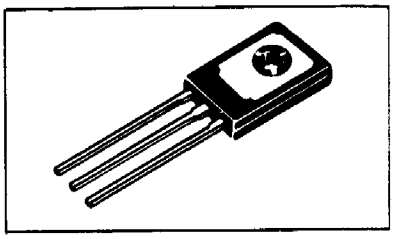


*MAXIMUM RATINGS


Rating	Symbol	BD785 BD786	BD787 BD788	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	Vdc
Collector-Base Voltage	V_{CBO}	60	80	Vdc
Emitter-Base Voltage	V_{EBO}	6.0		Vdc
Collector Current – Continuous – Peak	I_C	4.0 8.0		Adc Adc
Base Current	I_B	1.0		Adc
Total Power Dissipation @ T_C = 25°C Derate Above 25°C	P_D	15 0.12		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.34	°C/W

FIGURE 1 – POWER DERATING

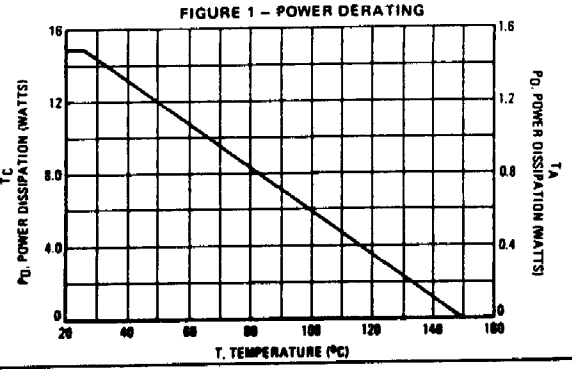

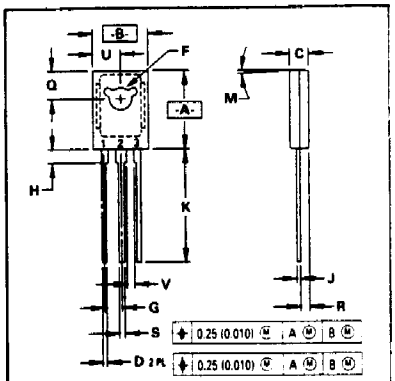

NOTES
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.39 BSC		0.094 BSC	
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.68	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

TO-225AA TYPE

Quality Semi-Conductors

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (201) 376-2922
(212) 227-6005
FAX: (201) 376-8960

BD785, BD787 NPN
BD786, BD788 PNP


***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 10 mAdc, I_B = 0)	BD785, BD786	$V_{CEO(sus)}$	45	–	Vdc
	BD787, BD788		60	–	
Collector Cutoff Current (V_{CE} = 20 Vdc, I_B = 0)	BD785, BD786	I_{CEO}	–	100	μAdc
(V_{CE} = 30 Vdc, I_B = 0)	BD787, BD788		–	100	
Collector Cutoff Current (V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	BD785, BD786	I_{CEX}	–	1.0	μAdc
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	BD787, BD788		–	1.0	
(V_{CE} = 30 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	BD785, BD786		–	0.1	mAdc
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C	BD787, BD788		–	0.1	
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	μAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 200 mAdc, V_{CE} = 3.0 Vdc)		h_{FE}	40	250	–
(I_C = 1.0 Adc, V_{CE} = 3.0 Vdc)			25	–	
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)			20	–	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)			5.0	–	
Collector-Emitter Saturation Voltage (I_C = 500 mAdc, I_B = 50 mAdc)		$V_{CE(sat)}$	–	0.4	Vdc
(I_C = 1.0 Adc, I_B = 100 mAdc)			–	0.6	
(I_C = 2.0 Adc, I_B = 200 mAdc)			–	0.8	
(I_C = 4.0 Adc, I_B = 800 mAdc)			–	2.5	
Base-Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 200 mAdc)		$V_{BE(sat)}$	–	2.0	Vdc
Base-Emitter on Voltage (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)		$V_{BE(on)}$	–	1.8	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 10 MHz)		f_T	50	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_C = 0)	BD785, BD787	C_{ob}	–	50	pF
f = 0.1 MHz)	BD786, BD788		–	70	
Small-Signal Current Gain (I_C = 200 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	10	–	–

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

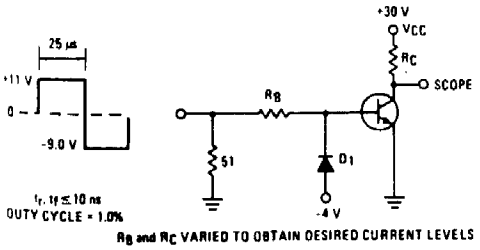

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ≈100 mA
MSD6100 USED BELOW I_B ≈100 mA

FOR PNP TEST CIRCUIT, REVERSE ALL POLARITIES

FIGURE 3 – TURN-ON TIME

