




M2 Series 10-15 Watt

FEATURES

- Cispr 22'B' , Vcci' B' , Fcc' B' Compliance
- Light Weight: 140g only
- Efficiency 71%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40

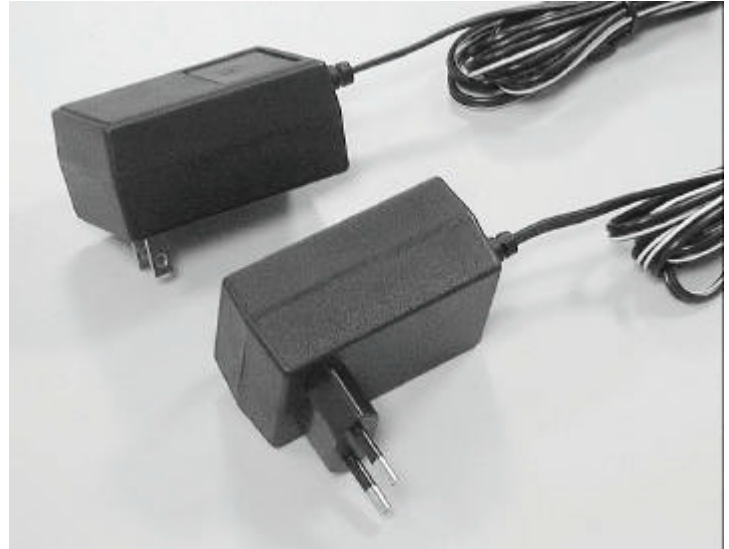

SPECIFICATION


Item \ Model	* M2-10US05	* M2-12US05	* M2-15US05
Output Voltage	5V	5V	5V
Output Current	2.0A	2.5A	3.0A
Input Voltage	AC 90~264V		
Input Frequency	47~63Hz		
Input Current	0.6A Maximum		
Inrush Current	50A Maximum		
Line Regulation	2% Maximum		
Load Regulation	±5%		
Ripple & Noise	1% Maximum		
Efficiency	71% Typical		
Temperature Coefficient	0.05%/		
Over-Voltage Protection	10V Maximum		
Operating Temperature	0~40		
Storage Temperature	-20~85		
Safety Description	Fig. A	---	
	Fig. B	---	
	Fig. C	---	
	Fig. D	---	
	Fig. E	---	

(*): Under Development (P): In Process




M2 Series 10-15 Watt

ORDERING INFORMATION

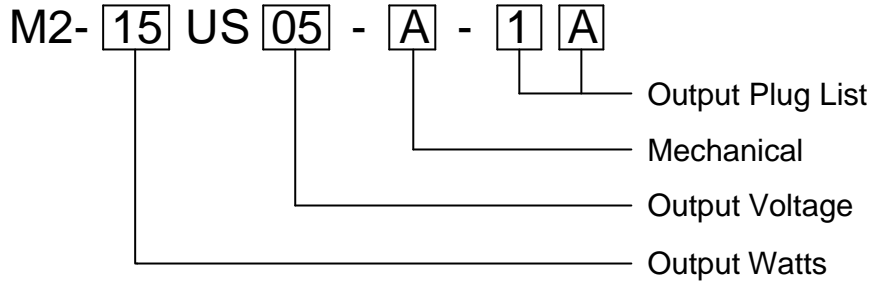

MECHANICAL

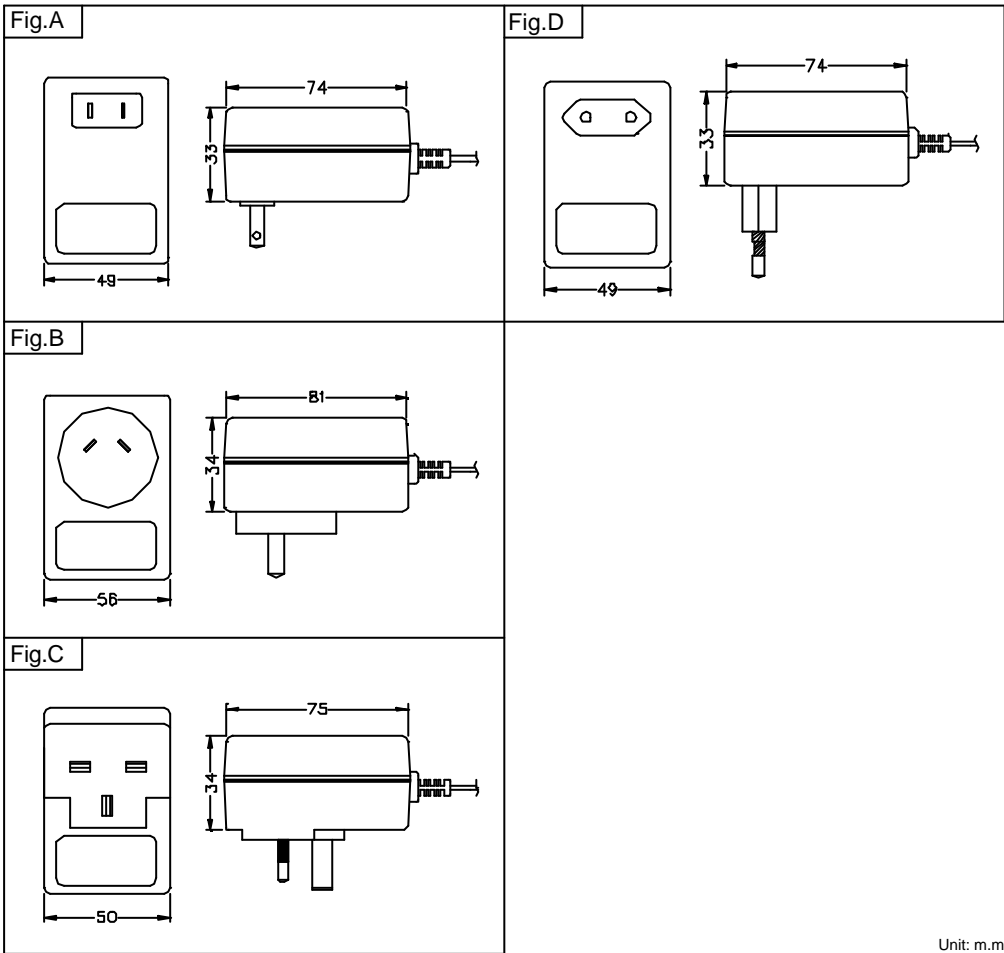

Unit: m.m.

Standard Output Cable:
5V: 18AWG, UL SPT-1, 1800mm