


SMART-DAA Transformer

- Approved by Conexant for their SMART-DAA solution
- RoHS Compliant
- Surface Mountable package
- Operating Temperature 0°C~70°C

Electrical Specifications @25°C	
OCL:	30uH Min. @10KHz/10mVrms
Turn Ratio:	Pri:Sec=1:2±1%
Hi-POT :	2000 Vrms
D.C.R:	Pri: 0.225 ohm Max. Sec: 0.325 ohm Max.

Dimensions

Schematic

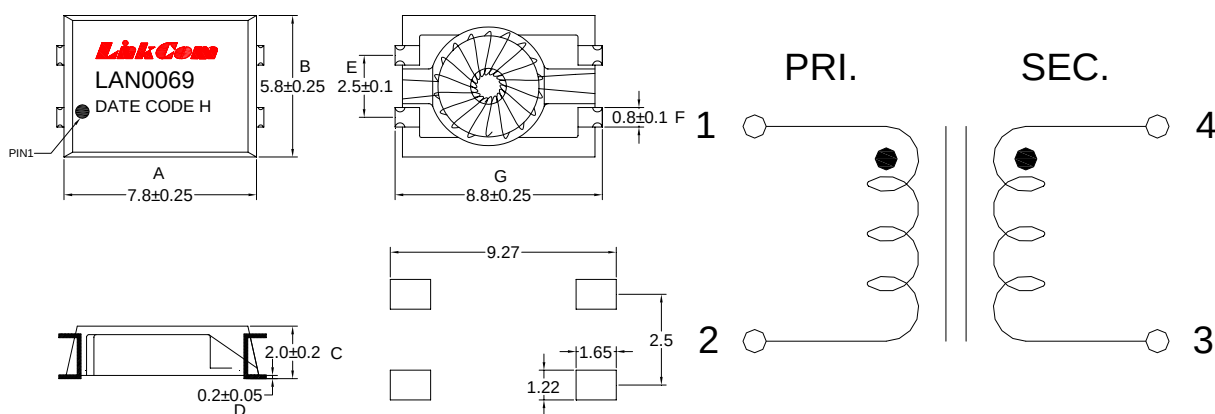

Units: mm

Unless otherwise specified, all tolerances are ±0.25