

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010011104](#)
Status: **Active**
Overview: [kk](#)
Description: 5.08mm (.200") Pitch KK® Crimp Terminal Housing, 10 Circuits

Documents:

[3D Model](#) [Product Specification PS-99020-0087 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family Crimp Housings
 Series [3001](#)
 Overview [kk](#)
 Product Name KK®

Physical

Circuits (maximum) 10
 Color - Resin Natural
 Flammability 94V-2
 Gender Female
 Glow-Wire Compliant No
 Material - Resin Nylon
 Number of Rows 1
 Packaging Type Bag
 Panel Mount No
 Pitch - Mating Interface (in) 0.200 In
 Pitch - Mating Interface (mm) 5.08 mm
 Temperature Range - Operating -40°C to +105°C

Solder Process Data


Lead-free Process Capability Wave Capable (TH only)

Material Info

Old Part Number 3001-10

Reference - Drawing Numbers

Product Specification PS-99020-0087
 Sales Drawing SDE-3001-N*

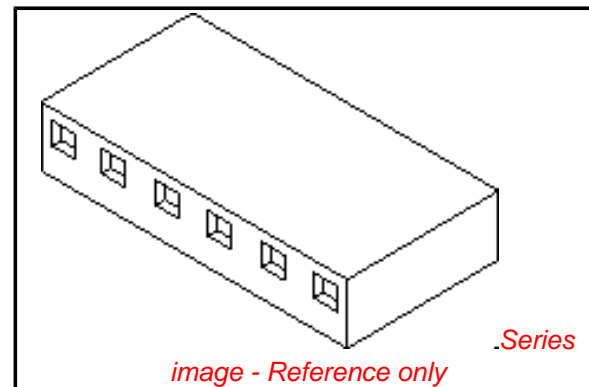

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free Status

China RoHS



Halogen-Free

Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series


[3001Series](#)

Mates With


[3061](#) , [3003](#) , [3008](#)

Use With


[2478](#) Crimp Terminals for 18-24 AWG, [2578](#) Crimp Terminals for 22-26 AWG, [2878](#)

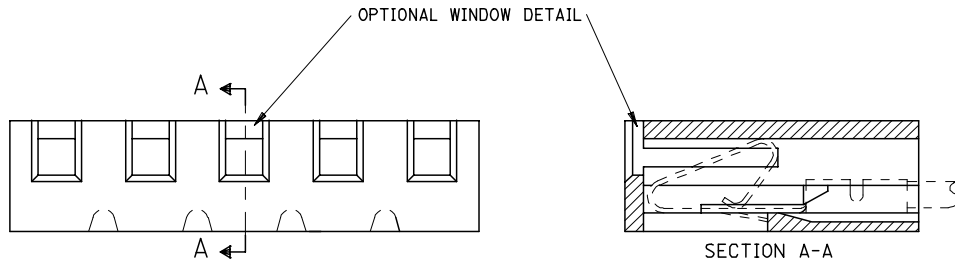

NOTE :
 1. DIMENSIONS SHOWN MILLIMETERS
 INCHES
 2. FOR OTHER PRODUCT SPEC'S. SEE PSX 10-39.
 3. THIS HOUSING USES KK TERM. No's. 2478, 2578 & 28

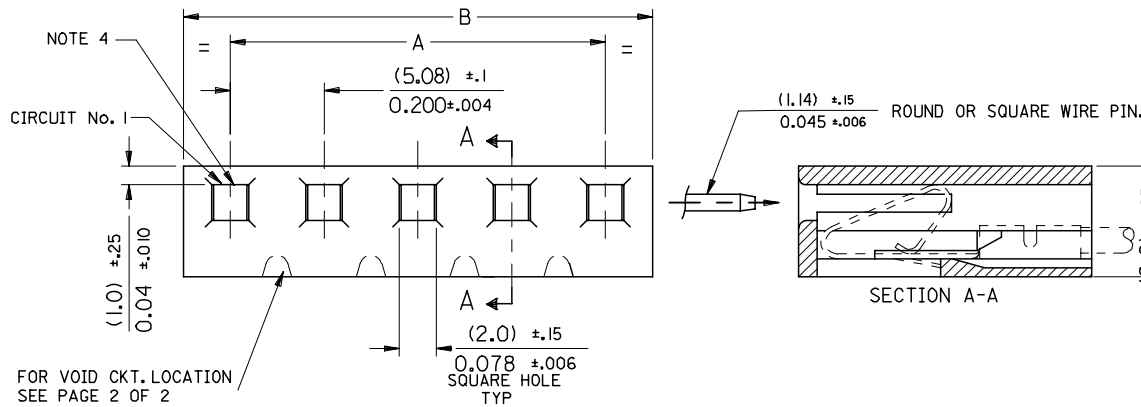

FOR VOID CKT. LOCATION
SEE PAGE 2 OF 2

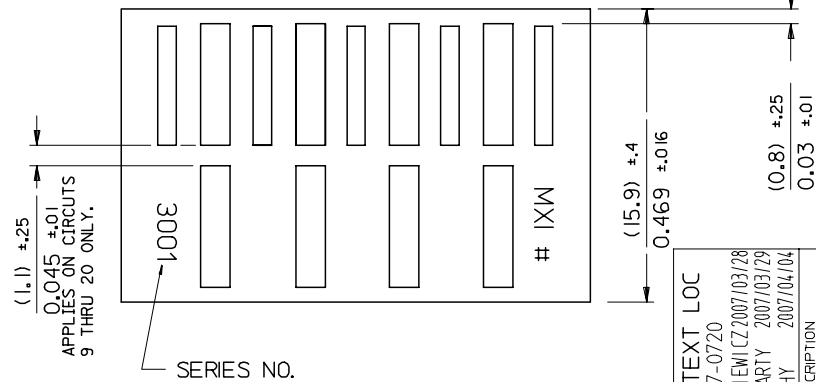

MAT'L: NYLON

CENTER RIB ONLY

10-01-1204	E-3001-20	3,800 ±.012	4,000 ⁺⁰ _{-.016}	96.52 ±0.3	101.60 ⁺⁰ _{-.15}
-1194	-19	3,600 ±.012	3,800 ⁺⁰ _{-.016}	91.44 ±0.3	96.52 ⁺⁰ _{-.15}
-1184	-18	3,400 ±.012	3,600 ⁺⁰ _{-.016}	86.36 ±0.3	91.44 ⁺⁰ _{-.15}
-1174	-17	3,200 ±.012	3,400 ⁺⁰ _{-.016}	81.28 ±0.3	86.36 ⁺⁰ _{-.15}
-1164	-16	3,000 ±.010	3,200 ⁺⁰ _{-.016}	76.20 ±0.25	81.28 ⁺⁰ _{-.15}
-1154	-15	2,800 ±.010	3,000 ⁺⁰ _{-.012}	71.12 ±0.25	76.20 ⁺⁰ _{-.15}
-1144	-14	2,600 ±.010	2,800 ⁺⁰ _{-.012}	66.04 ±0.25	71.12 ⁺⁰ _{-.15}
-1134	-13	2,400 ±.010	2,600 ⁺⁰ _{-.012}	60.96 ±0.25	66.04 ⁺⁰ _{-.15}
-1124	-12	2,200 ±.010	2,400 ⁺⁰ _{-.012}	55.88 ±0.25	60.96 ⁺⁰ _{-.15}
-1114	-11	2,000 ±.008	2,200 ⁺⁰ _{-.012}	50.80 ±0.20	55.88 ⁺⁰ _{-.15}
-1104	-10	1,800 ±.008	2,000 ⁺⁰ _{-.008}	45.72 ±0.20	50.80 ⁺⁰ _{-.15}
-1094	-9	1,600 ±.008	1,800 ⁺⁰ _{-.008}	40.64 ±0.20	45.72 ⁺⁰ _{-.15}
-1084	-8	1,400 ±.008	1,600 ⁺⁰ _{-.008}	35.56 ±0.20	40.64 ⁺⁰ _{-.15}
-1074	-7	1,200 ±.008	1,400 ⁺⁰ _{-.008}	30.48 ±0.20	35.56 ⁺⁰ _{-.15}
-1064	-6	1,000 ±.004	1,200 ⁺⁰ _{-.008}	25.40 ±0.10	30.48 ⁺⁰ _{-.15}
-1054	-5	.800 ±.004	1,000 ⁺⁰ _{-.006}	20.32 ±0.10	25.40 ⁺⁰ _{-.15}
-1044	-4	.600 ±.004	.800 ⁺⁰ _{-.006}	15.24 ±0.10	20.32 ⁺⁰ _{-.15}
-1034	-3	.400 ±.004	.600 ⁺⁰ _{-.006}	10.16 ±0.10	15.24 ⁺⁰ _{-.15}
-1024	-2	.200 ±.004	.400 ⁺⁰ _{-.006}	5.08 ±0.10	10.16 ⁺⁰ _{-.15}
10-01-1014	E-3001-1		.200 ⁺⁰ _{-.006}		5.08 ⁺⁰ _{-.15}
PART No.	ENG. No.	ENGLISH		METRIC	
		A	B	A	B

CORRECT TEXT LOC
 EC NO: E2007-0720
 DRWN: DWASZKI EMI CZ 2007/03/28
 CHKD: D. MOR ARTY 2007/03/29
 APPR: DENNEHY 2007/04/04

QUALITY SYMBOLS
 ▽=0
 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.35	± ---

ANGULAR ±1/2°

DIMENSION STYLE
MM/IN

SCALE
7:1

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

DRAWN BY P. MOORE **DATE** 1998/09/15
CHECKED BY MGOONEY **DATE** 1999/03/12
APPROVED BY MWILHITE **DATE** 1999/03/12

TITLE 5.08MM KK CRP TERM HSG

MATERIAL NO. SEE CHART **DOCUMENT NO.** SDE-3001-N-* **SHEET NO.** 1 OF 1

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

