



Description



The 466 Series Fast-Acting Surface Mount Fuse (SMF) is a small (1206 size) thin-film device designed for secondary protection of circuits used in space constrained applications such as hand-held portable electronic devices.

This series is 100% lead-free and meets the requirements of the RoHS directive. New Halogen-Free 466 Series fuses are available to order using the "HF" suffix. See Part Numbering section for additional information.

Features

- Product is compatible with lead-free solders and higher temperature profiles
- Product is marked on top surface with code to allow amperage rating identification without testing
- Low profile for height sensitive applications
- Flat top surface for pick-and-place operations
- Element-covering material is resistant to industry standard cleaning operations
- Mounting pad and electrical performance are identical to Littelfuse 429 and 433 Series products
- Alloy-based element construction provides superior inrush withstand characteristics (I^2t) over ceramic or glass-based 1206 chip fuse products

Agency Approvals

| AGENCY | AGENCY FILE NUMBER | AMPERE RANGE |
|---|--------------------|--------------|
|  | E10480 | 125mA - 5A |
|  | LR29862 | 125mA - 5A |

Electrical Characteristics for Series



| % of Ampere Rating | Opening Time at 25°C |
|--------------------|----------------------|
| 100% | 4 hours, Minimum |
| 200% | 5 sec., Maximum |
| 300% | 0.2 sec., Maximum |

Applications

Secondary protection for space constrained applications:

- Cell phones
- Battery packs
- Digital cameras
- DVD players
- Hard disk drives


Electrical Specifications by Item

| Ampere Rating (A) | Amp Code | Max Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I^2t (A ² sec) | Nom Voltage Drop (mV) | Nom Power Dissipation (W) | Agency Approvals | |
|-------------------|----------|------------------------|---------------------|--------------------------------|---|-----------------------|---------------------------|---|---|
| | | | | | | | |  |  |
| 0.125 | .125 | 125 | 50A @125 V AC/DC | 4.000 | 0.00040 | 552.66 | 0.0691 | x | x |
| 0.200 | .200 | 125 | | 1.160 | 0.00055 | 254.28 | 0.0509 | x | x |
| 0.250 | .250 | 125 | | 0.710 | 0.0010 | 207.01 | 0.0518 | x | x |
| 0.375 | .375 | 125 | 50A @63 V AC/DC | 0.350 | 0.0028 | 169.18 | 0.0634 | x | x |
| 0.500 | .500 | 63 | | 0.248 | 0.0060 | 158.47 | 0.0792 | x | x |
| 0.750 | .750 | 63 | | 0.111 | 0.0276 | 98.65 | 0.0740 | x | x |
| 1.00 | 001. | 63 | | 0.076 | 0.0423 | 89.94 | 0.0899 | x | x |
| 1.25 | 1.25 | 63 | | 0.059 | 0.0640 | 85.71 | 0.1071 | x | x |
| 1.50 | 01.5 | 63 | | 0.048 | 0.1103 | 82.97 | 0.1244 | x | x |
| 1.75 | 1.75 | 63 | 50A @32 V AC/DC | 0.039 | 0.1323 | 80.73 | 0.1413 | x | x |
| 2.00 | 002. | 63 | | 0.031 | 0.2326 | 78.73 | 0.1575 | x | x |
| 2.50 | 02.5 | 32 | | 0.024 | 0.3516 | 76.99 | 0.1925 | x | x |
| 3.00 | 003. | 32 | | 0.020 | 0.5760 | 75.99 | 0.2280 | x | x |
| 4.00 | 004. | 32 | | 0.014 | 1.024 | 74.50 | 0.2980 | x | x |
| 5.00 | 005. | 32 | | 0.011 | 1.600 | 73.75 | 0.3688 | x | x |

1. Measured at 10% of rated current, 25°C.

2. Measured at rated voltage.

Temperature Derating Curve

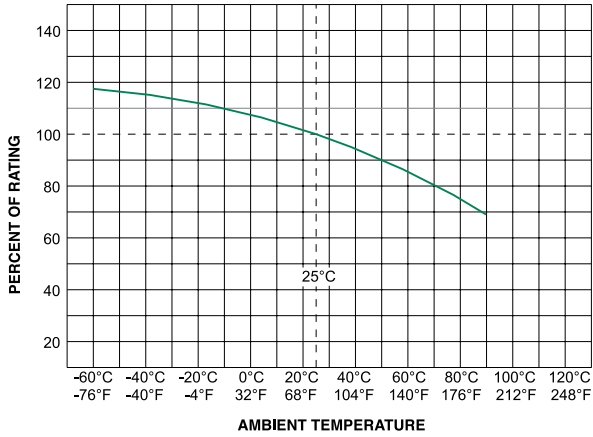

Note:

1. Derating depicted in this curve is in addition to the standard rating of 25% for continuous operation.


Example:

For continuous operation at 70 degrees celsius, the fuse should be rated as follows:

$$I = (0.75)(0.80)I_{RAT} = (0.60)I_{RAT}$$


2. The temperature derating curve represents the nominal conditions. For questions about temperature derating curve, please consult Littelfuse technical support for assistance.

Average Time Current Curves

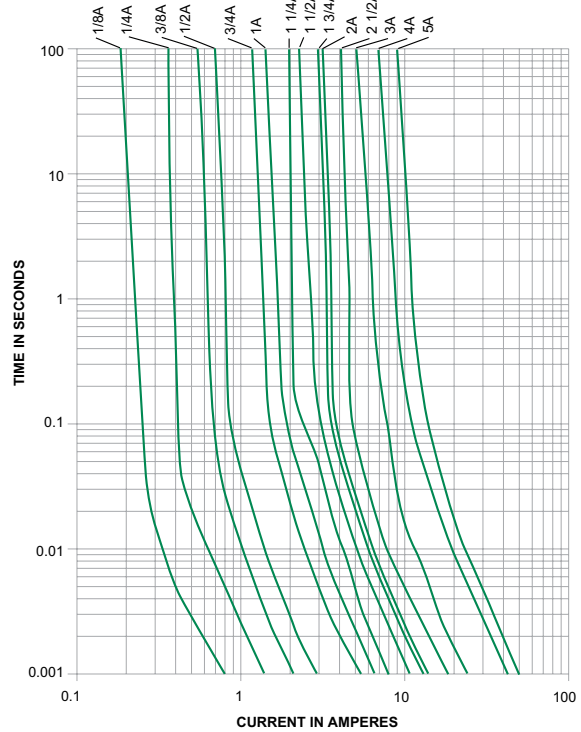

Soldering Parameters

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Pb – free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (Min to Max) (t_s) | 60 – 180 seconds |
| Average Ramp-up Rate (Liquidus Temp (T_L) to peak) | | 5°C/second max. |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 5°C/second max. |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Temperature (t_L) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 250 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 seconds |
| Ramp-down Rate | | 5°C/second max. |
| Time 25°C to peak Temperature (T_p) | | 8 minutes max. |
| Do not exceed | | 260°C |

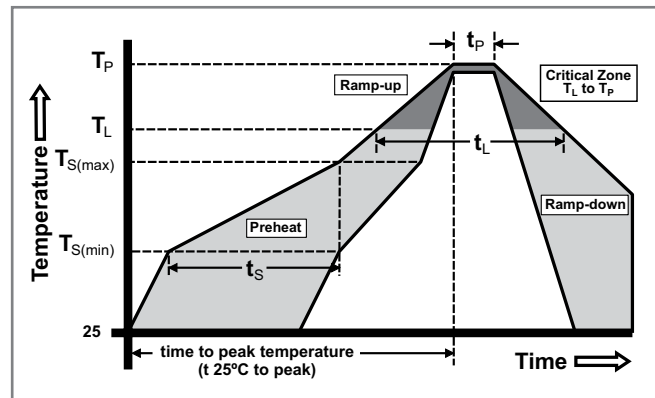

Wave Soldering


260°C, 10 seconds max.

Product Characteristics

| | |
|------------------------------|---|
| Materials | Body: Advanced High Temperature Substrate Terminations: 100% Tin over Nickel over Copper Element Cover Coat: Conformal Coating |
| Operating Temperature | - 55°C to 90°C. Consult temperature derating curve chart. |
| Thermal Shock | Withstands 5 cycles of -55°C to 125°C |
| Humidity | MIL-STD-202F, Method 103B, Condition D |

| | |
|--|--|
| Vibration | Per MIL-STD-202F, Method 201A |
| Insulation Resistance (After Opening) | Greater than 10,000 ohms |
| Resistance to Soldering Heat | MIL-STD-202G, Method 210F, Condition D |

Dimensions

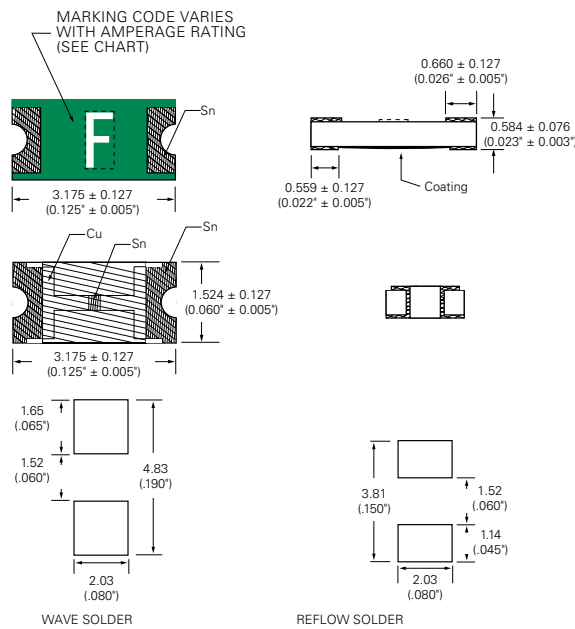

Part Marking System

| Amp Code | Marking Code |
|----------|--------------|
| .125 | B |
| .200 | C |
| .250 | D |
| .375 | E |
| .500 | F |
| .750 | G |
| 001. | H |
| 1.25 | J |
| 01.5 | K |
| 1.75 | L |
| 002. | N |
| 02.5 | O |
| 003. | P |
| 004. | S |
| 005. | T |

Part Numbering System

0466002.NRHF

SERIES

AMP Code

Refer to Amp Code column in the Electrical Specifications table. The dot is positioned before the Packaging Suffix with whole ratings and within the numbering sequence for fractional ratings.

QUANTITY Code

N = 5000 pcs

PACKAGING Code

R = Tape and Reel

'HF' SUFFIX

HALOGEN FREE ITEM

Example:

.125 amp product is 0466.**125** NR HF (2 amp product shown above).

Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code |
|-------------------|------------------------------------|----------|---------------------------|
| 8mm Tape and Reel | EIA-481 Rev. D (IEC 60286, part 3) | 5000 | NR |