


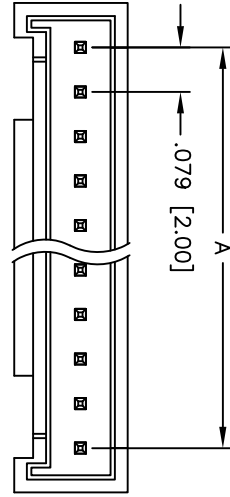


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/10	

APPROVED: _____
 DATE: _____ TITLE: _____

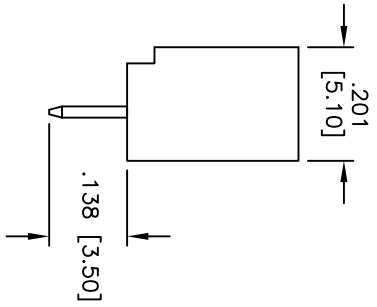

RECOMMENDED PCB LAYOUT

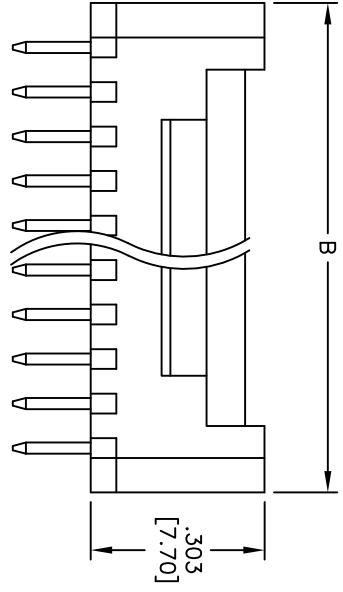

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: White
 Contacts: Brass

Plating: Tin over Copper underplate overall

Electrical: Operating voltage: 250V AC/DC

Current rating: 3A AC/DC

Contact resistance: 20 mohms max

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating: Operating temperature: -25°C to +85°C

Environmental: Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 16
 A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ϕ .X ± .10
.XX ± .020	ϕ .XX ± .015
.XXX ± .015	ϕ .XXX ± .010

DRAWN		DRY	12/10/10	TITLE	
CHECKED				.079 [2.00] SHRROUDED HEADER	
APPROVED				STRAIGHT, PCB	
APPROVALS			DATE	PART NO.	
APPROVED				2SH-K-XX-TS	
APPROVED				SCALE: NTS	
APPROVED				SHEET 1 OF 1	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SIZE X

REF: S0004T

6 5 4 3 2 1

