Silicon NPN Power Transistors 2N6671 2N6672 2N6673

DESCRIPTION

- With TO-3 package
- Low saturation voltage
- Fast switching speed
- High voltage ratings

APPLICATIONS

- Off-line power supplies
- High-voltage inverters
- Switching regulators

PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings(Ta=℃)

SYMBOL	PARAMETER		CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	2N6671	Open emitter	450	V
		2N6672		550	
		2N6673		650	
V_{CEO}	Collector-emitter voltage	2N6671	Open base	300	V
		2N6672		350	
		2N6673		400	
V_{EBO}	Emitter-base voltage		Open collector	8	V
I_C	Collector current			8	A
I_{CM}	Collector current-peak			10	A
I_B	Base current			4	A
P_D	Total Power Dissipation		T_C=25℃	150	W
T_j	Junction temperature			200	℃
T_{stg}	Storage temperature			-65~200	℃

Silicon NPN Power Transistors 2N6671 2N6672 2N6673

CHARACTERISTICS

Tj=25℃ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-emitter sustaining voltage	2N6671	I_C=0.2A ;I_B=0	300			V
		2N6672		350			
		2N6673		400			
$V_{CEsat-1}$	Collector-emitter saturation voltage		I_C=5A; I_B=1A			1.0	V
$V_{CEsat-2}$	Collector-emitter saturation voltage		I_C=8A ;I_B=4A			2.0	V
V_{BEsat}	Base-emitter saturation voltage		I_C=5A; I_B=1A			1.6	V
I_{CEV}	Collector cut-off current	2N6671	V_{CE}=450V; $V_{BE(off)}$=-1.5V			0.1	mA
		2N6672	V_{CE}=550V; $V_{BE(off)}$=-1.5V				
		2N6673	V_{CE}=650V; $V_{BE(off)}$=-1.5V				
I_{EBO}	Emitter cut-off current		V_{EB}=8V; I_C=0			2.0	mA
h_{FE}	DC current gain		I_C=5A ; V_{CE}=3V	10		40	
C_{OB}	Output capacitance		I_E=0 ; V_{CB}=10V;f=0.1MHz			300	pF
f_T	Transition frequency		I_C=0.2A ; V_{CE}=10V	15		60	MHz

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j\text{-}c}$	Thermal resistance junction to case	1.17	℃/W

Silicon NPN Power Transistors 2N6671 2N6672 2N6673

PACKAGE OUTLINE

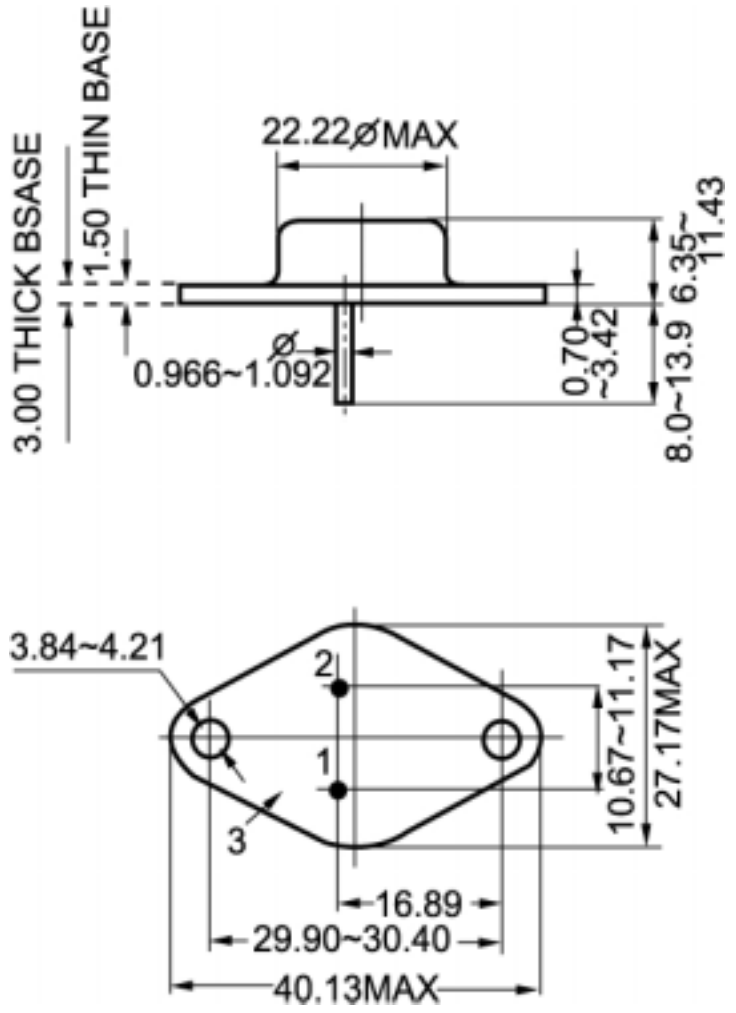

Fig.2 outline dimensions (unindicated tolerance:±0.10mm)