


Top View



Side View


- 1 Substrate: 3.18mm \pm 0.125mm [0.125" \pm 0.005"]
FR4/G10 or equivalent high temp material. Non-clad.
- 2 Pin: Brass - PS-2
Plating: 10u" Au over 50u" Ni min.

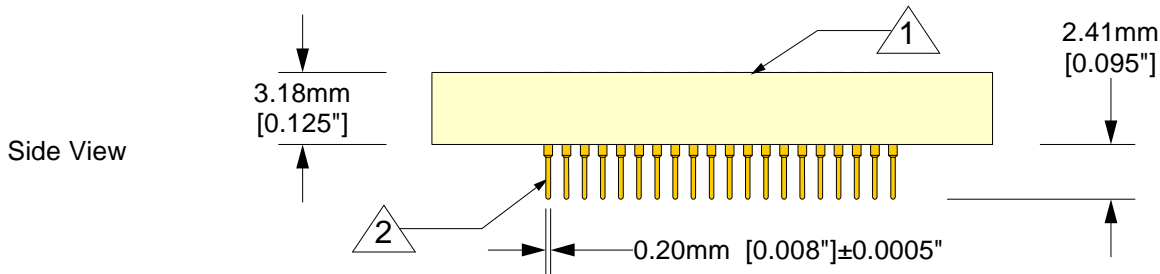

Description: Thru hole Adaptor

363 position surface mount land pattern to terminal pins (0.8mm centers 20x20 array). To be used with GHz sockets.

Tolerances: diameters \pm 0.03mm [\pm 0.001"], PCB perimeters \pm 0.13mm [\pm 0.005"], PCB thicknesses \pm 0.18mm [\pm 0.007"], pitches (from true position) \pm 0.08mm [\pm 0.003"], all other tolerances \pm 0.13mm [\pm 0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

LS-BGA363A-05 Drawing		Status: Released	Scale: 6:1	Rev: B
 <p>© 2009 IRONWOOD ELECTRONICS, INC. Tele: (800) 404-0204 www.ironwoodelectronics.com</p>	Drawing: Vinayak R		Date: 4/2/09	
	File: LS-BGA363A-05 Dwg.mcd		Modified: 11/12/09 MT/MR	