


Stecklänge / mating length


ESL  
E = early mate, late break / vorellend  
S = standard  
L = late mate, early break / nachellend

Bestückungsplan / contact layout

32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

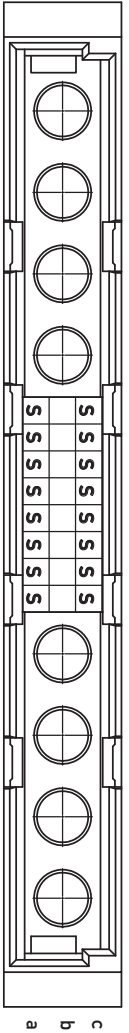

Leiterplatten-Lochbild / PCB drillhole pattern

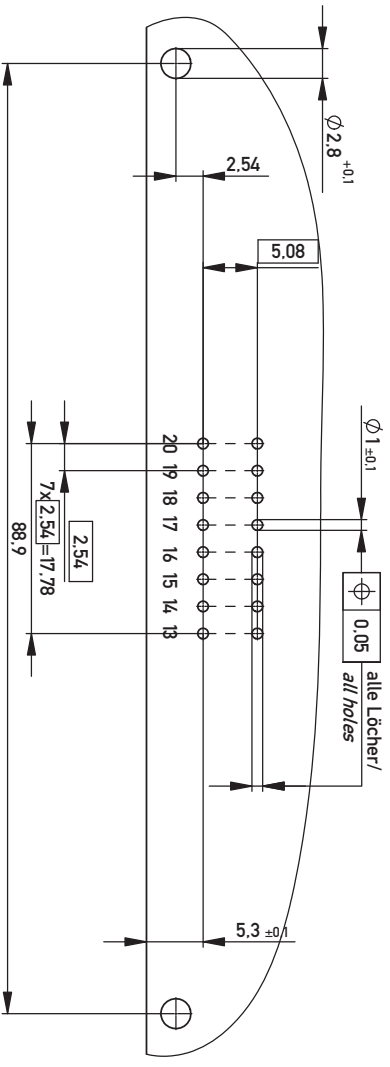

Lötanschluss 0,6x0,6mm / solder terminal 0,6x0,6mm  
 Isolierwerkstoff / housing material: PBT GF 30  
 Bauart 4 / type 4  
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles  
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2  
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Bedruckung siehe Zeichnung 294905  
 Marking see drawing 294905

Information: 1 - 52 7-10, 18-20, 27-49		Tolerances		Scale: 2:1	
All rights reserved. Only for information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
www.ERNI.com		All Dimensions in mm		Messerleiste M 16-8 Löt Male Connector 16-8 solder	
Index	Date	ERNI		Class	STVM
					A3

Copyright by ERNI GmbH  
 Proprietary notice pursuant to ISO 16016 to be observed.